



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Smart Technology. Delivered.

87580 Nickel/Copper Fabric Tape



UL510-FR RATED NI/CU CONDUCTIVE FABRIC TAPE

Laird Technologies' Conductive Fabric Tape 87580 offers exceptional conformability and conductivity for dynamic flex applications. It is constructed of nickel/copper metallized fabric with a conductive pressure sensitive adhesive (PSA). This reliable tape design provides outstanding shielding performance while offering superior abrasion and corrosion resistance under high dynamic flex conditions.

The 87580 Conductive Fabric Tape offers two colors and various thicknesses. All are RoHS compliant, halogen free and UL510-FR rated.

FEATURES

- RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Low surface resistivity of $< 0.04 \Omega/\square$ (gray) or $< 0.06 \Omega/\square$ (black) provides excellent conductivity
- Shielding effectiveness of 75 dB across a wide spectrum of frequencies

MARKETS

- Cabinet applications
- LCD and Plasma TV
- Medical equipment
- Servers
- Printers
- Laptop computers




USA: +1.866.928.8181
Europe: +49.0.8031.2460.0
Asia: +86.755.2714.1166

www.lairdtech.com

Item	Unit	Value				Test Method
		87580-STD	87580-285	87580-751	87580-250	
Thickness	mm	0.13 ± 0.02	0.125 ± 0.02	0.085 ± 0.015	0.080 ± 0.015	-
Color	-	Gray	Black	Gray	Black	-
Peel Adhesion	Kgf / 25 mm	>0.8	>0.8	>0.8	>0.8	PSTC 101*
Shear Adhesion at R.T.	Hrs	>168	>168	>72	>72	PSTC 107#
Shear Adhesion at 80°C	Hrs	>5	>5	>3	>3	PSTC 107#
Flammability	-	Pass	Pass	Pass	Pass	UL510-FR UL No.E239083
Operation Temperature	°C	-10~80	-10~80	-10~80	-10~80	
Max Temperature (Short Term)	°C	120	120	120	120	
Surface Resistivity (Fabric Side)	Ω/□	<0.03	<0.06	<0.04	<0.06	ASTM F390
Z-axial Resistance	Ω	<0.04	<0.04	<0.04	<0.04	
Shielding Effectiveness*						ASTM D4935
at 100 MHz	dB	75	75	70	70	
at 1GHz	dB	77	77	75	75	
Package Dimensions	M	W: Dimension by Customer Spec L: Standard Length of 20 M				
Shelf Life (Under 23°C/65% R.H.)		Six Months				

*:Test Method A, dwell time 30 min. #:Contact area 25 mm by 25 mm +:Typical value

COMPOSITION OF PRODUCT

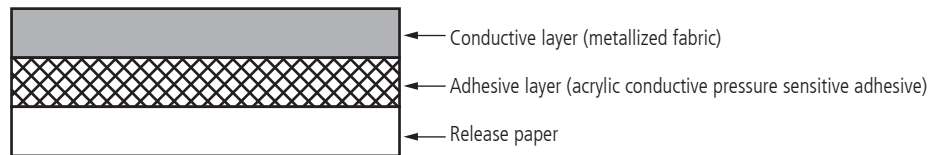

EMI-DS-FOF-87580 0413

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.