

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








## MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC [ ]


Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.



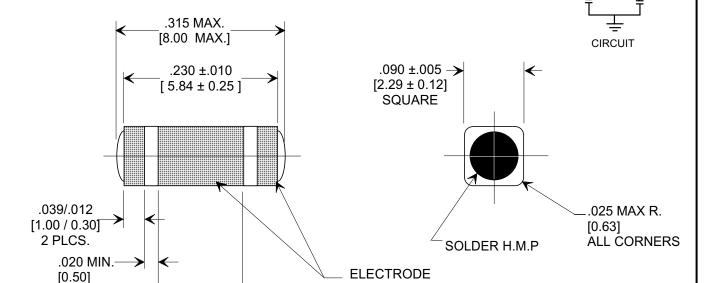

**TERMINATION** 

SEE NOTE 5

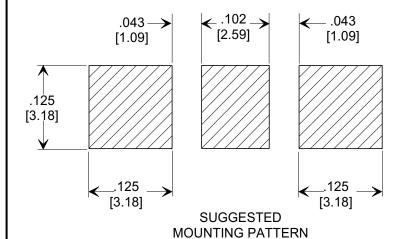

.126/.099

[3.20 / 2.51]

2 PLCS.

- 1. INDUCTANCE TO BE 0.1 H MINIMUM.
- 2. PACKAGE: BULK OR BLISTER TAPE TO IEC-60286-3 TYPE II AND EIA-481-A.
- 3. TUSONIX STANDARD PART NUMBER: 4700-003. TUSONIX ROHS COMPLIANT PART NUMBER: 4700-003 LF.

CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.

- PART MARKING: STANDARD PART: NO MARKING. RoHS PART: LABELED ON PACKAGING ONLY.
- 5. ELECTRODE TERMINATION: STANDARD 60/40 SOLDER; RoHS COMPLIANT MATTE TIN.

CAP.		2	TOLERANCE			- L	WVDC					TEST		I.R.MI	N. @	IDC	TYPICAL NO LOAD INSERTION LOSS dB AT 25°C PER MIL-STD-220					
CAP.			TOLERANCE				85°	°C	+1	+125°C		VOLTAGE		100 (V	DC.)	100	10 MHZ		100 MHZ		1 GHZ	
	2000 pF			GMV			100			100		300 VDC		10 G		10 A	10		45	45 70		
X-2015 Rev-0 REVISION RECORD		ADDED DC COLUMN E.C 10-26-94	941020-1 1	DIM230 WAS .238 E.C. 11-16-94	41020-1 2	ITATI 100	S.M. 02-13-03	20030213-1-12 3	REVISED DRAWING. S.M. 06-20-03	20030619-2-01 4	S 3,4 & 5.	5-02 5			DECI	TOLERANCES Unless Otherwise Specified  DECIMAL ± .005 [0.13]  ANGLES ±		Title Drawn	SURFACE MOUNT SQUARE STYLE PI FILTER  FG 9-9-94  Scale 7 X			
	8 <b>2</b>		REISSUE		REISSUE 9	REVISED DW SYMBOL & 1.I	(VDC) ADDED				ADDED NOTE S.M. 06-10-05	050607-			T	USON, AR	VIX RIZONA	Approve	ed NV 9-9-	94	.003	