



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model 4702 Banana Plug To In-Line Banana Jack

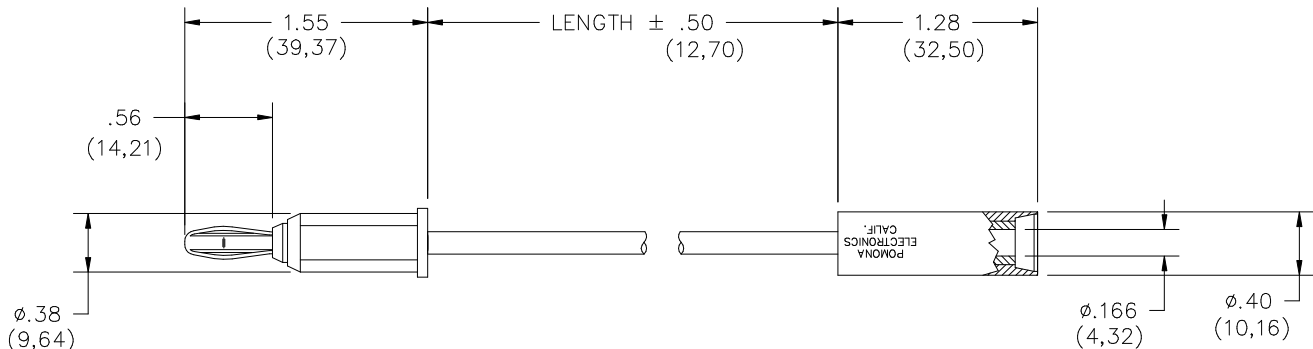

### FEATURES:

- Dual Purpose
- Insulates all hot leads when used as an extension cord.
- Endless extension couplings possible with any banana plug patch cord.

### MATERIALS:

#### Conn: Banana Plug

Material: Spring, One piece heat treated Beryllium Copper, Beryllium Copper 25 per QQ-C-533.

Finish: Nickel plate per QQ-N-290 class 2 (.0002 min.).

Insulation: Polypropylene, molded to plug body and wire. Color matches color of wire.

Operating Temperature: +55° C (+131° F) Max.

Marking: "POMONA ELECTRONICS CALIF."

Wire: 18 AWG; stranding 65 x 36 tinned copper, polyvinyl chloride insulated (.050 wall thickness).

Marking: POMONA 4702-"XX".

#### Conn: In-Line Banana Jack

Material: Brass, H.H. per QQ-B-626, Alloy 360.

Finish: Nickel plate per QQ-N-290. Class 2 (.0002 min.).

Insulation: Polypropylene, molded to jack body and wire. Color matches color of wire.

Operating Temperature: +55° C (+131° F) Max.

Marking: "POMONA ELECTRONICS CALIF."

### RATINGS: Entire Assembly

Operating Temperature: +55° C (+131° F) Max.

Operating Voltage: 5000 W VDC

Current: 15 Amperes Cont.

### ORDERING INFORMATION: Model 4702-XX-\*

XX = Cable Lengths, Standard Lengths: 24" (610mm), 36" (914mm), & 48" (1219mm).

Additional lengths can be quoted upon request.

\*=Color, -0 black, -2 red.

Ordering Example: 4702-48-2 Indicates 48" in length, color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA