



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model 4768 Cable Assembly, Double Banana Plug To Micrograbber® Breakouts

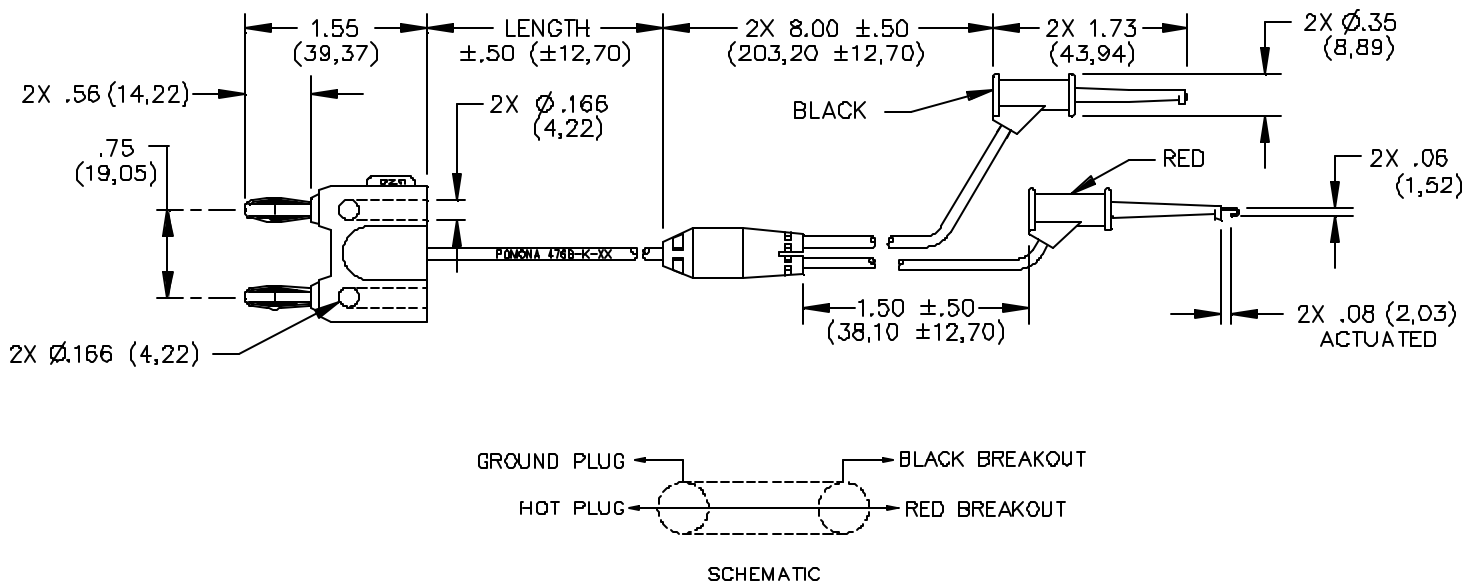

### MATERIALS:

Connector: Double Banana Plug

Body: Brass

Spring: Beryllium Copper

Insulation: Polypropylene

Cable: RG 174/U, 2.54 (.100) O.D.

Marking: "Pomona 4768-K-XX"

Molded Breakout: PVC molded to breakout leads and cable.

Wire: 20 AWG

Connector: Micrograbber® Breakouts

Contact – Gold Plated Beryllium Copper

Spring – Stainless steel

Insulation – Glass filled nylon

### RATING:

Operating Temperature: +50°C (+122°F) Max.

Operating Voltage: 1000 WVDC

**ORDERING INFORMATION:** Model 4768-K-XX XX = Cable length

Std. Lengths: 4" (102), 8" (203), 12" (305), 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1524).

Additional lengths can be quoted upon request.

Ordering Example: 4768-K-24 is a cable with a length of 24".

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA