



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model 4771 Square Pin Receptacle To Banana Plug

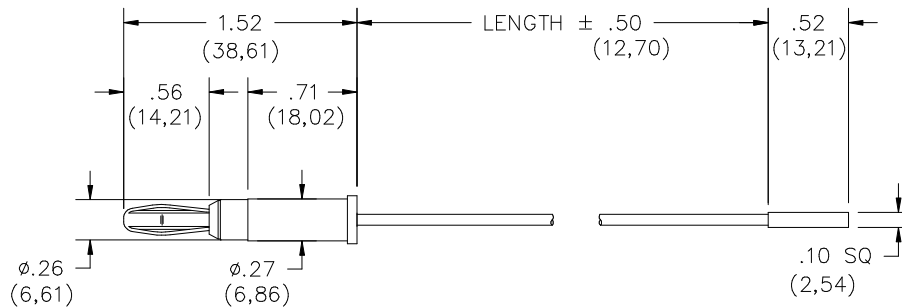

### FEATURES:

- This patch cord is excellent for use as a jumper on circuit cards with 0.6 (.025) sq. pins and equipment with 4.2 (.166) dia. pin jacks.
- Mates to Model numbers 5790, 4521, and 5360.

### MATERIALS:

Conn.: In-Line Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT. Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire.

Color: Matches color of wire

Wire: 22 AWG, stranding 26 x 36 T.C., PVC Insulated, 1.63 (.064) O.D.

Color: See Ordering Information

Marking: "POMONA 4771-XX"

Conn: 0.64 (.025) Square Pin Receptacle

Material: Phosphor bronze.

Finish: Gold plated.

Housing Insulation: Polypropylene

Color: Black.

### RATINGS:

Operating Temperature: +50° C (+122° F) Max

Operating Voltage: 1000 VDC

Current: 3 Amperes

### ORDERING INFORMATION: Model 4771-XX-\*

XX=Cable Lengths, Standard Lengths: 12" (305mm), 24" (610mm), 36" (914mm)

Additional lengths and colors can be quoted upon request.

\*=Color, -0 Black, -2 Red

Ordering Example: 4771-12-2 Indicates 12" in length, color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).  
All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies. Made in USA