



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 4773 Insulated Pin Jack, Miniature With Wrapped Wire Terminal

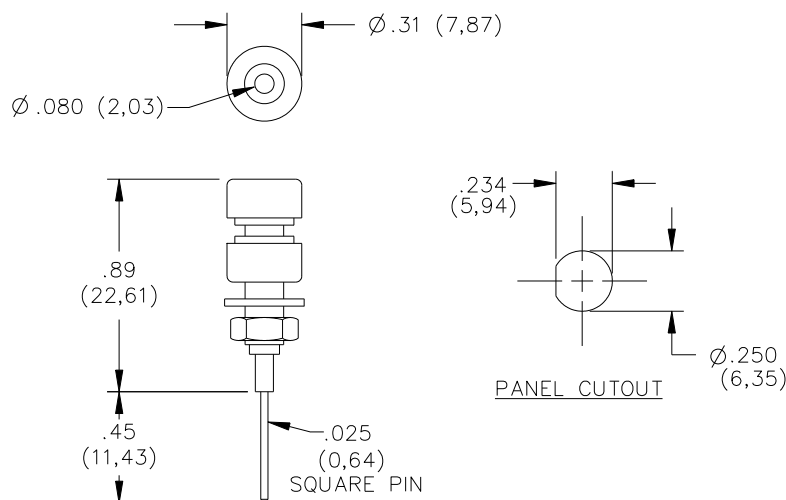

FEATURES:

- Accepts .080 dia. pin
- Max. panel thickness .25.

MATERIALS:

Pin Jack Insulation: Polycarbonate molded to Pin Jack Body.

Panel Insulator: Polycarbonate. Color matches color of Pin Jack insulation.

Lockwasher #8 Internal Tooth: Steel. Finish:

Nickel plated per QQN-290, latest revision, Class 2, 200/300 microinches

Hex Nut #8-32: Brass. Finish: Nickel plated per QQN-290, latest revision, Class 2, 200/300 microinches.

Pin Jack Body: Nickel Plated Brass latest revision, Alloy 360, ½ Hard.

Spring: Gold Plated Beryllium Copper, Beryllco 25 per QQC-533, latest revision, Cond. HT.

Finish: Body – Electroless nickel plated per MIL-C-26074, latest revision, Class 2, 200/300 microinches.

Spring – Gold plated per MIL-G-45204, latest revision Type II, Class 00 over electroless nickel per MIL-C-26074, latest revision, Class 1, 200/300 microinches.

Wrapped Wire Terminal: Gold Plated Phosphor Bronze

Finish: Gold plated per MIL-G-45204, latest revision, Type II, Class 00 over electroless nickel per MIL-C-26074, latest revision, Class 1, 200/300 microinches.

RATINGS:

Operating Temperature: +115°C. (+239°F.) Max.

Operating Voltage: 1500 VDC

Current: 3 Amperes

ORDERING INFORMATION: Model 4773-*

* = Color, Standard Colors: -0 Black, -2 Red, -6 Blue, -9 White

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

W:\pomona\grponly\Datasheet Updates\Updates 2005\d4773_1_02.doc

More drawings available at www.pomonaelectronics.com

Page 1 of 1