



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# UER

## Aluminum Polymer Capacitors

5,000 Hour




### FEATURES

High Temperature – Very Low ESR – High Ripple Current – Stable with Temperature – High Frequency

### APPLICATIONS

DC-DC Converters – Voltage Regulators – Decoupling

<b>Operating Temperature Range</b>		<b>-55°C to +105°C</b>			
<b>Capacitance Tolerance</b>		<b>+20% at 120 Hz, 20°C</b>			
<b>Surge Voltage</b>	<b>WVDC</b>	<b>2.5</b>	<b>4</b>	<b>10</b>	<b>16</b>
	<b>SVDC</b>	1.15 x rated WVDC			
<b>Dissipation Factor 120 Hz, 20°C</b>		<b>10% MAX</b>			
<b>Leakage Current</b>		<b>2 Minutes</b>			
		0.2CV or 280uA, whichever is greater			
<b>Low Temperature Stability Impedance Ratio (100 kHz)</b>	<b>-55°C/ +20°C</b>	≤1.25			
	<b>+105°C/ +20°C</b>	≤1.25			
<b>Load Life</b>		<b>5000 hours at 105°C with rated WVDC applied</b>			
		<b>Capacitance Change</b>	≤20% of initial measured value		
		<b>Dissipation Factor</b>	≤150% of maximum specified value		
		<b>ESR</b>	≤150% of maximum specified value		
		<b>Leakage Current</b>	≤100% of maximum specified value		
<b>Damp Heat test</b>		<b>1000 hours at 60°C with rated voltage applied at 90-95% R.H.</b>			
		<b>Capacitance Change</b>	≤20% of initial measured value		
		<b>Dissipation Factor</b>	≤150% of maximum specified value		
		<b>ESR</b>	≤150% of maximum specified value		
		<b>Leakage Current</b>	≤100% of maximum specified value		
<b>Surge Voltage test</b>		<b>1000 cycles at 105°C with rated surge voltage applied for 30 seconds through a 1kΩ resistor and discharged for 5 minutes and 30 seconds</b>			
		<b>Capacitance Change</b>	≤20% of initial measured value		
		<b>Dissipation Factor</b>	≤150% of maximum specified value		
		<b>ESR</b>	≤150% of maximum specified value		
		<b>Leakage Current</b>	≤100% of maximum specified value		
<b>Ripple Current Multipliers</b>		<b>Frequency (Hz)</b>			
		120Hz≤f<1kHz	1kHz≤f<10kHz	10kHz≤f<100kHz	100kHz≤f<500kHz
		0.05	0.3	0.7	1.0

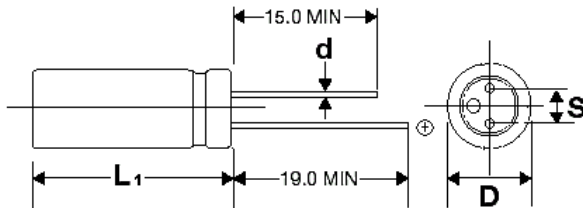

D+0.5	5	6.3	8	10
S±0.5	2	2.5	3.5	5.0
d	0.5 L≤7mm 0.6 (L>7mm)	0.45 L≤6mm 0.6 (L>6mm)	0.6	0.6

L<sub>1</sub>=L+1.0 mm MAX L<11mm  
L<sub>1</sub>=L+1.5 mm MAX, L≥11 mm

**ILLINOIS CAPACITOR**

Your Global Source for World-Class Capacitors

© 2017 Illinois Capacitor

**North America**  
Tel: 847.675.1760  
sales@illcap.com

**Asia**  
Tel: 852.2793 0931  
sales@illcap.com.hk

Feb-17

# UER

+105°C 5000 hour Low ESR

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum ESR (mΩ) 100 kHz, +20°C	Leakage Current (µA)	Maximum RMS Ripple Current (mA) 100 kHz, +105°C	Dims DxL (mm)
100	6.3	107UER6R3MEW	1.66	30	280	2580	6.3x6
100	16	107UER016MED	1.66	24	320	2490	6.3x5
100	16	107UER016MEF	1.66	24	320	2820	6.3x8
100	16	107UER016MES	1.66	24	320	2490	6.3x7
220	16	227UER016MFH	0.75	15	704	4300	8x11.5
270	16	277UER016MFF	0.61	12	864	5000	8x8
270	16	277UER016MFH	0.61	10	864	5000	8x11.5
330	16	337UER016MFH	0.5	10	1056	5000	8x11.5
470	2.5	477UER2R5MEF	0.35	10	280	4500	6.3x8
470	6.3	477UER6R3MEF	0.35	10	592	4500	6.3x8
470	6.3	477UER6R3MFF	0.35	8	592	4000	8x8
470	16	477UER016MFH	0.35	11	1504	5400	8x11.5
470	16	477UER016MGU	0.35	11	1504	5600	10x12.5
560	4	567UER4R0MEF	0.3	7	448	4500	6.3x8
560	6.3	567UER6R3MEF	0.3	8	706	4700	6.3x8
560	6.3	567UER6R3MFF	0.3	8	706	4800	8x8
820	2.5	827UER2R5MEF	0.2	7	410	5600	6.3x8
820	2.5	827UER2R5MFF	0.2	7	410	5600	8x8
1000	16	108UER016MGU	0.17	11	3200	5600	10x12.5
1200	10	128UER010MGU	0.14	8	2400	5000	10x12.5