



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



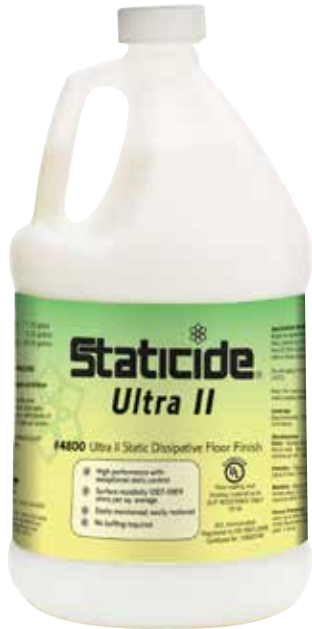

## 4800 Staticide® Ultra II Floor Finish

### Specially Designed for Unique Industrial Surfaces

Whether revitalizing old ESD tiles or protecting a new epoxy floor, ACL's Staticide® Ultra II Floor Finish will help safeguard your costly investment of specialized flooring. This distinctive anti-static blend is compatible with problematic plasticizers found in conductive and dissipative tiles and epoxy and is also suitable for concrete.

This urethane-enhanced formula's high abrasion resistance and durability leave floors static dissipative, glossy, and protected for 12-18 months. Surface resistivity averages  $10^7$ - $10^9$  ohms per square, making Staticide® Ultra II Floor Finish suitable for any environment where static control is required and ESD flooring is installed, such as electronic, medical, and clean room manufacturing facilities. Staticide® Ultra Floor Finish fulfills ANSI/ESD S20.20 guidelines and is suitable for sensitive device manufacturing.

This water-based formula is UL listed for slip resistance, RoHS compliant, biodegradable, non-flammable, and free of formaldehyde, phthalates, alkalis, acids, and ammonia.

**Directions:** Clean floor and apply two thin coats of floor finish with a dedicated rayon mop. Wait one hour between coats. Consult application procedure for details and precise instructions.

**Maintenance:** Sweep or damp mop daily to remove dirt. Periodically clean with a 1:1 dilution of water and floor finish. Apply a thin top coat of floor finish every 4 – 6 weeks. For heavy cleaning, use the 4100 Restorer Cleaner. Consult maintenance procedure for details and precise instructions.

*Product #4800-1; 4 gallons per case*

*Product #4800-5; 5-gallon pail*

*Product #4800-2; 54-gallon drum*

- ❖ **Coverage: 1,500 - 2,000 square feet per gallon**
- ❖ **Non-toxic; biodegradable**
- ❖ **Solids: 21 ± 5%**
- ❖ **Strip cycle: 12-18 months**
- ❖ **Suitable to use on ESD tile, epoxy, and concrete floors**
- ❖ **Surface resistivity:  $10^7$  –  $10^9$  ohms per square (average)**
- ❖ **Low V.O.C.**
- ❖ **Water-based acrylic**

