



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Optically Isolated RS-422/485 Repeaters


4850P, 4850PB

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com

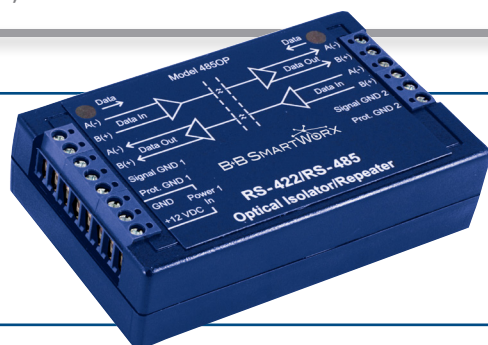

PRODUCT FEATURES

- 2 KV isolation
- Add up to 32 nodes to RS-485 network
- RS-422 2-wire, RS-485 2 or 4-wire
- Modbus
- UL Recognized (Model 4850P only)

Model 4850P is an optically isolated RS-422/485 signal repeater. In addition to 2KV isolation on the data lines, it can be used to extend RS-422/485 circuits an additional 1.2 km (4,000 ft.), thereby doubling the range. An added benefit is the ability to add another 32 nodes to an RS-485 network and join 2 and 4 wire systems.

The compact design fits almost anywhere. Terminal blocks allow easy installation. Wiring schematic on the label eliminates guesswork. A 12 VDC power supply is required.

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION	POWER SUPPLY
4850P	RS-422/485 Fiber Optic Isolated Repeater	USA (included)
4850PB	RS-422/485 Fiber Optic Isolated Repeater	EU or UK (sold separately)

ACCESSORIES

PS1EU-1000 - 220-240 VAC to 12 VDC power supply, jack, Euro CEE7/7 plug

PS1UK-1000 - 220-240 VAC to 12 VDC power supply, jack, UK BS-1363 plug

485HESP - RS-485 surge protector

485PS4 - 12VDC @ 500 mA, wall power supply, tinned stripped leads

SPECIFICATIONS

SERIAL PROTOCOLS	
	RS-422 4-wire
	RS-485 2-wire
	RS-485 4-wire
ISOLATION	
Lines Protected	Data lines
Method	Optical
Rating	2000 V
SURGE SUPPRESSION	
Lines Protected	Data lines
Method	TVS
Rating	6.5V bi-directional 600W peak power dissipation
INDUSTRIAL BUS	
	Modbus ASCII/RTU
POWER	
Connector	Terminal block
Voltage	10 to 14 VDC
Power Consumption	1.0 W
Source	Included wall transformer or other 10 to 14 VDC source
POWER SUPPLY	
Input Voltage	120 VAC (USA); 220-240 VAC (EU, UK)
Output Voltage	12 VDC
Output Connection	USA: Stripped and tinned leads EU: UK BS-1363 plug, jack UK: Euro CEE7/7 plug, jack
TERMINAL BLOCKS	
Wire Size	22 to 14 AWG
Torque	0.5 Nm
LED INDICATORS	
2 x DATA (RED)	Flashes when data received
ENCLOSURE	
Material	Plastic
IP Rating	30
Dimensions	9.7 x 6.1 x 2.5 cm (3.8 x 2.4 x 1.0 in)
Mounting	In line
ENVIRONMENTAL	
Operating Temperature	0 to 55 °C (32 to 131 °F)
Operating Humidity	0 to 95% non-condensing
MTBF	453103 hours
MTBF Calculation Method	Parts Count Reliability Prediction
AGENCY APPROVALS	
	CE, FCC
	cULus Recognized, File E222870 (Model 4850P only)
	Declaration of Conformity available for download at www.bb-elec.com

All product specifications are subject to change without notice.
4850P&4850PB_1916ds

ADVANTECH

B+B SMARTWORX

orders@advantech-bb.com
support@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445