

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



BAG, DISSIPATIVE PINK POLY

Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 5

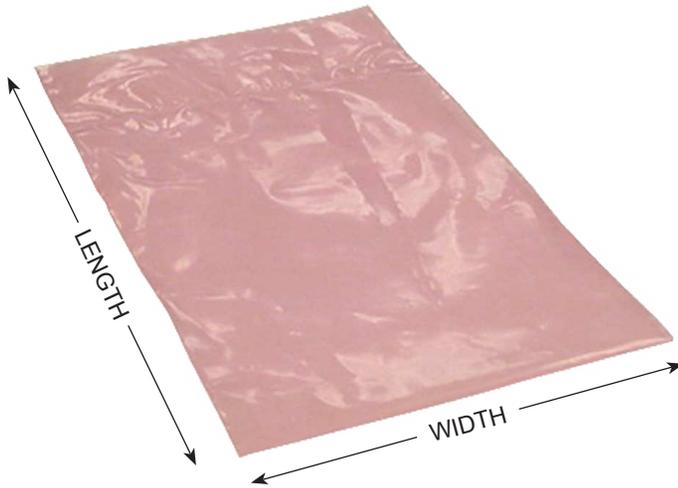

Specifications:

Electrical Properties

Electrical Properties	Typical Value
Static Decay:	< 1.0 sec.
Surface Resistance:	1 x 10 ⁴ to < 1 x 10 ¹¹ ohms
Polycarbonate Haze:	NE
Corrosivity Observations:	NE

Test Procedures/Method

ASTM 101 Method 4046
ANSI/ESD STM11.11
72 hr contact
MIL-STD-3010, M3005

Physical Properties

Material Thickness:	4.0mils (0.004", 0.1016mm), +/- 10%
Melt Index:	0.050 gm/ 10 min
Density:	0.923 gm/cc
Dart Impact:	230 gms
Coefficient of Friction:	MD 24,000 psi
1% Secant Modulus (Stiffness):	MD 25,000 psi

ASTM D-1283
ASTM D-1505
ASTM D-1709
ASTM D-1894 (unmodified film)
ASTM D-882

Per ANSI/ESD S541 section 6.1 Inside an ESD Protected Area "Packaging used within an EPA (that satisfies the minimum requirements of ANSI/ESD S20.20) shall be:

- Low charge generation.
- Dissipative or conductive materials for intimate contact."

RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2013-12-16 are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Protektive Pak [Limited Warranty at ProtektivePak.com](#).

Item No.	Size (in.) W x L	Item No.	Size (in.) W x L
49100	2 x 3	49110	8 x 12
49101	3 x 4	49111	10 x 12
49102	3 x 5	49112	10 x 14
49103	4 x 6	49113	10 x 20
49104	5 x 7	49114	12 x 16
49105	5 x 8	49115	14 x 16
49106	6 x 8	49116	15 x 18
49107	6 x 9	49117	16 x 20
49108	6 x 10	49118	18 x 20
49109	8 x 10	49119	18 x 24
Packaged 100 per package			



Made in the United States of America

Specifications are subject to change without notice.

TRANSPARENT STATIC DISSIPATIVE (PINK POLY)

PROTEKTIVE PAK
 13520 MONTE VISTA AVENUE, CHINO, CA 91710
 PHONE (909) 627-2578
[ProtektivePak.com](#)

DRAWING NUMBER
 49100

DATE
 March 2015

Dimensional tolerances unless otherwise specified:
L: +/- 0.250" / W: +/- 0.250"

PROTEKTIVE PAK