



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SERIES

4922R
4922



Surface Mount High Current Power Inductors

DASH NUMBER*
0 AMPS DC INDUCTANCE
±15% (µH @ 10 kHz)
DCR (OHMS) MAXIMUM
RATED DC CURRENT
(Amps) MAXIMUM
INDUCTANCE (µH) MINIMUM
@ Rated DC Current

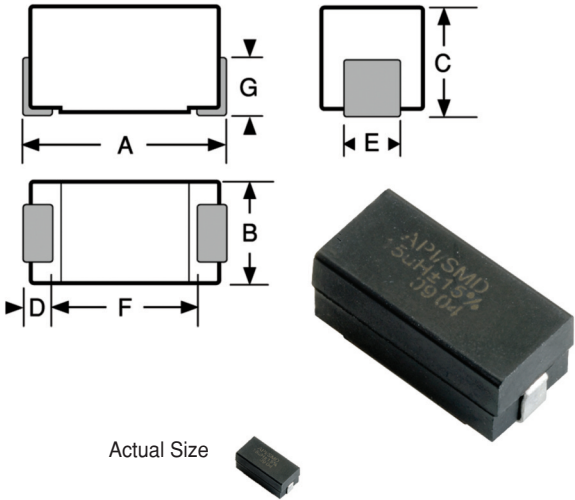

Mechanical Configuration Units are encapsulated in a Surface Mount package, using an epoxy molded case. Leads are pre-tinned. A high resistivity ferrite core allows for high inductance with low DC resistance.

Physical Parameters

	Inches	Millimeters
A	0.490 to 0.520	12.44 to 13.21
B	0.230 to 0.250	5.84 to 6.35
C	0.210 to 0.230	5.33 to 5.84
D	0.050 Min.	1.27 Min.
E	0.055 to 0.075	1.40 to 1.91
F	0.330 (Ref. only)	8.38 (Ref. only)
G	0.120 (Ref. only)	3.04 (Ref. only)

Operating Temperature Range -55°C to +125°C

Current Rating at 85°C Ambient 40°C Rise

Maximum Power Dissipation at 85°C 0.55 Watts

Inductance

Measured at 1 VAC open circuit with no DC current.

Incremental Current The current at which the inductance will be decreased by a maximum of 5% from its initial zero DC value.

Weight (Grams Max.) 1.5

Marking API/SMD; inductance with units and tolerance; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 4922-01L
API/SMD
1.0uH±15%
0918A

Packaging Tape & reel (24mm): 13" reel, 800 pieces max.; 7" reel not available

Made In the U.S.A.

SERIES 4922 FERRITE CORE				
-221L	0.22	0.0080	7.00	7.00
-271L	0.27	0.0085	6.75	6.75
-331L	0.33	0.0090	6.50	6.50
-391L	0.39	0.0095	6.25	6.25
-471L	0.47	0.0100	6.00	6.00
-561L	0.56	0.0105	5.80	5.80
-681L	0.68	0.0110	5.70	5.70
-821L	0.82	0.0120	5.60	5.60
-01L	1.00	0.013	5.50	5.50
-02L	1.20	0.018	4.69	4.69
-03L	1.50	0.020	4.45	4.45
-04L	1.80	0.021	4.34	4.34
-05L	2.20	0.029	3.70	3.70
-06L	2.70	0.034	3.41	3.41
-07L	3.30	0.038	3.23	3.23
-08L	3.90	0.042	3.07	3.07
-09L	4.70	0.047	2.90	2.90
-10L	5.60	0.051	2.79	2.79
-11L	6.80	0.058	2.61	2.61
-12L	8.20	0.063	2.51	2.51
-13L	10.0	0.071	2.36	2.36
-14L	12.0	0.079	2.24	2.24
-15L	15.0	0.089	2.11	2.11
-16L	18.0	0.119	1.82	1.82
-17L	22.0	0.152	1.61	1.61
-18L	27.0	0.179	1.48	1.48
-19L	33.0	0.222	1.33	1.33
-20L	39.0	0.315	1.12	1.12
-21L	47.0	0.362	1.04	1.04
-22L	56.0	0.397	1.00	1.00
-23L	68.0	0.418	0.97	0.97
-24L	82.0	0.604	0.81	0.81
-25L	100	0.672	0.76	0.76
-26L	120	0.735	0.73	0.73
-27L	150	0.998	0.63	0.63
-28L	180	1.370	0.53	0.53
-29L	220	1.580	0.50	0.50
-30L	270	1.770	0.47	0.47
-31L	330	2.510	0.39	0.39
-32L	390	2.730	0.38	0.38
-33L	470	3.250	0.35	0.35
-34L	560	3.750	0.33	0.33
-35L	680	4.310	0.30	0.30
-36L	820	6.040	0.26	0.26
-37L	1000	6.900	0.24	0.24
-38L	1200	10.00	0.200	0.200
-39L	1500	12.50	0.178	0.178
-40L	1800	16.00	0.157	0.157
-41L	2200	20.00	0.141	0.141
-42L	2700	23.00	0.131	0.131
-43L	3300	25.00	0.126	0.126
-44L	3900	33.00	0.110	0.110
-45L	4700	37.00	0.103	0.103
-46L	5600	40.00	0.100	0.100
-47L	6800	62.00	0.080	0.080
-48L	8200	66.00	0.077	0.077
-49L	10000	74.00	0.071	0.071
-50L	12000	93.00	0.065	0.065
-51L	15000	105.0	0.061	0.061
-52L	18000	143.0	0.052	0.052
-53L	22000	160.0	0.050	0.050

Optional Tolerances: Values < 10µH: K = 10% J = 5%
Values ≥ 10µH: K = 10% J = 5% H = 3%

*Complete part # must include series # PLUS the dash #

For surface finish information,
refer to www.delevanfinishes.com