



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



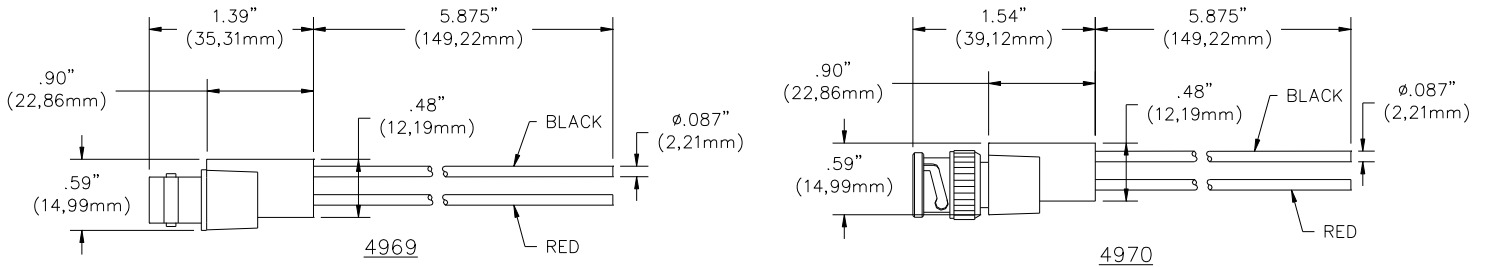

FEATURES:

- Breakout quickly converts a BNC cable to flying leads
- Lead ends can be attached to terminal strips or customized
- BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance
- BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life
- Black lead is connected to BNC shell, red lead to BNC center contact

MATERIALS:

BNC: Nickel plated brass

Center Contact: Gold plated Beryllium Copper

Wire: 20 AWG, PVC

Marking: "POMONA 4969" or "POMONA 4970"

RATINGS:

Operating Voltage: 500 VRMS

Operating Temperature: +55°C (+131°F) Max.

ORDERING INFORMATION: Model 4969 or 4970

BNC breakouts with banana plugs, spade lugs, alligators and Minigrabber test clips are also available

*Custom lengths are available, contact Pomona Technical support: 800-241-2060 (Technicalsupport@pomonatest.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.