

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# Illumec™ 4F

Illuminated switches • slip-on cap retention system • integrated chip-LEDs



## DISTINCTIVE FEATURES

10 x 10 mm ; h=10.4 mm

Illumination with integrated chip-LEDs

Single or bi-color illumination

Momentary NO

Simple slip-on cap retention system



## ENVIRONMENTAL SPECIFICATIONS

- Switch sealing : IP67 according to IEC 60529
- Working and storage temperature : -30°C/+85°C
- Soldering :
  - through-hole : IEC 68-2-20 8
  - surface mount : JEDEC J-STD-020C



## ELECTRICAL SPECIFICATIONS

- Recommended load :
  - Gold contacts : 0.5µ-50mA 24VDC
  - Silver contacts : 0.5-50mA 24VDC
- Contact resistance : <30mΩ - typically 10mΩ
- Insulation resistance : >10MΩ
- Contact bounce : <2mS - typically 0.5mS



## MECHANICAL SPECIFICATIONS

- Standard actuation force : 3.5N
- Max. actuation force : 100N for 10 sec
- Travel : 1 mm
- Lifetime : >10,000,000 cycles

The company reserves the right to change specifications without notice.



## MATERIALS

- Housing : PPS UL94V0
- Actuator : PPS UL94V0
- Sealing : Silicone rubber
- Contacts spring : Stainless steel
  - Silver : +3µAg
  - Gold : +1µAu
- Fixed contacts :
  - Silver : SnCu + 2µNI + 3µAg
  - Gold : SnCu + 2µNI + 1µAu
- Terminals : SnCu + 2µNI + 3µSn100

All tolerance if not otherwise specified ±0.2mm.

# Illumec™ 4F

Illuminated switches • slip-on cap retention system • integrated chip-LEDs

## 4FSH9XX





- SMD
- NO
- Single or bi-color LEDs

## 4FTH9XX



- TH
- NO
- Single or bi-color LEDs



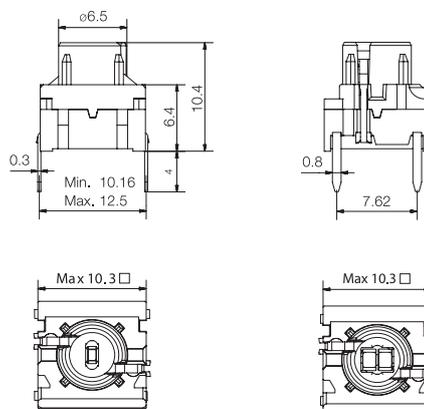
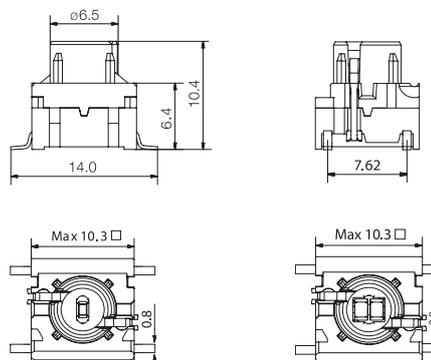


All tolerances unless otherwise noted : ±0.2 mm

## PCB LAYOUT & CIRCUIT DIAGRAM

### SINGLE LED


### BI-COLOR - 2 LEDs



Illuminated switches • slip-on cap retention system • integrated chip-LEDs



## BUILD YOUR PART NUMBER

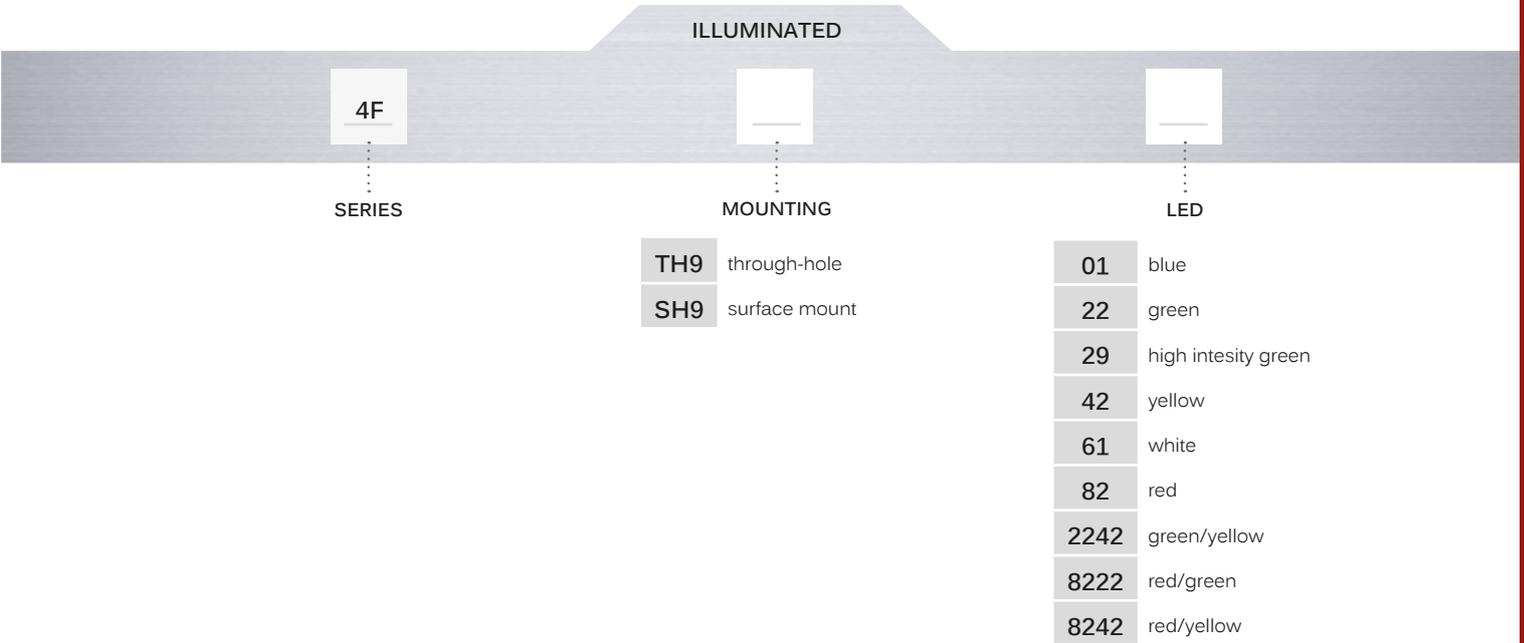

## ABOUT THIS SERIES

**Notice :** Refer to [www.apem.com](http://www.apem.com) for further information.

**Accessories :** See the website for 4F cap and bezel options

# Illumec™ 4F

Illuminated switches • slip-on cap retention system • integrated chip-LEDs



## TAPE & REEL

Tape and reel is available for the parts listed and has the following specifications


- Reel diameter: Ø330 mm
- Tape width: 24 mm
- Pitch: see list
- Tape and reel material : antistatic or better
- Quantity per reel : see list

PART NO.	ORDERING CODE	PITCH	QUANTITY PER REEL
4FSH901	4FSH901R	20	250
4FSH922	4FSH922R	20	250
4FSH942	4FSH942R	20	250
4FSH961	4FSH961R	20	250
4FSH982	4FSH982R	20	250
4FSH92242	4FSH92242R	20	250
4FSH98222	4FSH98222R	20	250
4FSH98242	4FSH98242R	20	250




## MOUNTING

SPACE REQUIREMENT - MATRIX MOUNTING



through-hole (TH)

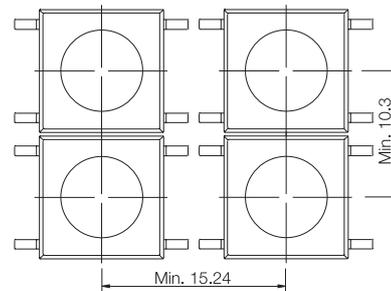

surface mount (SMD)

## LED COMPONENT SPECIFICATIONS

Color		Blue	Green	Yellow	White	Red	High Intensity Green
Color Codes		01	22	42	61	82	29
ABSOLUTE MAXIMUM RATINGS (Ta=25°C)							
Power	mW	110	75	60	48	65	102.5
Current forward	mA	25	30	25	15	25	25
Forward peak current	mA	100	80	60	100	100	150
Voltage reverse	V	5	5	5	NA	12	5
Operating temperature	°C	-40/+85	-55/+85	-40/+85	-40/+85	-30/+85	-40/+85
Storage temperature	°C	-40/+85	-55/+85	-40/+90	-40/+85	-40/+85	-40/+85
Soldering temperature	°C	5	245 for max. 10 sec				
ELECTRICAL-OPTICAL CHARACTERISTICS (Ta=25°C)							
Voltage forward	Typ. V	3.3	2	1.75**	2.85	2	3.3
	Max. V	3.7	2.4	2.35	3.1	2.5	4.1
Current reverse (VR=5V)	Max. µA	50	100	10	NA	100	50
Wave length	nm	468	571	591	NA	633	525
Spread	△nm	25	NA	15	NA	16	30
Spread angle	degree	120	130	120	150	160	60
Luminous Intensity	Min. mcd	28.5	18	28.5	71	28	500
	Typ. mcd	72*	35	72*	224*	180*	1000
Optical intensity	Lm/w	NA	NA	NA	36	7	NA

\*/F=20mA, \*\*Pulse width 1ms Duty cycle 1:5, \*\*\*/F=50mA, \*\*\*\*Luminous Flux l/m