



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



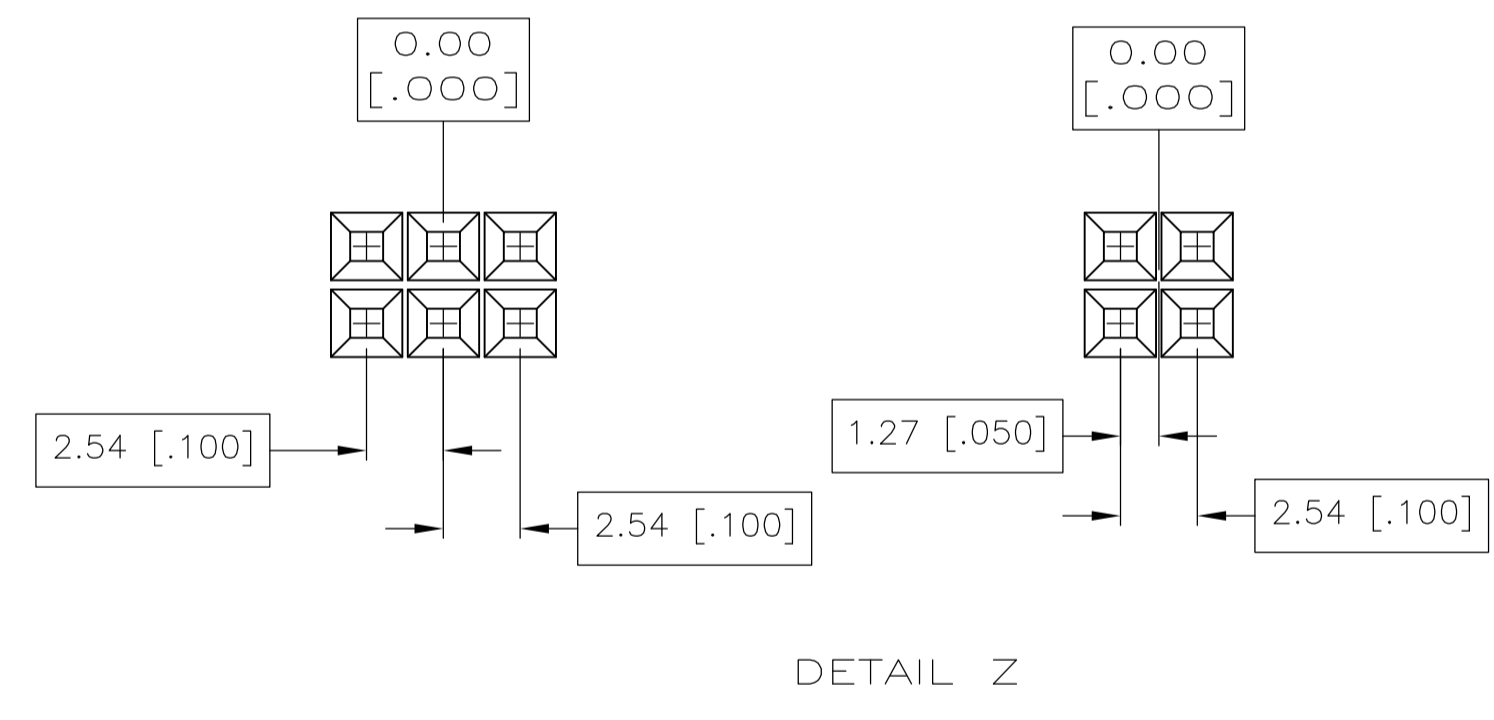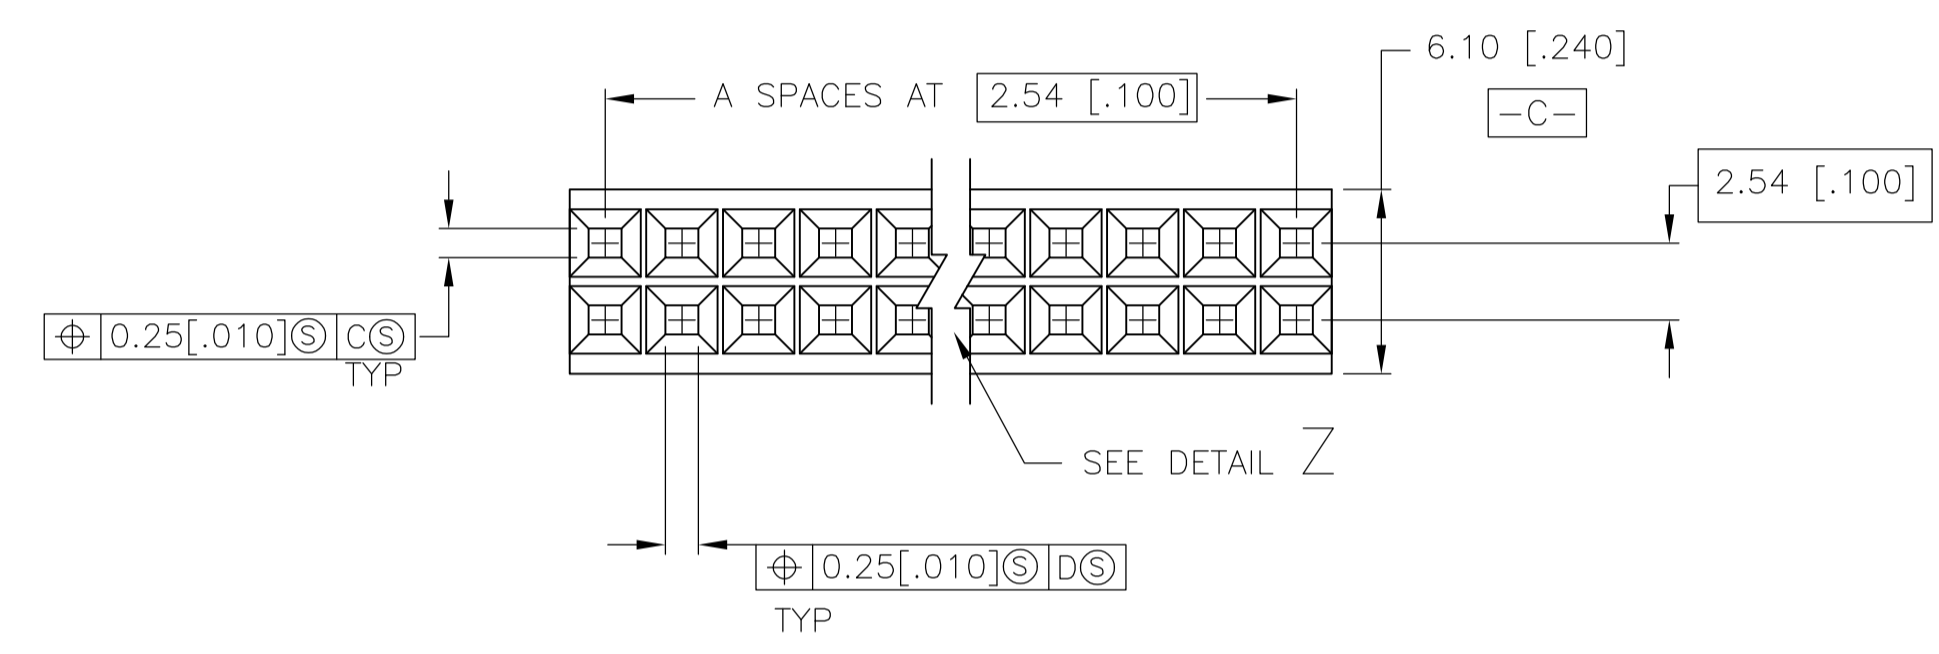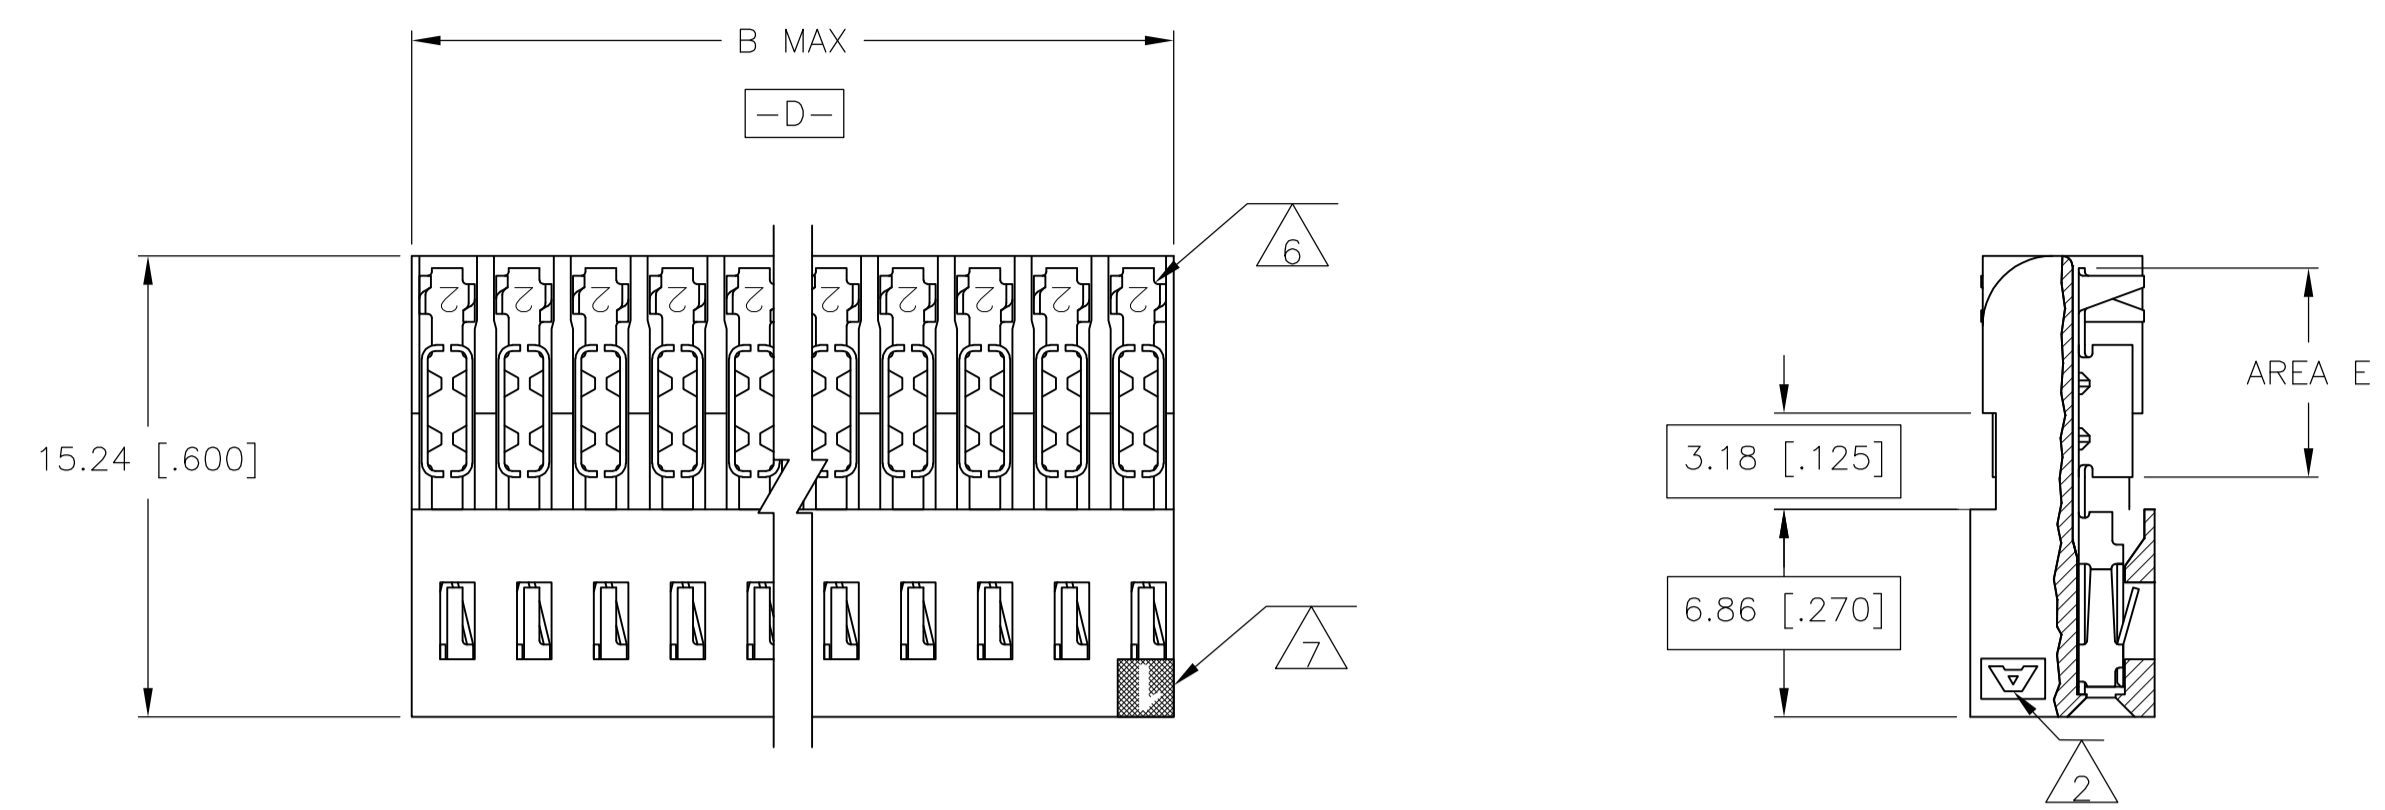

- 1 MATERIAL-HOUSING: PBT, UL94V-0 RATED, COLOR- BLACK  
CONTACTS: COPPER ALLOY PER ASTM B103
- 2 AMP TRADEMARK (EITHER SIDE).
- 3 0.00076[.000030] MIN. GOLD IN CONTACT AREA, 0.00127-0.00254[.000050-.000100] TIN-LEAD IN AREA E, ALL OVER 0.00127[.000050] MIN. NICKEL.
- 4 0.00076[.000030] MIN. GOLD IN CONTACT AREA, 0.00127 - 0.00254 [.000050 - .000100] TIN IN AREA E, ALL OVER 0.00127[.000050] MIN. NICKEL.
- 5. USE WITH 22-26 AWG WIRE SIZE, 1.27[.050] MAX INSULATION DIA., 0.381[.015] MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "2" LOCATED IN THIS AREA.
- 7 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 8 OBSOLETE PART NUMBER.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

81.28 [3.200]	31	64	4	8-102398-0	
76.20 [3.000]	29	60	4	7-102398-8	
68.58 [2.700]	26	54	4	7-102398-5	OBSOLETE 9
63.50 [2.500]	24	50	4	7-102398-3	
50.80 [2.000]	19	40	4	6-102398-8	
43.18 [1.700]	16	34	4	6-102398-5	
40.64 [1.600]	15	32	4	6-102398-4	OBSOLETE 9
38.10 [1.500]	14	30	4	6-102398-3	
35.56 [1.400]	13	28	4	6-102398-2	
33.02 [1.300]	12	26	4	6-102398-1	
30.48 [1.200]	11	24	4	6-102398-0	
27.94 [1.100]	10	22	4	5-102398-9	OBSOLETE 9
25.40 [1.000]	9	20	4	5-102398-8	
22.86 [.900]	8	18	4	5-102398-7	
20.32 [.800]	7	16	4	5-102398-6	
17.78 [.700]	6	14	4	5-102398-5	
15.24 [.600]	5	12	4	5-102398-4	
12.70 [.500]	4	10	4	5-102398-3	
10.16 [.400]	3	8	4	5-102398-2	
7.62 [.300]	2	6	4	5-102398-1	
B	A	NO OF POSN	FINISH	PART NO.	

	5.08 [.200]	1	4	3	8	3-102398-5
SUPERSEDED BY 1-102398-8	91.44 [3.600]	35	72	3		3-102398-4
SUPERSEDED BY 1-102398-3,-8	88.90 [3.500]	34	70	3		3-102398-3
SUPERSEDED BY 1-102398-5	86.36 [3.400]	33	68	3		3-102398-2
SUPERSEDED BY 1-102398-5	83.82 [3.300]	32	66	3		3-102398-1
	81.28 [3.200]	31	64	3		3-102398-0
SUPERSEDED BY 1-102398-3	78.74 [3.100]	30	62	3		2-102398-9
	76.20 [3.000]	29	60	3		2-102398-8
SUPERSEDED BY 1-102398-2,-3	73.66 [2.900]	28	58	3		2-102398-7
SUPERSEDED BY 1-102398-2	71.12 [2.800]	27	56	3		2-102398-6
9	68.58 [2.700]	26	54	3		2-102398-5
SUPERSEDED BY 1-102398-1	66.04 [2.600]	25	52	3		2-102398-4
	63.50 [2.500]	24	50	3		2-102398-3
SUPERSEDED BY 1-102398-0	60.96 [2.400]	23	48	3		2-102398-2
SUPERSEDED BY 1-102398-0	58.42 [2.300]	22	46	3		2-102398-1
SUPERSEDED	55.88 [2.200]	21	44	3		2-102398-0
SUPERSEDED BY 102398-8	53.34 [2.100]	20	42	3		1-102398-9
	50.80 [2.000]	19	40	3		1-102398-8
SUPERSEDED BY 102398-8,-7	48.26 [1.900]	18	38	3		1-102398-7
SUPERSEDED BY 102398-5,-7	45.72 [1.800]	17	36	3		1-102398-6
	43.18 [1.700]	16	34	3		1-102398-5
9	40.64 [1.600]	15	32	3		1-102398-4
	38.10 [1.500]	14	30	3		1-102398-3
	35.56 [1.400]	13	28	3		1-102398-2
	33.02 [1.300]	12	26	3		1-102398-1
	30.48 [1.200]	11	24	3		1-102398-0
9	27.94 [1.100]	10	22	3		1-102398-9
	25.40 [1.000]	9	20	3		102398-8
	22.86 [.900]	8	18	3		102398-7
	20.32 [.800]	7	16	3		102398-6
	17.78 [.700]	6	14	3		102398-5
	15.24 [.600]	5	12	3		102398-4
	12.70 [.500]	4	10	3		102398-3
	10.16 [.400]	3	8	3		102398-2
	7.62 [.300]	2	6	3		102398-1
	B	A	NO OF POSN	FINISH		PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± 0.13[.005] 3. PLC ± - 4. PLC ± - ANGLES ± -	DIN R BROWN 07MAY03 CHK J MOSIER 07MAY03 APVD J MOSIER 07MAY03	NAME
MATERIAL 1	FINISH SEE TABLE	WEIGHT	SIZE A1
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1

STE TE Connectivity

AMPMODU MT, RECEPTACLE ASSEMBLY  
STANDARD-PRESSURE CONTACTS  
FOR 22-26 AWG WIRE SIZE

108-25015  
114-25032

00779 102398