



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LOC		DIST		REVISIONS			
AD	00	F	LTR	DESCRIPTION	DATE	DMN	APVD
S2	REVISED PER ECO-11-004587				11MAR11	RK	HMR

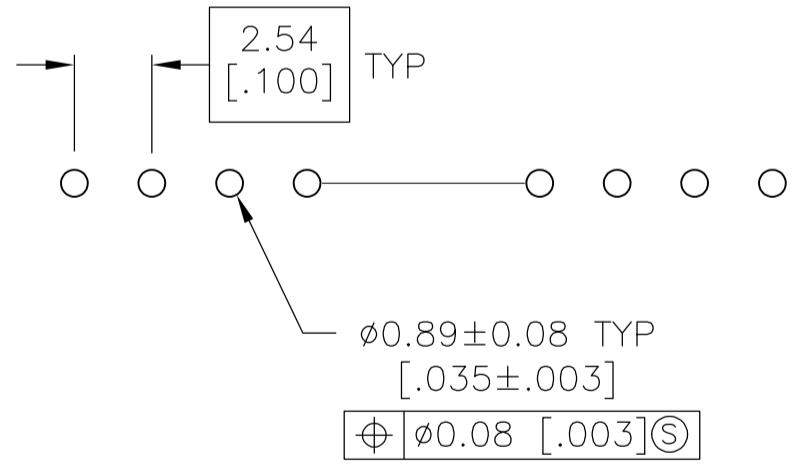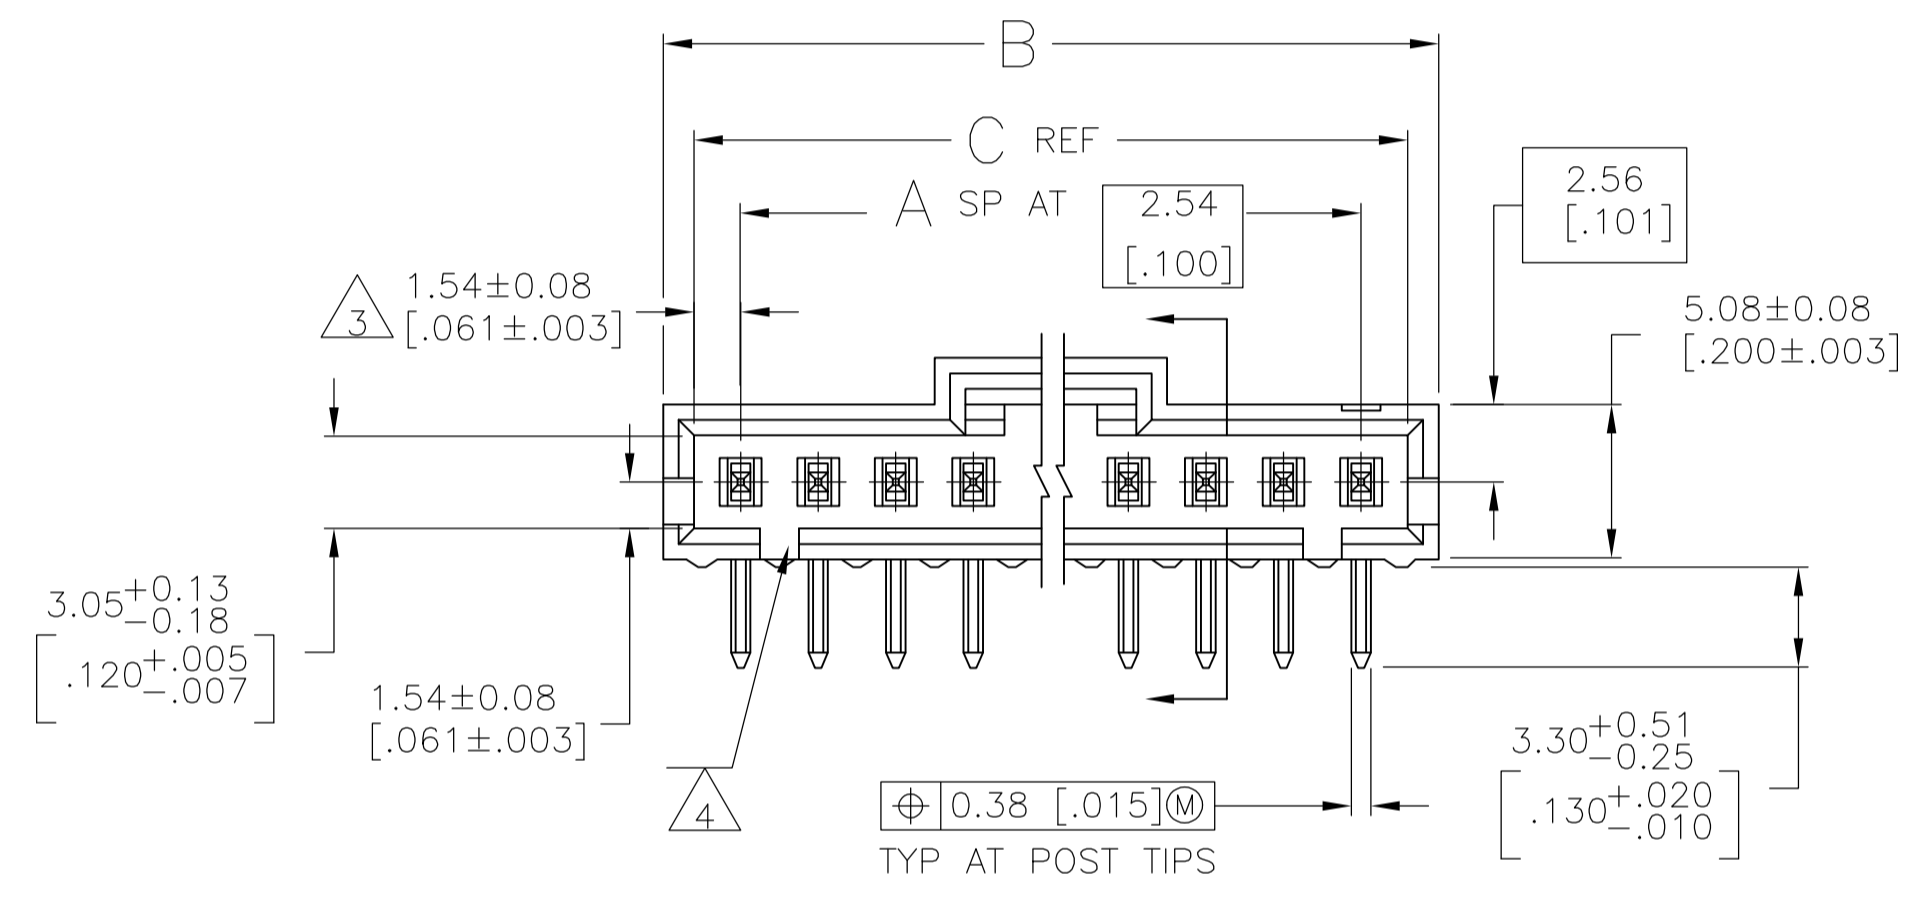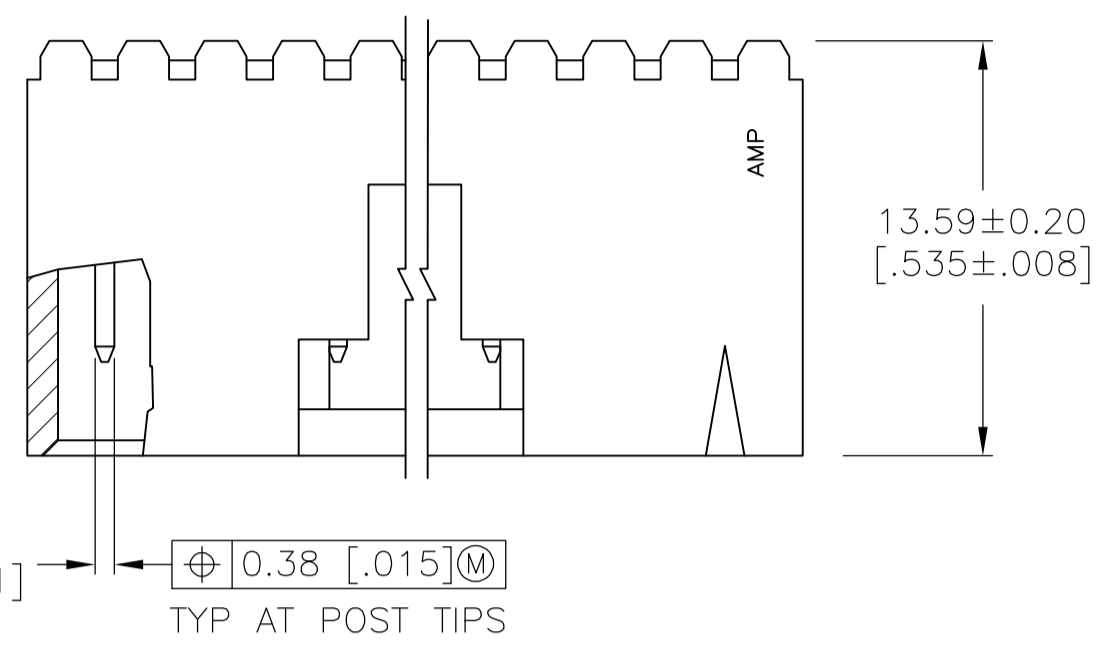

RECOMMENDED HOLE LAYOUT

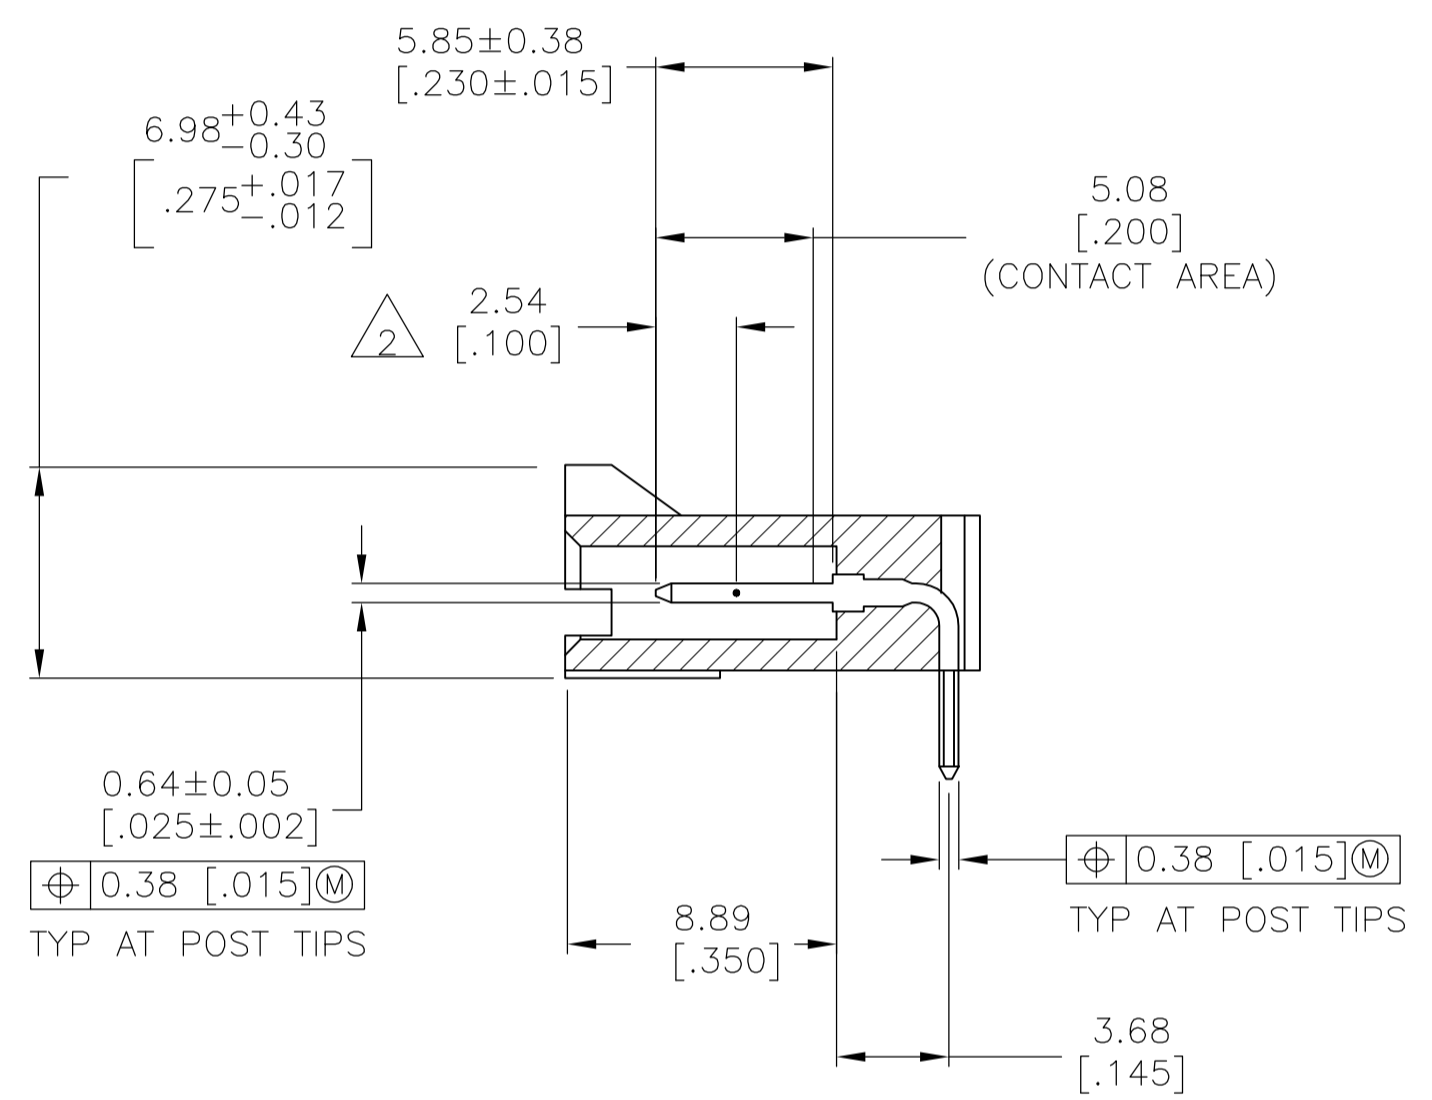

- 1 .00038 [.000015] GOLD IN THE CONTACT AREA, .00254 [.000100] MATTE TIN-LEAD ON THE REMAINDER OF CONTACT, ALL OVER .00127 [.000050] NICKEL.
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 4 ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS. ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- 5 .00038 [.000015] GOLD IN THE CONTACT AREA, .00254 [.000100] MATTE TIN ON THE REMAINDER OF CONTACT, ALL OVER .00127 [.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	DATE	DMN	APVD	PART NO.	
1		64.01 [2.520]	66.04 [2.600]	24	25	2-103635-4
1		61.47 [2.420]	63.50 [2.500]	23	24	2-103635-3
1		58.93 [2.320]	60.96 [2.400]	22	23	2-103635-2
1		56.39 [2.220]	58.42 [2.300]	21	22	2-103635-1
1		53.85 [2.120]	55.88 [2.200]	20	21	2-103635-0
1		51.31 [2.020]	53.34 [2.100]	19	20	1-103635-9
1		48.77 [1.920]	50.80 [2.000]	18	19	1-103635-8
1		46.23 [1.820]	48.26 [1.900]	17	18	1-103635-7
1		43.69 [1.720]	45.72 [1.800]	16	17	1-103635-6
1		41.15 [1.620]	43.18 [1.700]	15	16	1-103635-5
1		38.61 [1.520]	40.64 [1.600]	14	15	1-103635-4
1		36.07 [1.420]	38.10 [1.500]	13	14	1-103635-3
1		33.53 [1.320]	35.56 [1.400]	12	13	1-103635-2
1		30.99 [1.220]	33.02 [1.300]	11	12	1-103635-1
1		28.45 [1.120]	30.48 [1.200]	10	11	1-103635-0
1		25.91 [1.020]	27.94 [1.100]	9	10	103635-9
1		23.37 [.920]	25.40 [1.000]	8	9	103635-8
1		20.83 [.820]	22.86 [.900]	7	8	103635-7
1		18.29 [.720]	20.32 [.800]	6	7	103635-6
1		15.75 [.620]	17.78 [.700]	5	6	103635-5
1		13.21 [.520]	15.24 [.600]	4	5	103635-4
1		10.67 [.420]	12.70 [.500]	3	4	103635-3
1		8.13 [.320]	10.16 [.400]	2	3	103635-2
1		5.59 [.220]	7.62 [.300]	1	2	103635-1
PLATING	C	B	A	NO. OF POSN	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DTN: S. SHUEY 5-3-91
 CHK: L. CASTAGNA 27-3-91
 APVD: L. CASTAGNA 27-3-91

TE Connectivity

HDR ASSY, RTANG, SINGLE ROW
 2.54[.100] C/L, 0.64[.025] SQ POST,
 WITH PLZN & LATCHING, AMPMODU MTE

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026


SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 103635

RESTRICTED TO: CUSTOMER DRAWING

SCALE: 4:1 SHEET 1 OF 2 REV: S2

LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION	DATE	DNW	APVD		
-	-	SEE SHEET 1	-	-	-	-	-

	△6	△5	64.01 [2.520]	66.04 [2.600]	24	25	7-103635-4
	△6	△5	61.47 [2.420]	63.50 [2.500]	23	24	7-103635-3
△7	△6	△5	58.93 [2.320]	60.96 [2.400]	22	23	7-103635-2
	△6	△5	56.39 [2.220]	58.42 [2.300]	21	22	7-103635-1
△7	△6	△5	53.85 [2.120]	55.88 [2.200]	20	21	7-103635-0
	△6	△5	51.31 [2.020]	53.34 [2.100]	19	20	6-103635-9
△7	△6	△5	48.77 [1.920]	50.80 [2.000]	18	19	6-103635-8
	△6	△5	46.23 [1.820]	48.26 [1.900]	17	18	6-103635-7
	△6	△5	43.69 [1.720]	45.72 [1.800]	16	17	6-103635-6
	△6	△5	41.15 [1.620]	43.18 [1.700]	15	16	6-103635-5
	△6	△5	38.61 [1.520]	40.64 [1.600]	14	15	6-103635-4
	△6	△5	36.07 [1.420]	38.10 [1.500]	13	14	6-103635-3
	△6	△5	33.53 [1.320]	35.56 [1.400]	12	13	6-103635-2
	△6	△5	30.99 [1.220]	33.02 [1.300]	11	12	6-103635-1
	△6	△5	28.45 [1.120]	30.48 [1.200]	10	11	6-103635-0
	△6	△5	25.91 [1.020]	27.94 [1.100]	9	10	5-103635-9
	△6	△5	23.37 [.920]	25.40 [1.000]	8	9	5-103635-8
	△6	△5	20.83 [.820]	22.86 [.900]	7	8	5-103635-7
	△6	△5	18.29 [.720]	20.32 [.800]	6	7	5-103635-6
	△6	△5	15.75 [.620]	17.78 [.700]	5	6	5-103635-5
	△6	△5	13.21 [.520]	15.24 [.600]	4	5	5-103635-4
	△6	△5	10.67 [.420]	12.70 [.500]	3	4	5-103635-3
	△6	△5	8.13 [.320]	10.16 [.400]	2	3	5-103635-2
	△6	△5	5.59 [.220]	7.62 [.300]	1	2	5-103635-1
	REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SHUEY 5-3-91 CHK L. CASTAGNA 27-3-91 APVD L. CASTAGNA 27-3-91	 TE Connectivity
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PL ± - 1 PL ± - 2 PL ± - 3 PL ± - 4 PL ± - ANGLES ± -	PRODUCT SPEC 108-25034 APPLICATION SPEC 114-25026	NAME HDR ASSY, RTANG, SINGLE ROW 2.54[.100] C/L, 0.64[.025] SQ POST, WITH PLZN & LATCHING, AMPMODU MTE
MATERIAL: HOLDING: PLATING: COLOR: COATING: FINISH:	SEE TABLE	WEIGHT: - CUSTOMER DRAWING	SIZE: A1 CAGE CODE: 00779 DRAWING NO: 103635 RESTRICTED TO: - SCALE: 1:1 SHEET 2 OF 2 REV 52