



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- ③ 0.00254-0.00504 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
  - ④ HOUSING: LCP, COLOR-BLACK. POSTS: PHOSPHOR BRONZE.
  - ⑤ 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
  - ⑥ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

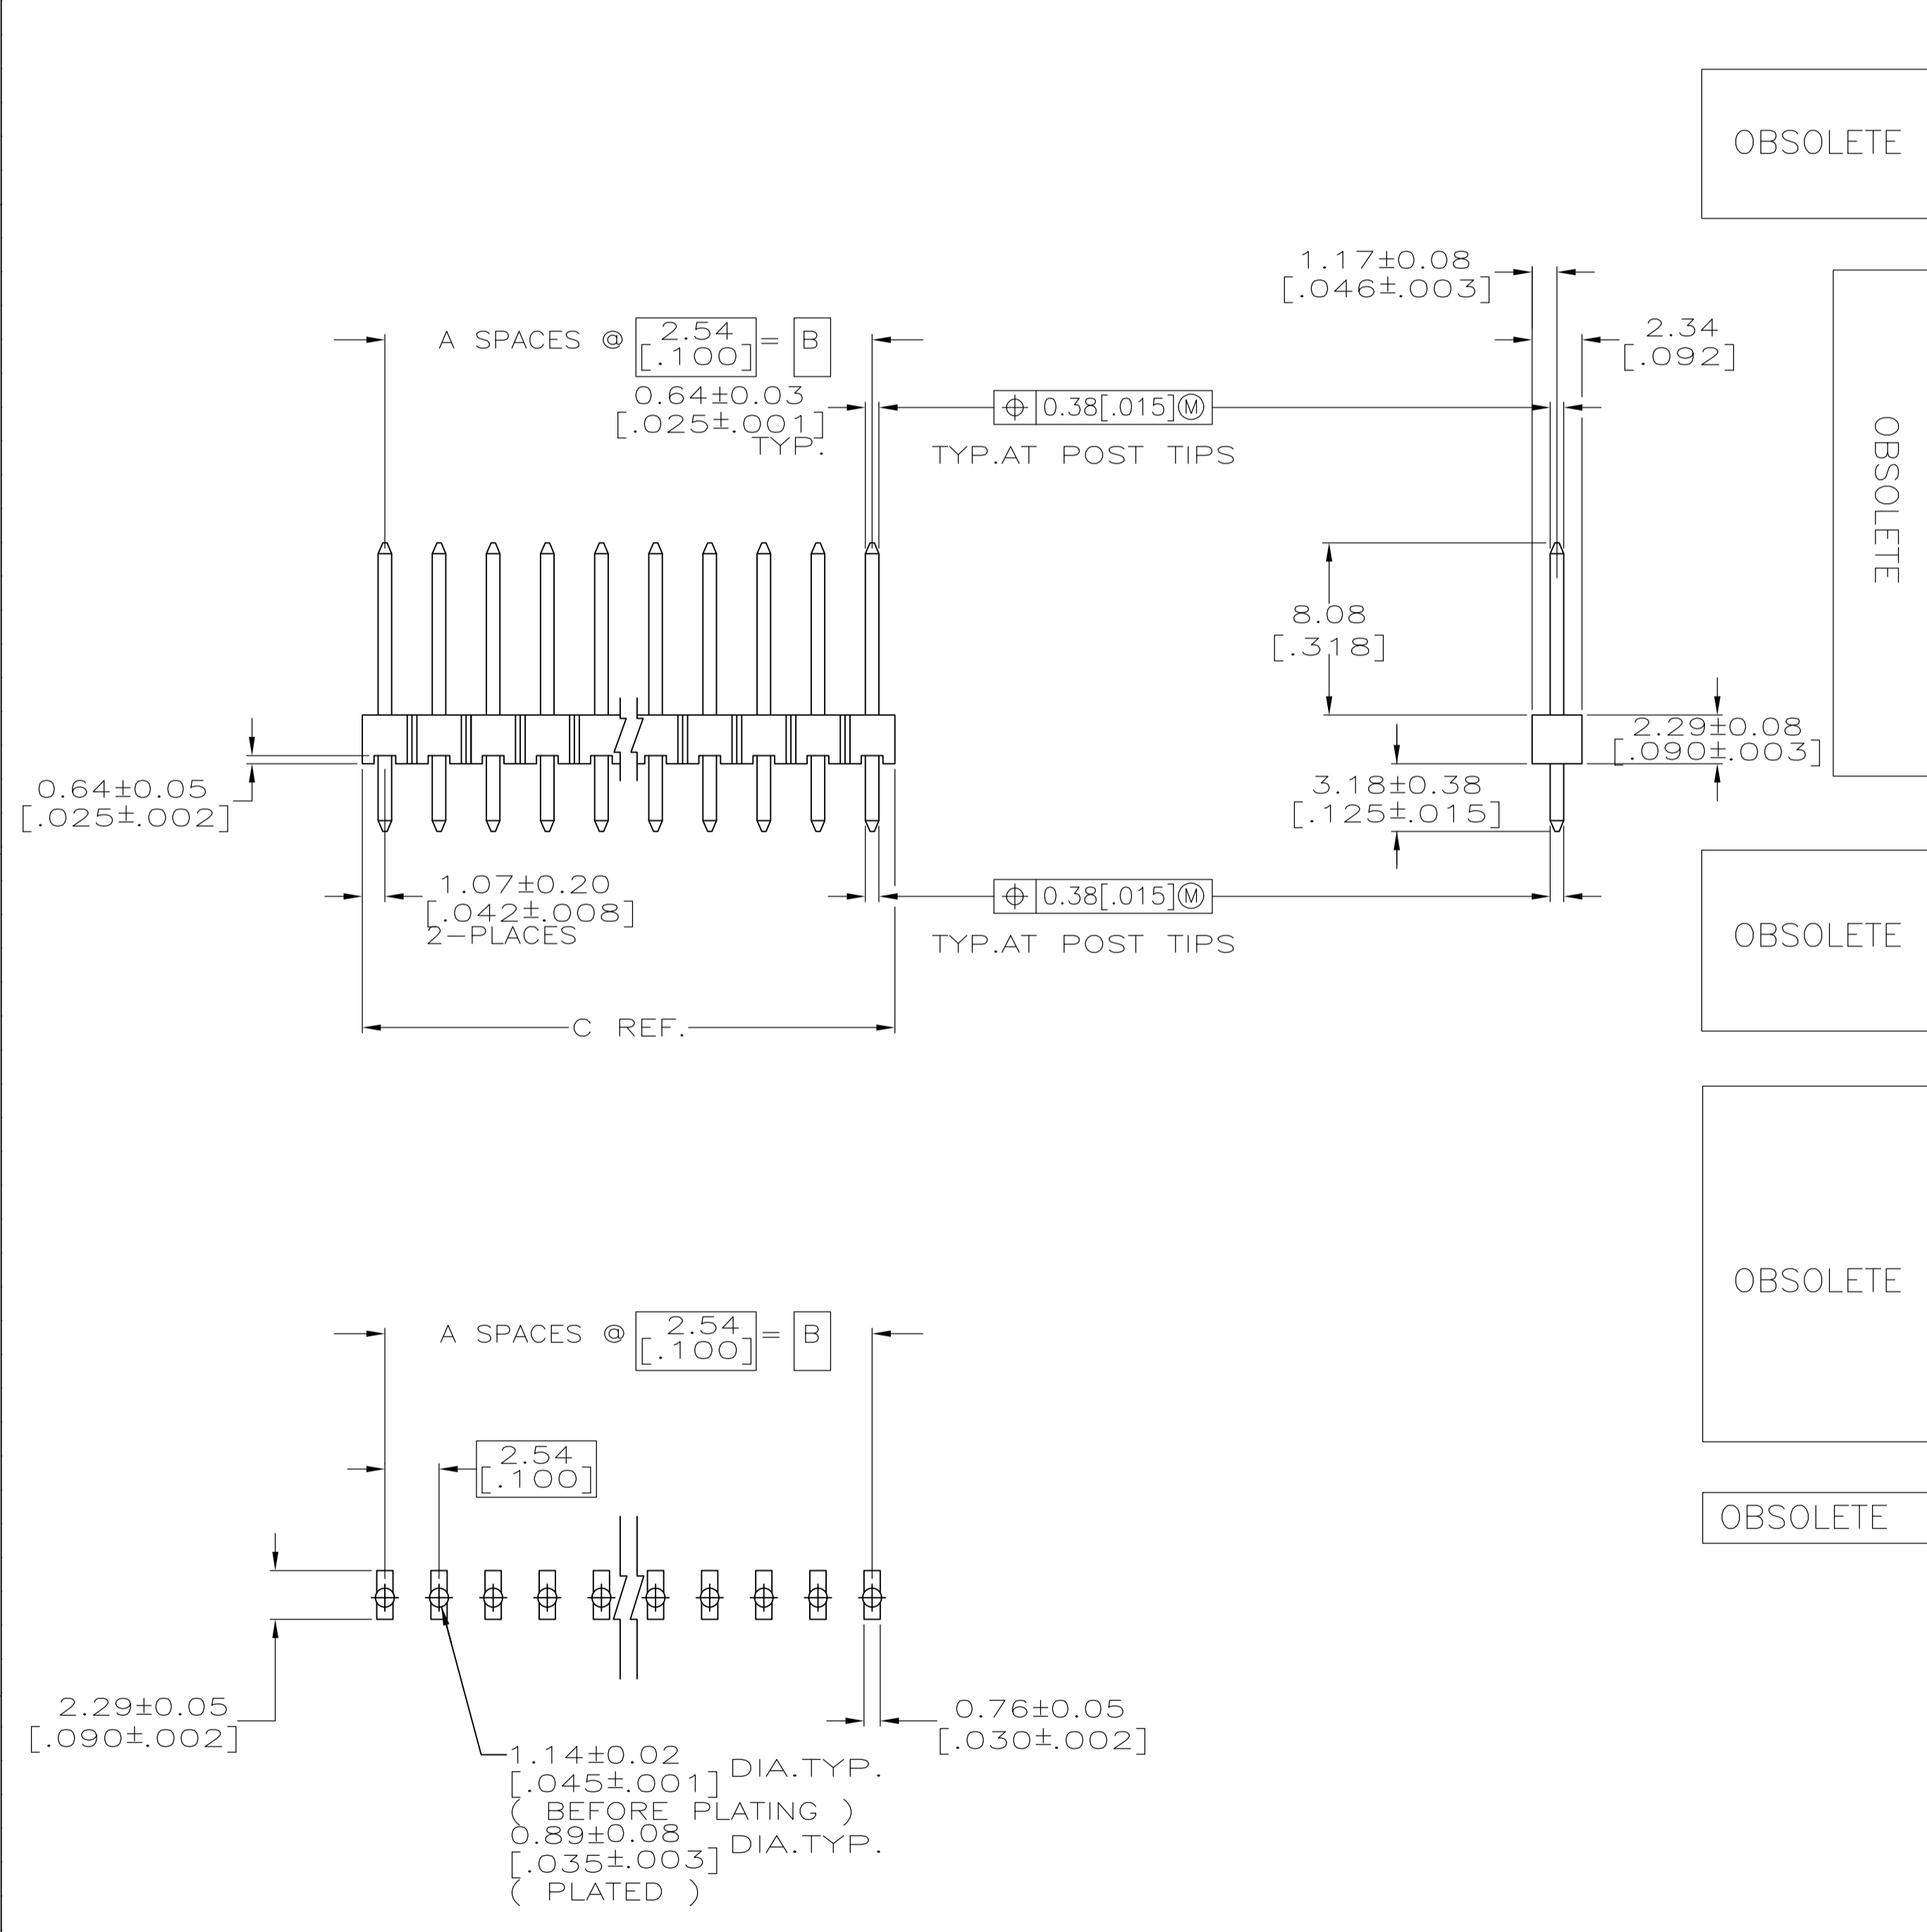

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	
	101.19	99.06		39	40	9-146274-0
	3.984	3.900				
	98.65	96.52		38	39	-8-146274-9
	3.884	3.800				
	96.11	93.98		37	38	-8-146274-8
	3.784	3.700				
	93.57	91.44		36	37	-8-146274-7
	3.684	3.600				
	91.03	88.90		35	36	8-146274-6
	3.584	3.500				
	88.49	86.36		34	35	-8-146274-5
	3.484	3.400				
	85.95	83.82		33	34	-8-146274-4
	3.384	3.300				
	83.41	81.28		32	33	-8-146274-3
	3.284	3.200				
	80.87	78.74		31	32	-8-146274-2
	3.184	3.100				
	78.33	76.20		30	31	-8-146274-1
	3.084	3.000				
	75.79	73.66		29	30	-8-146274-0
	2.984	2.900				
	73.25	71.12		28	29	-7-146274-9
	2.884	2.800				
	70.71	68.58		27	28	-7-146274-8
	2.784	2.700				
	68.17	66.04		26	27	-7-146274-7
	2.684	2.600				
	65.63	63.5		25	26	-7-146274-6
	2.584	2.500				
	63.09	60.96		24	25	7-146274-5
	2.484	2.400				
	60.55	58.42		23	24	-7-146274-4
	2.384	2.300				
	58.01	55.88		22	23	-7-146274-3
	2.284	2.200				
	55.47	53.34		21	22	-7-146274-2
	2.184	2.100				
	52.93	50.80		20	21	-7-146274-1
	2.084	2.000				
	50.39	48.26		19	20	7-146274-0
	1.984	1.900				
	47.85	45.72		18	19	-6-146274-9
	1.884	1.800				
	45.31	43.18		17	18	-6-146274-8
	1.784	1.700				
	42.77	40.64		16	17	-6-146274-7
	1.684	1.600				
	40.23	38.10		15	16	-6-146274-6
	1.584	1.500				
	37.69	35.56		14	15	-6-146274-5
	1.484	1.400				
	35.15	33.02		13	14	-6-146274-4
	1.384	1.300				
	32.61	30.48		12	13	-6-146274-3
	1.284	1.200				
	30.07	27.94		11	12	6-146274-2
	1.184	1.100				
	27.53	25.40		10	11	-6-146274-1
	1.084	1.000				
	24.99	22.86		9	10	6-146274-0
	.984	.900				
	22.45	20.32		8	9	5-146274-9
	.884	.800				
	19.91	17.78		7	8	5-146274-8
	.784	.700				
	17.37	15.24		6	7	5-146274-7
	.684	.600				
	14.83	12.70		5	6	5-146274-6
	.584	.500				
	12.29	10.16		4	5	5-146274-5
	.484	.400				
	9.75	7.62		3	4	5-146274-4
	.384	.300				
	7.21	5.08		2	3	5-146274-3
	.284	.200				
	4.67	2.54		1	2	5-146274-2
	.184	.100				
	2.13	-		0	1	5-146274-1
	.084	-				

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	
	101.19	99.06		39	40	4-146274-0
	3.984	3.900				
	98.65	96.52		38	39	-3-146274-9
	3.884	3.800				
	96.11	93.98		37	38	-3-146274-8
	3.784	3.700				
	93.57	91.44		36	37	-3-146274-7
	3.684	3.600				
	91.03	88.90		35	36	-3-146274-6
	3.584	3.500				
	88.49	86.36		34	35	-3-146274-5
	3.484	3.400				
	85.95	83.82		33	34	-3-146274-4
	3.384	3.300				
	83.41	81.28		32	33	-3-146274-3
	3.284	3.200				
	80.87	78.74		31	32	-3-146274-2
	3.184	3.100				
	78.33	76.20		30	31	-3-146274-1
	3.084	3.000				
	75.79	73.66		29	30	-3-146274-0
	2.984	2.900				
	73.25	71.12		28	29	-2-146274-9
	2.884	2.800				
	70.71	68.58		27	28	-2-146274-8
	2.784	2.700				
	68.17	66.04		26	27	-2-146274-7
	2.684	2.600				
	65.63	63.5		25	26	-2-146274-6
	2.584	2.500				
	63.09	60.96		24	25	-2-146274-5
	2.484	2.400				
	60.55	58.42		23	24	-2-146274-4
	2.384	2.300				
	58.01	55.88		22	23	-2-146274-3
	2.284	2.200				
	55.47	53.34		21	22	-2-146274-2
	2.184	2.100				
	52.93	50.80		20	21	-2-146274-1
	2.084	2.000				
	50.39	48.26		19	20	-2-146274-0
	1.984	1.900				
	47.85	45.72		18	19	-1-146274-9
	1.884	1.800				
	45.31	43.18		17	18	-1-146274-8
	1.784	1.700				
	42.77	40.64		16	17	-1-146274-7
	1.684	1.600				
	40.23	38.10		15	16	-1-146274-6
	1.584	1.500				
	37.69	35.56		14	15	-1-146274-5
	1.484	1.400				
	35.15	33.02		13	14	-1-146274-4
	1.384	1.300				
	32.61	30.48		12	13	-1-146274-3
	1.284	1.200				
	30.07	27.94		11	12	-1-146274-2
	1.184	1.100				
	27.53	25.40		10	11	-1-146274-1
	1.084	1.000				
	24.99	22.86		9	10	-1-146274-0
	.984	.900				
	22.45	20.32		8	9	-146274-9
	.884	.800				
	19.91	17.78		7	8	146274-8
	.784	.700				
	17.37	15.24		6	7	146274-7
	.684	.600				
	14.83	12.70		5	6	146274-6
	.584	.500				
	12.29	10.16		4	5	146274-5
	.484	.400				
	9.75	7.62		3	4	146274-4
	.384	.300				
	7.21	5.08		2	3	146274-3
	.284	.200				
	4.67	2.54		1	2	146274-2
	.184	.100				
	2.13	-		0	1	146274-1
	.084	-				

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN I. HOFFMAN 6/12/95	APPROVED G. DUBNICZKI 6/29/95
0 PLC ± -	1 PLC ± 0.127[.005]	2 PLC ± 0.254[.010]	3 PLC ± 0.51[.02]
4 PLC ± 0.0127[.0005]	ANGLES ±	NAME: G. DUBNICZKI 6/29/95	
MATERIAL: ④	FINISH: SEE TABLE	APPLICATION SPEC: -	PRODUCT SPEC: -
WEIGHT: -	SIZE: A1	CAGE CODE: 00779	DRAWING NO: 146274
CUSTOMER DRAWING	SCALE: 4:1	SHEET: 1 of 1	REV: G2

STE TE Connectivity

HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL