

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







#### Materials

- 1. Spring contact, beryllium copper, 2 μm nickel plated
- 2. Insulator, POM, black
- 3. Center contact, brass, 2 µm nickel plated
- 4. Shell, C3604 brass, 2 µm nickel plated

#### **Electrical requirements**

Dielectric strength: 1 min @ 500 Vac Insulation resistance: 100 M $\Omega$  @ 500 Vdc Contact resistance: 30 m $\Omega$  or less

Rated voltage: 20 Vdc Rated current: 4 A

#### **Mechanical requirements**

Insertion force: 0.3-2.5 kgf Withdrawal force: 0.3-2.5 kgf

Durability: 5000 mating cycles while maintaining; 0.3 kgf min. insertion force, 0.2 kgf min. withdrawal force and a

less

than 100 m $\Omega$  contact resistance.

### **Environmental requirements**


Damp test: 40 °C, RH 90-100% for 96 hrs. Cool to ambient and recover for 2 hours. Maintain dielectric strength of 500 Vac for 1 min, insulation resistance of 50 M $\Omega$  @ 500 Vdc minimum and a contact resistance of 100 m $\Omega$  or less.

Dry test: 70 °C, RH 70-85% for 96 hrs. Cool to ambient and recover for 2 hours. Maintain insulation resistance of 50 M $\Omega$  @ 500 Vdc minimum and a contact resistance of 100 m $\Omega$  or less.

Salt spray test: 35 °C, RH 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 80 m $\Omega$ .

## **Operating range**

-25 to 70 °C, relative humidity of 85% or less

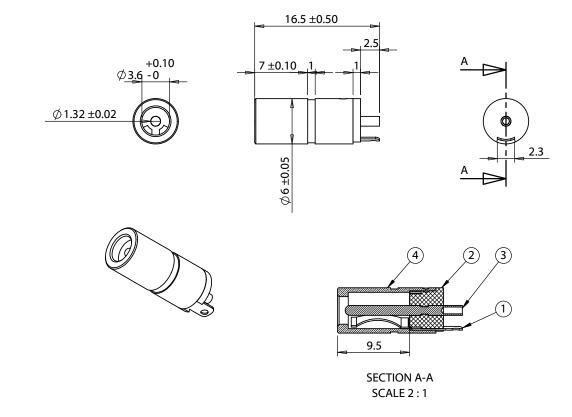

Revision:	Date:	Description:	Prepared: 2016.03.31	Notes:		
Α	10/21/2009	Initial release	GL 16:47:48 -07'00'	RoHS and REACH compliant		FNSII ITY
A1	12/5/2011	Updated description	Verified:  LA    Clipitally signed by LA   Clipitally signed by LA   Clipitally signed laby LA   Clipitally signed	Function test: no open, no short circuit, no intermittent		el 1.541.323.3228 800 877.670.7118
A2	2/20/2012	Updated drawing	Dimensions are in		fa	ax 1.541.323.4202 <i>web</i> tensility.com
A3	11/9/2012	Added test data	millimeters. Tolerances: X: ± 0.5 mm	Description: Connector, dc jack, 3.5x1.35xL16.5 mm, molding	Size:	Part number: 50-00057
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	style	Scale	: 5:1 Sheet 1 of 1

5 4 3 2