



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Ratings

Voltage: 20 Vdc
Current: 8 A

Operating Temperature Range

-25 to 70°C, relative humidity of 85% or less

Materials

- ① Insulator: Nylon, black
- ② Pin: C3604 brass, 1 μm nickel plated
- ③ Shell: C3604 brass, 1 μm nickel plated
- ④ Spring contact: C5191 phosphor bronze, 1 μm nickel plated

Electrical Requirements




Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 30 mΩ or less

Mechanical Requirements

Insertion force: 0.3-3 kgf
Withdrawal force: 0.3-3 kgf
Life cycle: 5000 mating cycles while maintaining 0.3 kgf min. insertion force, 0.2 kgf min. withdrawal force and less than 100 mΩ contact resistance.

Environmental Requirements

Cold test: -25 ±3 °C for 48 hours without deformation
Heat test: 70 °C, relative humidity 70-85% for 96 hours without deformation
Contact resistance: 100 mΩ or less
Insulation resistance: 50 MΩ @ 500 Vdc 1 min
Humidity test: 40 °C, relative humidity 90-100% for 96 hours
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 50 MΩ @ 500 Vdc 1 min
Contact resistance: 100 mΩ or less
Salt spray test: 35±2 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 80 mΩ.

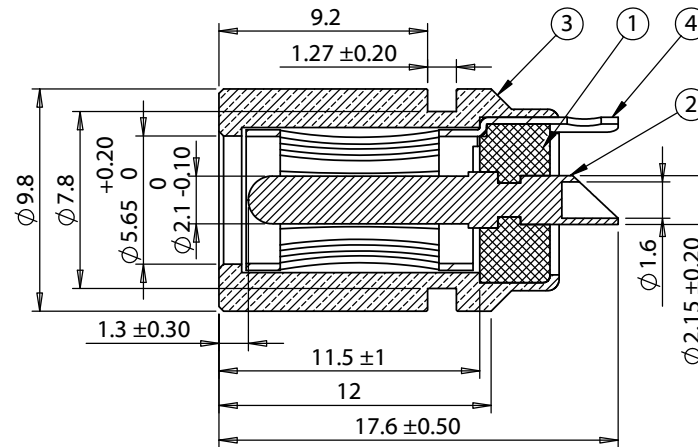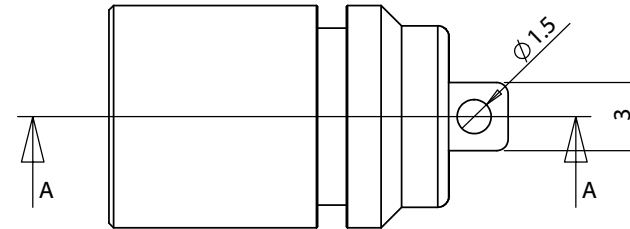

SECTION A-A
SCALE 3 : 1

Revision:	Date:	Description:
A	3/24/2016	Initial release
A1	4/11/2016	Modified specs and shell dimensions
A2	1/11/2017	Modified tolerances

Prepared:
GL
Digitally signed by GL
Date: 2017.01.12
08:52:57 -08'00'

Verified:
DN
Digitally signed by DN
Date: 2017.01.12 09:45:03
-08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:
Connector, dc jack, 5.5x2.1xL17.6 mm, molding style, spring contacts. solder tab

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A	Part number: 50-00533
Scale: 2:1	Sheet 1 of 1