



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TPT/XF Twisted Pair Transceivers

Models 50010-10, 50020-10, 50010R-10, and 50020R-10

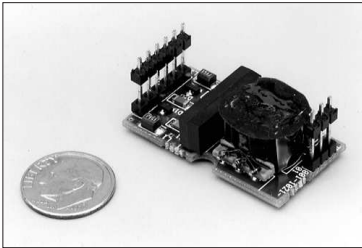

Description

The TPT/XF Twisted Pair Transceivers provide a simple, cost-effective method of adding a LONWORKS transceiver to any Neuron[®] Chip-based control system. The TPT/XF transceivers consist of transformer-isolated differential Manchester encoded communication transceivers and connectors for power, the Neuron Chip communications port (CP) lines, and the twisted pair network data bus. The small size of the transceivers permits them to be mounted almost anywhere on a printed circuit board assembly, either as a socketed or soldered component. The TPT/XF transceivers are available as either a 78kbps transceiver (Models 50010-10 and 50010R-10) or 1.25Mbps transceiver (Models 50020-10 and 50020R-10). The TPT/XF transceivers can communicate with TP/XF control modules operating at the same bit rate for those applications using both types of devices.

Models 50010R-10 and 50020R-10 are compliant with the European Directive 2002/95/EC on the restriction of the use of certain hazardous substances (RoHS) in electrical and electronic equipment.


The TPT/XF transceivers use transformers to isolate them from the twisted pair network bus. This design provides excellent common mode rejection and permits the system to operate in electrically noisy environments. It also reduces the susceptibility of the system to ground loops caused by the use of multiple node power supplies that float relative to ground. This architecture makes the transceivers ideal for communicating over long distances in industrial environments. The transceivers are self-contained network transceivers, and require only a +5VDC power source, a Neuron 3120[®] Chip or Neuron 3150[®] Chip and associated memory, an oscillator, and application electronics to form a complete node.

Using TPT/XF transceivers can save hundreds of hours of development time compared with designing custom transceivers. The TPT/XF transceivers are designed to comply with FCC and VDE requirements, minimizing time consuming and expensive laboratory transceiver testing. As UL, CSA, and TÜV Recognized components, the transceivers can be integrated into products with

- ▼ Complete LONWORKS[®] communication transceivers
- ▼ Differential Manchester encoded signaling for polarity-insensitive network wiring
- ▼ Transformer isolation for common mode rejection
- ▼ 78 kilobits per second bit rate (TPT/XF-78) at 1400 meters worst case¹; 1.25 megabits per second bit rate (TPT/XF-1250) at 130 meters worst case¹
- ▼ +5VDC input voltage
- ▼ Designed to comply with FCC and VDE Level B requirements
- ▼ UL, CSA, TÜV Recognized component
- ▼ LONMARK[®] certifiable

minimal additional safety testing. The transceivers meet the LONMARK interoperability guidelines and are economically priced for OEM applications. In addition, the 78kbps and 1.25Mbps transceivers fit in the same mounting holes, allowing a common motherboard to be used with both devices.

Echelon offers a comprehensive range of development tools, network interfaces, routers, and network service tools to simplify the task of designing products using the transceivers. Technical support for the transceivers is available through Echelon's LonSupport[™] Premier technical assistance program.

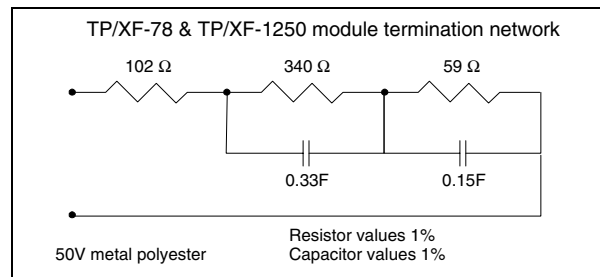

Specifications

Function	Twisted pair transceiver
Data Communications Type	Transformer-isolated, Differential Manchester coding
Isolation Between Network and I/O Connectors ²	0-60 Hz (60 seconds): 1000V _{RMS} 0-60 Hz (continuous): 277V _{RMS}
Common Mode Range	0-60 Hz 277V _{RMS}
Electrostatic Discharge Network Connector	No errors to 15,000V, no hard failures to 20,000V tested per MIL-STD 883
EMI	Designed to comply with FCC Part 15 Level B and VDE 0871 Level B
Listings	UL 1950, CSA C22.2 No. 950, TÜV EN60950
Bit Rate	TPT/XF-78: 78kbps TPT/XF-1250: 1.25Mbps
Maximum Nodes Per Channel	TPT/XF-78: 64 (0 to +70°C), 44 (-40 to +85°C) TPT/XF-1250: ⁴ 64 (0 to +70°C), 32 (-20 to +85°C), 16 (-40 to +85°C)
Network Bus Wiring	Level 4, 22AWG twisted pair ³
Network Bus Length	TPT/XF-78: 1400 m (4600 feet) worst case ¹ TPT/XF-1250: 130 m (430 feet) worst case ¹
Maximum Stub Length	TP/XF-78: 3 m (9.8 feet) TP/XF-1250: 0.3 m (12")
Network Bus Polarity	Polarity insensitive
Power-down Bus Protection	High impedance when unpowered
Supply Voltage	+5VDC ±5%
Typical Supply Current	10mA
Communication Port Connector	1 x 6 0.64 mm x 0.64 mm (0.025" x 0.025") post, 2.54 mm (0.1") centers, tin plated
Network Connector	1 x 3 0.64 mm x 0.64 mm (0.025" x 0.025") post, 2.54 mm (0.1") centers, tin plated
Network Terminators	Required at both ends of network
Operating Temperature	-40 to +85°C
Non-operating Temperature	-40 to +85°C
Operating Humidity (non-condensing)	25-90% RH @ +70°C
Non-operating Humidity (non-condensing)	95% RH @ +70°C
Dimensions	38 mm x 15 mm x 20 mm, (1.5" x 0.59" x 0.8")
Recommended Hole Pattern	0.041" diameter holes on 0.1" grid

Ordering Information

Product	Echelon Model Number
TPT/XF-78 Module	50010-10, 50010R-10
TPT/XF-1250 Module	50020-10, 50020R-10
LONWORKS TPT Twisted Pair Transceiver Module User's Guide (order separately—not shipped with product)	078-0025-01

Notes:

1. Worst case distance figures are based on variations in node distribution, node temperature, node voltage, wire characteristics, transceiver characteristics, and Neuron Chip characteristics, and allow for an average wire temperature of up to +55°C.
2. Safety agency hazardous voltage barrier requirements are not supported.
3. For wire specifications, see Junction Box and Wiring Guidelines for Twisted Pair LONWORKS Networks, 005-0023-01 Rev D or later.
4. Proper operation of TPT/XF-1250 segments requires that no more than eight (8) TPT/XF-1250 and/or TP/XF-1250 modules be used in any 16-meter (53 feet) sections of bus wiring.

* Neuron Chips and TPT transceivers were not designed for use in equipment or systems which involve danger to human health or safety or a risk of property damage and Echelon assumes no responsibility or liability for use of the Neuron Chips or TPT Transceivers in such applications.

Copyright © 2001-2006, Echelon Corporation. Echelon, LON, LONWORKS, LONMARK, LonBuilder, NodeBuilder, LonManager, LonTalk, LonUsers, LonPoint, Digital Home, Neuron, 3120, 3150, LNS, /LON, LONWORLD, ShortStack, Panoramax, LonMaker, the Echelon logo, and the LonUsers logo are trademarks of Echelon Corporation registered in the United States and other countries. LonLink, LonResponse, LonSupport, LONews, Open Systems Alliance, OpenLDV, Powered by Echelon, LNS Powered by Echelon, Panoramax Powered by Echelon, LONWORKS Powered by Echelon, Networked Energy Services Powered by Echelon, NES Powered by Echelon, Digital Home Powered by Echelon, Pyxos, and Thinking Inside the Box are trademarks of Echelon Corporation. Other trademarks belong to their respective holders.

Disclaimer

Neuron Chips, Free Topology Twisted Pair Transceiver Modules, and other OEM Products were not designed for use in equipment or systems which involve danger to human health or safety or a risk of property damage and Echelon assumes no responsibility or liability for use of the Neuron Chips or Free Topology Twisted Pair Transceiver Modules in such applications. ECHELON MAKES AND YOU RECEIVE NO WARRANTIES OR CONDITIONS, EXPRESS, IMPLIED, STATUTORY OR IN ANY COMMUNICATION WITH YOU, AND ECHELON SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. 003-0324-01B