



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Toner Cartridge Bag

The Toner Cartridge Bag is an opaque construction that provides moisture barrier protection. This bag features a tough polyester outer layer, an aluminum layer for moisture protection, and a heat sealable black polyethylene. Open Top and ZipTop reclosable styles are available.

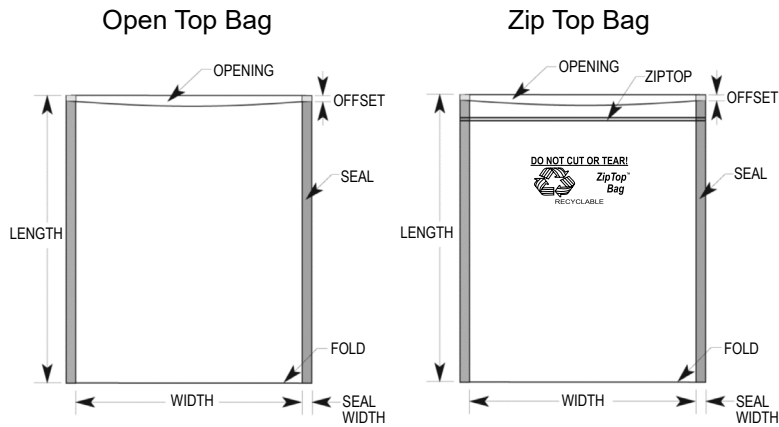

Tolerance: Width -0, +1/4"
 Length +/- 1/8" Offset 0 to 1/4"
 Seal width 3/8" with a tolerance of +/- 1/8"

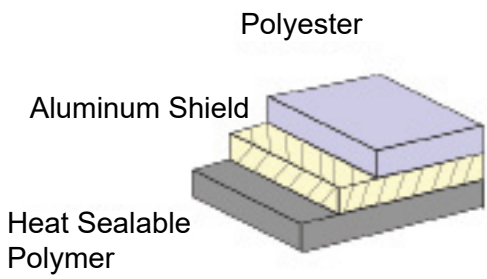

Physical	Typical Value	Testing Method
Moisture Vapor Transmission Rate (MVTR)	< 0.05 grams/100 sq. in./24 hrs.*	MIL-STD-3010C Method 3030
Tensile Strength	6000 PSI, 41 MPa	ASTM D882
Puncture Resistance	13 lbs, 58 N	MIL-STD-3010 Method 2065
Seal Strength	11 lbs, 49 N	ASTM D882
Thickness	1.9 mils, 0.05 mm +/-15%	MIL-STD-3010 Method 1003
Heat Sealing Conditions		Typical Value
Temperature	250°F – 400°F, 121°C – 190°C	
Time	0.5 – 3.0 seconds	
Pressure	30 – 60 PSI, 206 – 414 KPa	

*Standard deviation of 0.007 grams/100 sq. in./24 hrs.

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

RoHS 2, REACH, and Conflict Minerals Statement
 None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Specifications and procedures subject to change without notice.



TONER CARTRIDGE BAG		
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000	DRAWING NUMBER TONER CARTRIDGE BAGS	DATE March 2016