



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



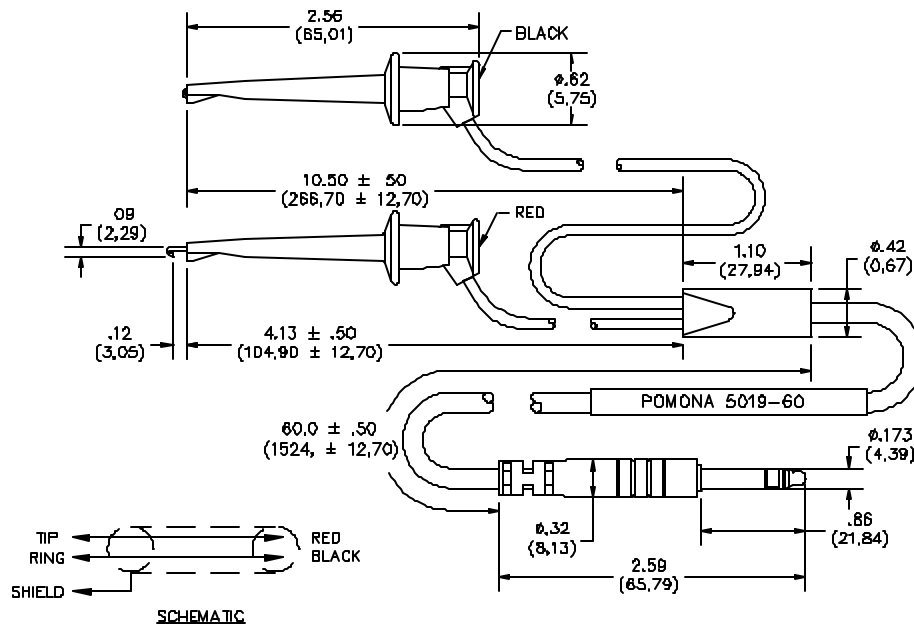

FEATURES:

- Shielded cable to reduce noise
- Provides quick access from Bantam Jack to terminals
- Bantam Plug is molded to the cable to provide optimum durability

MATERIALS:

Conn.:

1st End - Minigrabber®

Contact – Beryllium Copper

Spring – Stainless Steel

Finish: Contact – Gold Plated

Insulation: Handle – Glass filled nylon.

Color matches wire.

Barrel – Glass filled nylon. Color matches wire.

Marking: “Pomona Electronics”
“Minigrabber®”

Breakout Leads: 20 AWG, 41 x 36 T.C., PVC insulated, 2.21 (.087) O.D. Color: Red and Black, Red lead connected to tip, Black lead connected to ring.

Molded Breakout: PVC, Color – Gray

Cable: 2 conductor shielded stranded copper, 7 x 30, PVC insulated, 4.57 (.180) O.D. Color – Gray

Conn.:

2nd End – Bantam Plug (Miniature Phone Plug)

Finish: 5019 brass, 5019N nickel plated .

Insulation: PVC. Color - Black

RATINGS:

Operating Temperature: +50°C (+122°F) Max.

Operating Voltage: 300 VRMS/DC

ORDERING INFORMATION: Model 5019-60 and 5019N-60

Standard Length – 60” (1520mm)

Ordering Example: 5019N-60, cable is 60” long with brass nickel plated Bantam connector.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060