



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Surface Mountable Inductors**

INDUCTANCE (μH) ±5%  
TEST FREQUENCY (MHz)  
SRF MINIMUM (MHz)  
DC RESISTANCE MAXIMUM (OHMS)  
CURRENT RATING MAXIMUM (mA)  
DASH NUMBER\*

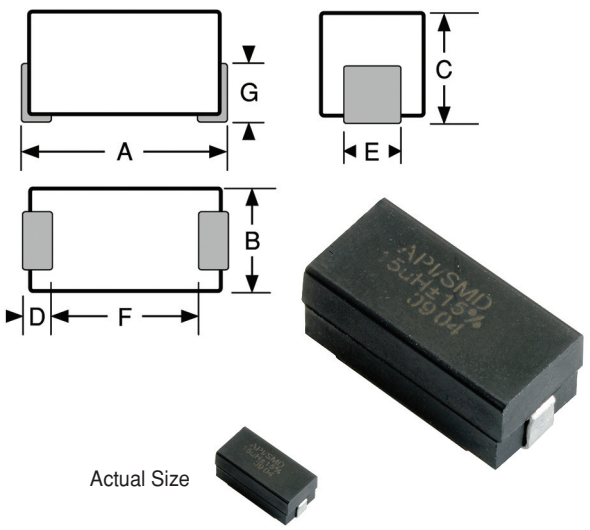

Actual Size

**Physical Parameters**

	Inches	Millimeters
A	0.490 to 0.520	12.44 to 13.21
B	0.230 to 0.250	5.84 to 6.35
C	0.210 to 0.230	5.33 to 5.84
D	0.050 Min.	1.27 Min.
E	0.055 to 0.095	1.397 to 2.413
F	0.330 (Ref. only)	8.38 (Ref. only)
G	0.120 (Ref. only)	3.04 (Ref. only)

**Weight Max.** (Grams) 1.5

**Mechanical Configuration** Units are encapsulated in an epoxy molded surface mount package.

**Operating Temperature Range** -55°C to +125°C

**Current Rating at 90°C Ambient** 35°C Rise

**Maximum Power Dissipation at 90°C** 0.405 W

**Marking** API/SMD; 5022; inductance with units and tolerance; date code (YYWWL). Note: An R after 5022 indicates a RoHS component.

Example: 5022R-102G

API/SMD  
5022R  
1.0uH±2%  
0542A

**Packaging** Tape & reel (24mm): 13" reel, 800 pieces max.; 7" reel not available

**Made In the U.S.A.**

SERIES 5022 PHENOLIC CORE						
DASH NUMBER*	INDUCTANCE (μH) ±5%	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)	
-151J	0.15	50	25.0	525	0.030	3500
-161J	0.16	50	25.0	525	0.040	3025
-181J	0.18	50	25.0	500	0.043	2915
-201J	0.20	50	25.0	475	0.047	2790
-221J	0.22	50	25.0	450	0.055	2580
-241J	0.24	45	25.0	415	0.060	2470
-271J	0.27	45	25.0	400	0.070	2285
-301J	0.30	45	25.0	380	0.080	2140
-331J	0.33	45	25.0	360	0.090	2015
-361J	0.36	45	25.0	345	0.098	1935
-391J	0.39	45	25.0	330	0.100	1915
-431J	0.43	45	25.0	315	0.110	1825
-471J	0.47	45	25.0	310	0.120	1750
-511J	0.51	45	25.0	300	0.130	1680
-561J	0.56	50	25.0	280	0.135	1645
-621J	0.62	50	25.0	260	0.140	1615
-681J	0.68	50	25.0	250	0.150	1555
-751J	0.75	50	25.0	230	0.180	1425
-821J	0.82	50	25.0	220	0.220	1300
-911J	0.91	50	25.0	210	0.240	1240
-102J	1.00	50	25.0	200	0.290	1125
-112J	1.10	33	7.9	190	0.420	930
-122J	1.20	33	7.9	180	0.420	930
-132J	1.30	33	7.9	170	0.480	875
-152J	1.50	33	7.9	160	0.500	855
-162J	1.60	33	7.9	155	0.600	780
-182J	1.80	33	7.9	150	0.650	755
-202J	2.00	33	7.9	140	0.800	675
-222J	2.20	33	7.9	135	0.950	620
-242J	2.40	33	7.9	130	1.100	575
-272J	2.70	33	7.9	120	1.200	550
-302J	3.00	33	7.9	115	1.800	455
-332J	3.30	33	7.9	110	2.000	430
-362J	3.60	33	7.9	105	2.150	415
-392J	3.90	33	7.9	100	2.300	395
-432J	4.30	33	7.9	95	2.400	390
-472J	4.70	33	7.9	90	2.600	375

Optional Tolerances: H = 3% G = 2% F = 1%

\*Complete part # must include series # PLUS the dash #

For surface finish information, refer to [www.delevanfinishes.com](http://www.delevanfinishes.com)