



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 5026 & 5026N Bantam Plug (Miniature Phone Plug) To Alligator Clips

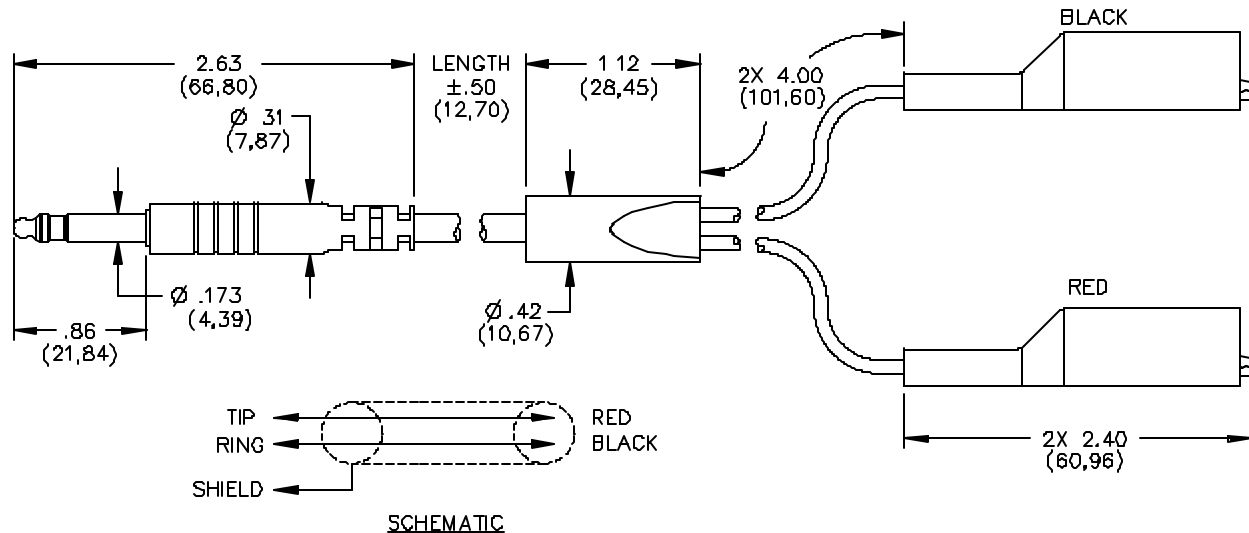

FEATURES:

- Converts Bantam (Miniature Phone Plug) Female into Alligator Clips
- Shielded cable to reduce noise
- Bantam molded to the cable for optimum durability

MATERIALS:

Conn: 1st end: Miniature 3 Cond. Phone Plug. (5026 brass, 5026N nickel plated brass).

Insulation: PVC, black. Sleeve, no connection

Cable: Two cond. Shielded, 22 AWG, 7 x 30 t.c., 4.6 (.180) O.D., Y-mold insulation, PVC, gray

Conn: 2nd end: Alligator clips. Steel, nickel plated. Vinyl boots, one Black and one Red.

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 150 VRMS/DC

Current: 5 Amperes

ORDERING INFORMATION: Model 5026-XX

XX=Cable Length, Standard Lengths: 36" (914), 60" (1524), 84" (2134)

Ordering Example: 5026-84, Cable length is 84" with brass Bantam connector

5026N-60, Cable length is 60" with nickel plated brass Bantam connector

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

PomonaACCESS 90613 (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com