



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



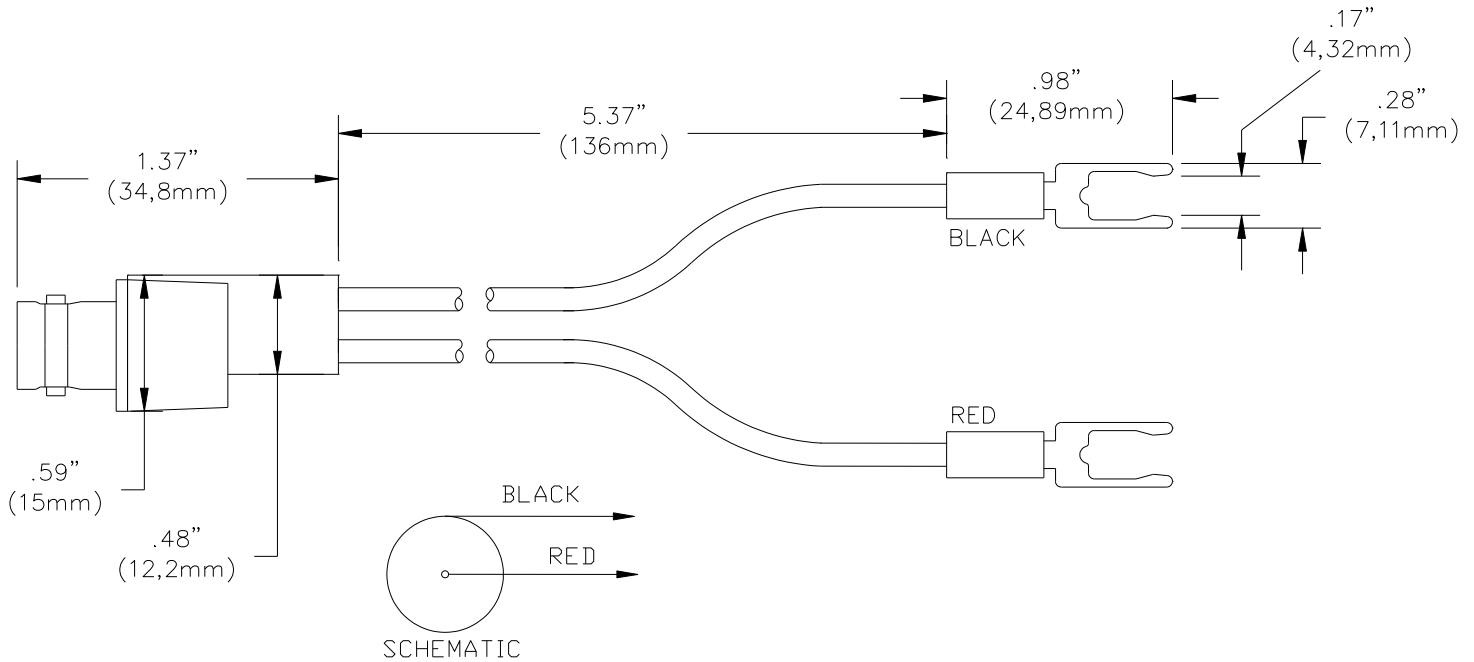

### FEATURES:

- ✓ Converts BNC (male) cables / connectors to a #8 spade lug connector for terminal strip attachment.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC shell is tarnish resistant.
- ✓ BNC center contact is gold plated Beryllium Copper for excellent electrical connection.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

### MATERIALS:

*BNC:* Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

*Dielectric:* PTFE

*Wire:* 20 AWG, PVC

*#8 Spade Lug:* Tin-plated copper alloy

*Lug Insulation:* Vinyl, color matches color of wire

### RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 500VRMS Max.

Operating Temperature: +131°F (+55°C) Max.

### ORDERING INFORMATION: Model 5051

\* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.