



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model 5054 Triaxial Cable Assembly Triaxial 2 Lug Male Each End, On Belden 9222 Triaxial Cable

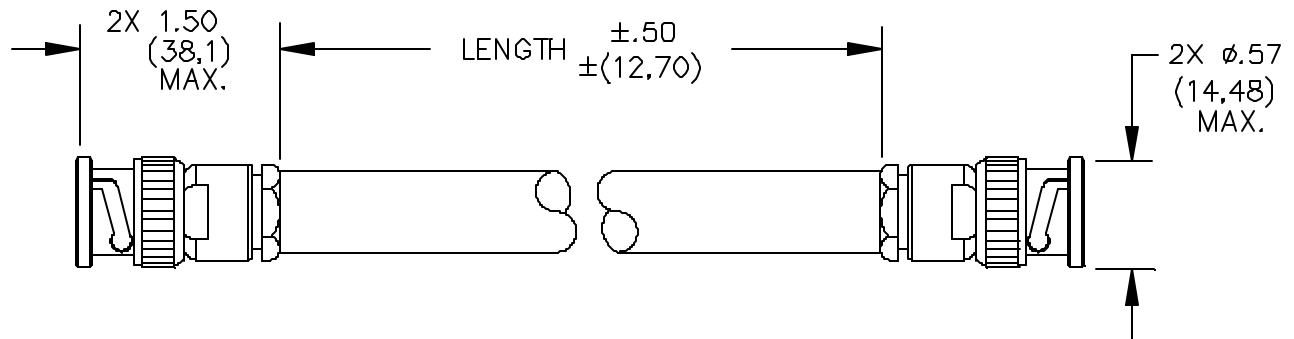

### MATERIALS:

Connector – 1<sup>st</sup> End: Triaxial Cable Male (BNC 2 Lug Bayonet Style)

Body and Fittings: Brass, Tarnish Resistant

Intermediate and Center contacts: Gold Plated Brass per MIL-C-39012

Cable: Belden 9222 Triaxial Cable

20 AWG stranding 7x28, T.C. Polyethylene Insulation, 6.15 (.242) O.D. Color: Yellow

Marking: “POMONA ELECTRONICS 5054-XX”

Connector – 2<sup>nd</sup> End: Same as first.

### RATINGS:

Operating Voltage: 500 VRMS

Nominal Impedance: 50 Ohms

### ORDERING INFORMATION: Model 5054-XX

XX = Length in inches. Std. Lengths: 36”, 60”

Additional lengths can be quoted upon request.

Ordering Example: 5054-36, Cable length will be 36” long

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm.02$ ” (.51 mm), .xxx =  $\pm.005$ ” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA