



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



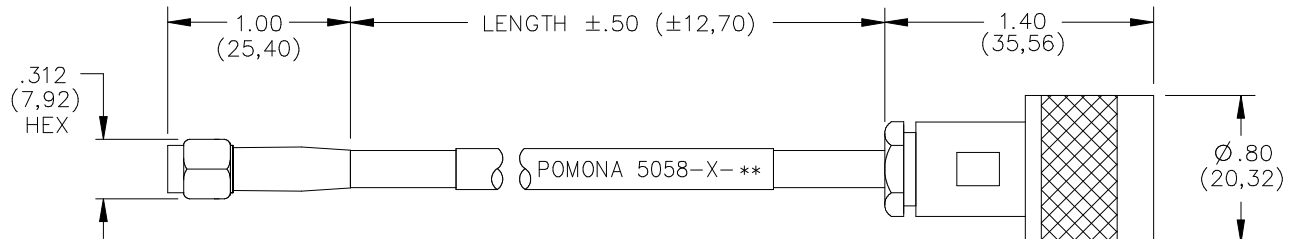

FEATURES:

- Provides a simple means of connection between equipment with both SMA and Type N jacks.
- SMA and N connectors feature PTFE dielectric and tarnish resistant shells for superb electrical performance.
- Gold center contacts assure noise free connections.

MATERIALS:

Type N Male: Body and Fittings – Brass, Tarnish Resistant

Center Contact – Brass, Gold Plated

Dielectric - PTFE

Coaxial Cable: RG142B/U, Double Shielded, O.D. .195" (4,95mm)

SMA Male: Body and Fitting – Steel, Finish – Passivated Steel

Center Contact – Brass, Gold Plated

Dielectric – PTFE

RATINGS:

Operating Temperature: +200°C (+329°F) Max.

Operating Voltage: 335 VRMS Max.

Connector/Cable Impedance: 50 Ohms

ORDERING INFORMATION: Model 5058-X-xx

xx = Cable Length in Inches, Standard Lengths: 36" (91.44cm), 48" (122cm), 60" (152.4cm)

Additional lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA