



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 5090
BNC (F) to 2 Lug Triaxial (M) Adapter

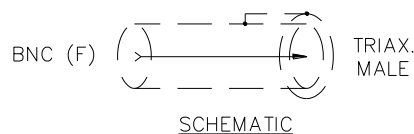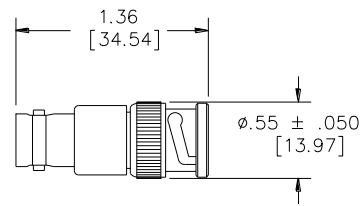

Model 5090
BNC (F) to 2 Lug Triaxial (M) Adapter

Features

- Provides an easy interface between a BNC (F) and a 2 Lug Triax (M).

Materials

Body: Brass, Tarnish Resistant Nickel Plated
Dielectric: PTFE per L-P-403
Center Contact: Male – Brass, Gold Plated
 Female – Beryllium Copper, Gold Plated
Outer Contact: Beryllium Copper, Tarnish Resistant
Marking: "POMONA 5090" (optional)

Ratings

Voltage: For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.
 Maximum voltage for *hands free use* in controlled testing environments: 500 Vdc
 Do not use on circuits where transient stresses can exceed the rated voltage.
Frequency Range: DC to 500 MHz

Ordering Information

Model: 5090
 BNC (F)/2 LUG TRIAXIAL (M)

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.