



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 5142 Cable Assembly – SMD Test Tweezer™ To BNC Male

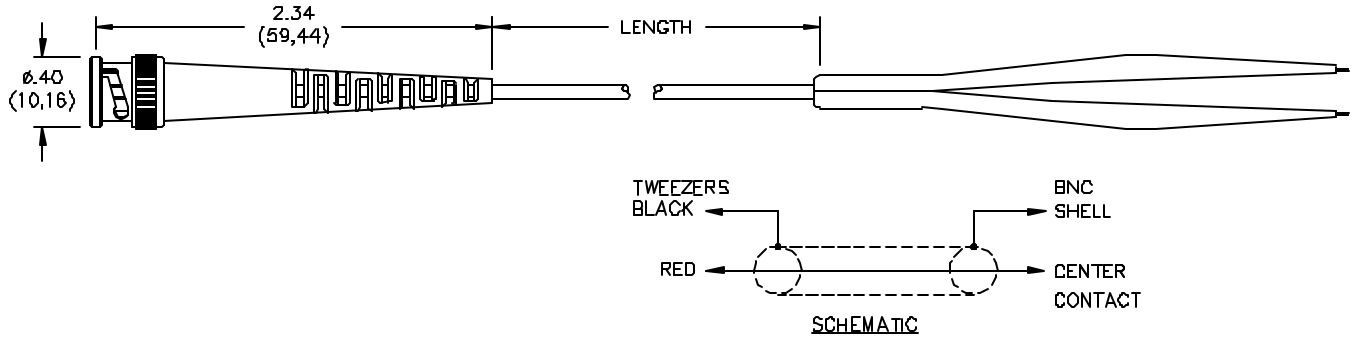

FEATURES:

- Test tweezer clip is specially designed for fast, convenient testing of surface mounted devices (SMDs).
- Durable tips assure a positive electrical connection.
- Cable is 48 inches long.

MATERIALS:

Connector: 1st End – SMD Test Tweezer™

Contact – Beryllium Copper

Tweezer Body – Nylon, glass filled. Color: One half red, one half black

Marking: “POMONA ELECTRONICS, TEST TWEEZERS”

Finish: Contact – Gold plated over Sulfamate nickel 50/100 microinches.

Cable: RG 174/U, 26 AWG, PVC insulated, 2.54 (.100) O.D.

Nominal Impedance: 50 Ohms. Marking: “POMONA ELECTRONICS 5142-K-*”

Molded Breakout: PVC molded to breakout leads and cable. Color: Black

Wire: 20 AWG 41/36 stranded T.C., PVC insulated, 2.21 (.087) O.D. Color matches color of Banana Plugs

Connector: 2nd End – BNC Male

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 45 VAC, 60 VDC

Current: 3 Amperes

ORDERING INFORMATION: Model 5142-K-48

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 909-469-2900 Fax: 909-629-3317
Technical Assistance: 800-241-2060

PomonaACCESS 90805 (800) 444-6785 or (909) 469-2991
More drawings available at www.pomonaelectronics.com