



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



IEC Appliance Inlet C14 with High Frequency Filter, X2Y Technology, ECO design, Front- or Rear Side Mounting

Standard- or Medical-Filter



V-Lock



Screw or rivet fastening
from front or rear side



Screw-on mounting from rear side
(integrated thread)



Description

- Panel Mount :
Screw-on version from front or rear side
- 2 Functions :
Appliance Inlet , High frequency line filter as standard, industrial and medical version , Protection class I
- Quick connect terminals 6.3 x 0.8 mm

Unique Selling Proposition

- Filter for highest frequencies
- X2Y® Technology
- Double shielding for best filter performance
- Metal flange for optimal shielding

Approvals

- VDE Certificate Number: 40023426
- UL File Number: E72928

Characteristics

- Very compact filter for frequencies up to 1 GHz
Patented X2Y Technologie for broadband high frequency filtering
- Double shielding for best filter performance
One single filter design for the given current range
- Designed for standard, industrial and medical applications
Suitable for assembly in metal plated plastic housings
- Suitable for use in equipment according to IEC 60950/60601
Suitable for use in medical equipment according to IEC/UL 60601-1

Other versions on request

- Solder terminals
- Variant with notch for V-Lock mating Cordsets

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.


Technical Data

| | | | |
|---------------------------------|---|-------------------------|--|
| Ratings IEC | 10A @ Ta 40 °C / 250VAC; 50Hz | appliance inlet/-outlet | C14 acc. to IEC 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I |
| Ratings UL/CSA | 15A @ Ta 40 °C / 250VAC; 60Hz | Line Filter | Standard, medical and industrial version, IEC 60939, UL 1283, CSA C22.2 no. 8 Technical Details |
| Leakage Current | standard < 0.5 mA (250 V / 60 Hz) medical < 43/80 µA (250 V / 60 Hz) | MTBF | > 3'300'000h acc. to MIL-HB-217 F |
| Dielectric Strength | > 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec) | | |
| Allowable Operation Temperature | -25 °C to 85 °C | | |
| Climatic Category | 25/085/21 acc. to IEC 60068-1 | | |
| IP-Protection | from front side IP 40 acc. to IEC 60529 | | |
| Protection Class | Suitable for appliances with protection class I acc. to IEC 61140 | | |
| Terminal | Quick connect terminals 6.3 x 0.8 mm | | |
| Panel Thickness | Screw: max 8 mm Mounting screw torque max 0.5Nm | | |
| Material: Housing | Thermoplast / steel tin-plated, black / metallic, UL 94V-0 | | |


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension

Front or rear side mounting for screws with nuts or blind rivets (panel cutout for frontside mounting)

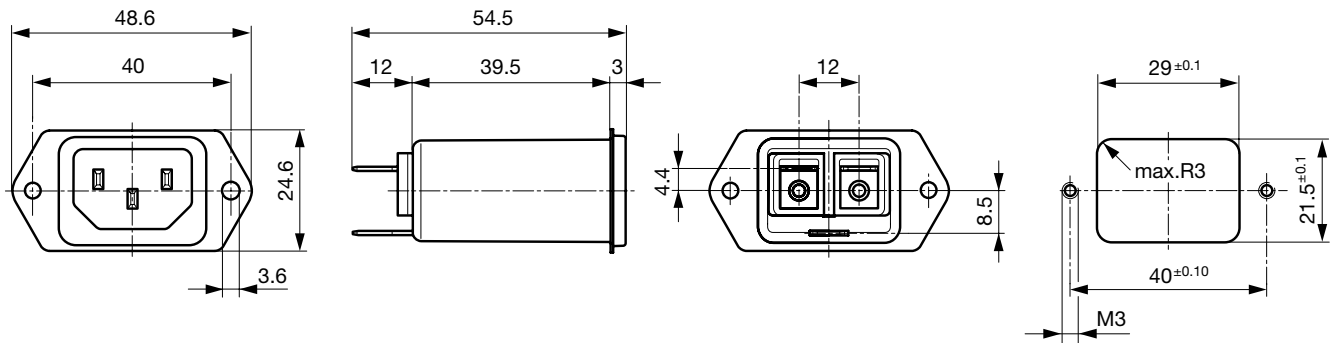


Rear side mounting with pre-formed, threaded holes for M3 screws (panel cutout for rear side mounting)

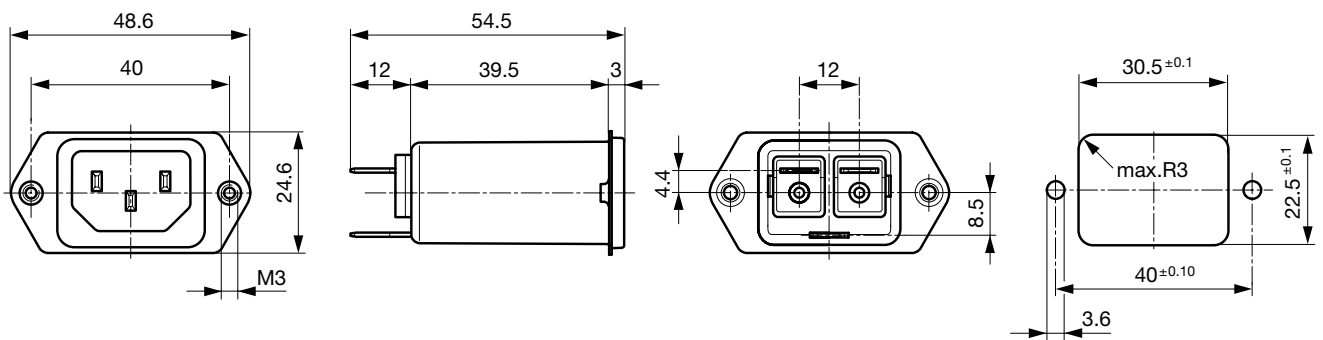**Technical Data of Filter-Components**

| Rated Current [A] | Filter-Type | Capacitance CY [nF] | R [MΩ] |
|----------------------|--------------------------------------|------------------------|--------|
| 10 | Standard Version | 2.5 | - |
| 10 | Standard Version with Bleed Resistor | 2.5 | 1 |
| 10 | Industrial Version | 4.7 | - |
| 10 | Medical Version (M80) | 0.45 | 1 |


Diagrams

Standard and industrial version

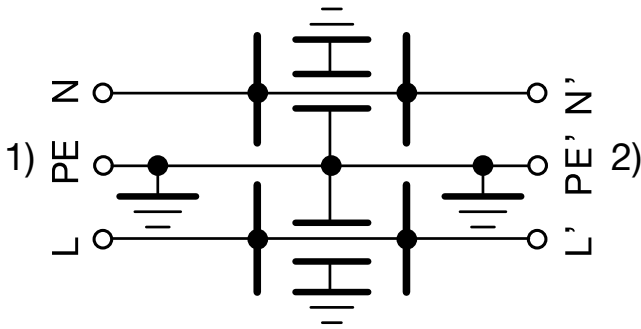

1) Line
2) Load

Medical M80 and standard version with bleed resistor

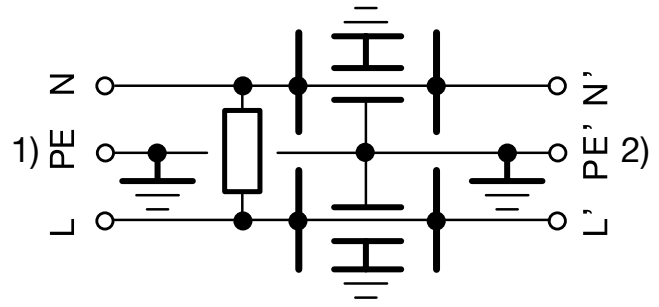


1) Line
2) Load

Attenuation Loss


Standard version

----- 50Ω differential mode ____ 50Ω common mode

CISPR 17 Test Method




Alternate Test Method




same attenuation loss with bleed resistor

Medical version (M80)

CISPR 17 Test Method




Alternate Test Method




Industrial version

CISPR 17 Test Method



Alternate Test Method



Comment about alternate test method
see table of variants

All Variants

| Rated Current IEC [A] | Rated Current UL [A] | Filter-Type | Panel mounting | Mounting side | Order Number |
|-----------------------|----------------------|--------------------------------------|----------------|------------------|-----------------------------|
| 10 | 15 | Standard Version | Screw-on/Rivet | Front-/Rear-Side | 5150.0011.0 |
| 10 | 15 | Standard Version | Screw | Rear Side | 5150.0011.1 |
| 10 | 15 | Standard Version with Bleed Resistor | Screw-on/Rivet | Front-/Rear-Side | 5150.0021.0 |
| 10 | 15 | Standard Version with Bleed Resistor | Screw | Rear Side | 5150.0021.1 |
| 10 | 15 | Industrial Version | Screw-on/Rivet | Front-/Rear-Side | 5150.0041.0 |
| 10 | 15 | Industrial Version | Screw | Rear Side | 5150.0041.1 |
| 10 | 15 | Medical Version (M80) | Screw-on/Rivet | Front-/Rear-Side | 5150.0031.0 |
| 10 | 15 | Medical Version (M80) | Screw | Rear Side | 5150.0031.1 |

| Rated Current IEC [A] | Rated Current UL [A] | Filter-Type | Panel mounting | Mounting side | Order Number |
|-----------------------|----------------------|-------------|----------------|---------------|--------------|
|-----------------------|----------------------|-------------|----------------|---------------|--------------|

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>


The Alternate Test Method allows the measurement in the GHz frequency range whereas the CISPR 17 method does not cover frequencies above 30MHz. The insertion loss is measured in a throughput method (common mode) and a cross coupled method (differential mode). The differential mode measurement of the alternate test method is not directly comparable to the conventional measurement acc. CISPR 17.

Further information on the X2Y filter technology and on the alternate insertion loss measurement method can be found under www.schurter.com/info_emc

Packaging unit 10 Pcs

Accessories

Description



Assorted Covers
Rear Cover

0859.0048



Cord retaining kits
Cord retaining strain relief

Flat head, E
Flat head, G

4700.0005
4700.0007

Mating Outlets/Connectors

Category / Description

[Appliance Outlet Overview complete](#)



| | |
|---|------|
| IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal | 4787 |
| IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal | 4788 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal | 5091 |

[Appliance Outlet further types to 5150](#)

[Connector Overview complete](#)



| | |
|--|---------|
| 4782 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4782 |
| 4022 Mounting: Power Supply Cord, 3 x 1.5 mm ² , Screw clamps, Connector: IEC C13 | 4022 |
| 4785 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4785 |
| 4300-06 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4300-06 |
| 4012 Mounting: Power Supply Cord, 3 x 1.5 mm ² , Screw clamps, Connector: IEC C13 | 4012 |

[Connector further types to 5150](#)

...

Mating Outlets/Connectors shuttered



[Power Cord Overview complete](#)

[VAC13KS, Overview, diverse Connector IEC C13, cord end:](#)

[VAC13KS](#)

[Power Cord further types to 5150](#)
