



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



3 x 5.5mm Rectangular *microLED*® Optopipe™ Optical Light Pipe

Dialight

515-1001

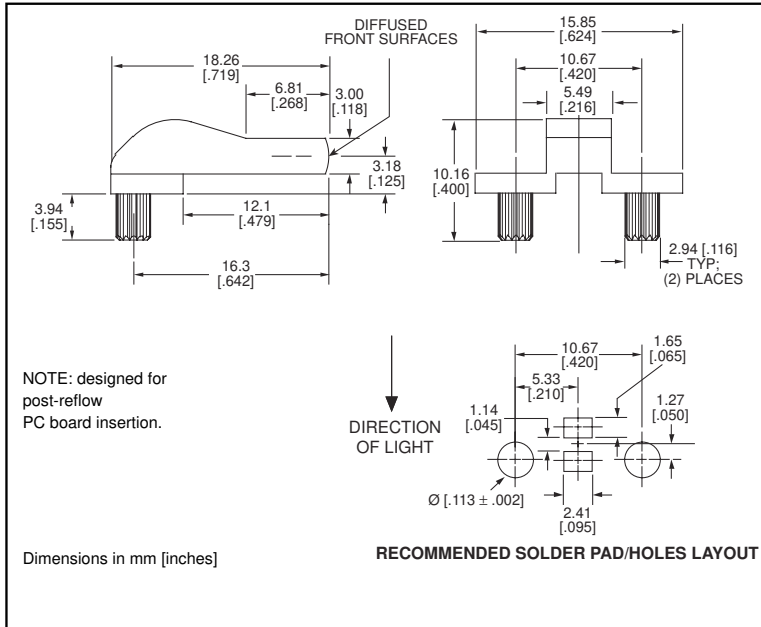

Recommended MicroLED SMT LEDs for use with 515-1001

PART NO.	COLOR	PAGE #
597-3001-2xx	Red	1-21
597-3111-5xx	AlGaAs Red	1-30
597-3121-2xx	AlGaAs Red	1-21
597-3211-2xx	Orange	1-21
597-3211-5xx	Orange	1-30
597-3301-2xx	Green	1-21
597-3301-5xx	Green	1-30
597-3401-2xx	Yellow	1-21
597-3401-5xx	Yellow	1-30
597-7701-2xx	Red/Green	1-23
597-7701-5xx	Red/Green	1-31
597-7721-2xx	Yellow/Green	1-23
597-7721-5xx	Yellow/Green	1-31
597-7731-2xx	Red/Yellow	1-24

2

Features

- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Compatible with Dialight's 515-1000 Three Array Optopipe Light Pipe
- Sleek rectangular design
- Secures to PCB by press-fit

LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

Operating/Storage Temperature

-30°C to +100°C

Dialight Optopipe Light Pipe Description

This Optopipe™ is reliably held in place by 2 press-fit pins located on either side of the light pipe element. This Optopipe™ functions as a through-the-case indicator with a textured finish on the light-emitting surface that increases its viewing angle. The recommended light sources are Dialight's 597 Series PLCC-2 or PLCC-4 Type SMT LEDs. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe™ solutions for your applications.