



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# 2.5mm Round *micro*LED<sup>®</sup> Optopipe™

Optical Light Pipe, Tri-High, Narrow Pitch

# Dialight

# 515-1064

2

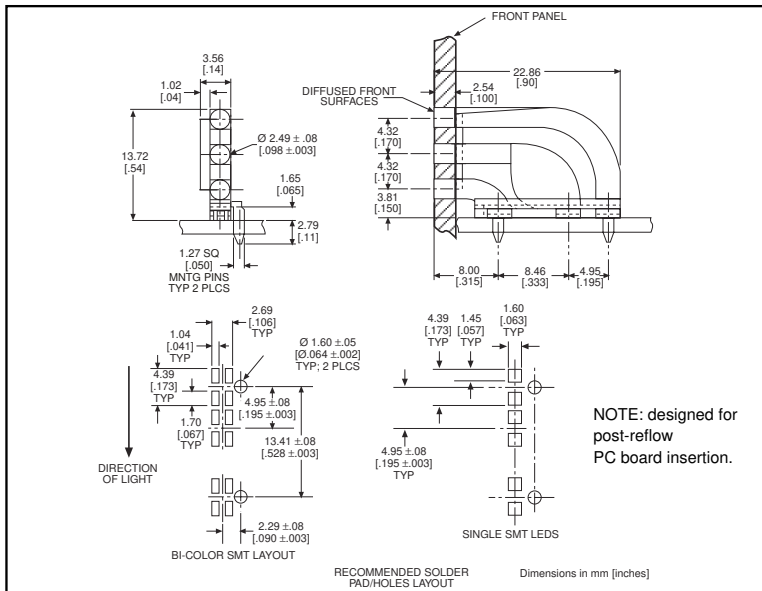

## Recommended MicroLED SMT LEDs for use with 515-1064

PART NO.	COLOR	PAGE #
597-3111-5xx	AlGaAs Red	1-30
597-3211-5xx	Orange	1-30
597-3301-5xx	Green	1-30
597-3401-5xx	Yellow	1-30
597-7701-5xx	Red/Green	1-31
597-7721-5xx	Yellow/Green	1-31

### Features

- Suitable for High Density Arrays (.200 min array pitch)
- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Allows tri-level SMT indicators
- Secures to PCB by press-fit

### Dialight Optopipe Light Pipe Description

This Optopipe™ has 3 vertical 2.5mm diameter elements placed 0.170" apart. They are bright and have good optical isolation. Similar in appearance to our 3mm tri-level 564 Series, they can be placed in arrays with an 0.200" pitch. It can utilize single or multi-color LEDs. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe™ solutions for your applications.

### LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

### Operating/Storage Temperature

-30°C to +100°C