



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 5187 BNC (Male) With Molded Strain Relief To Minigrabber® Test Clips

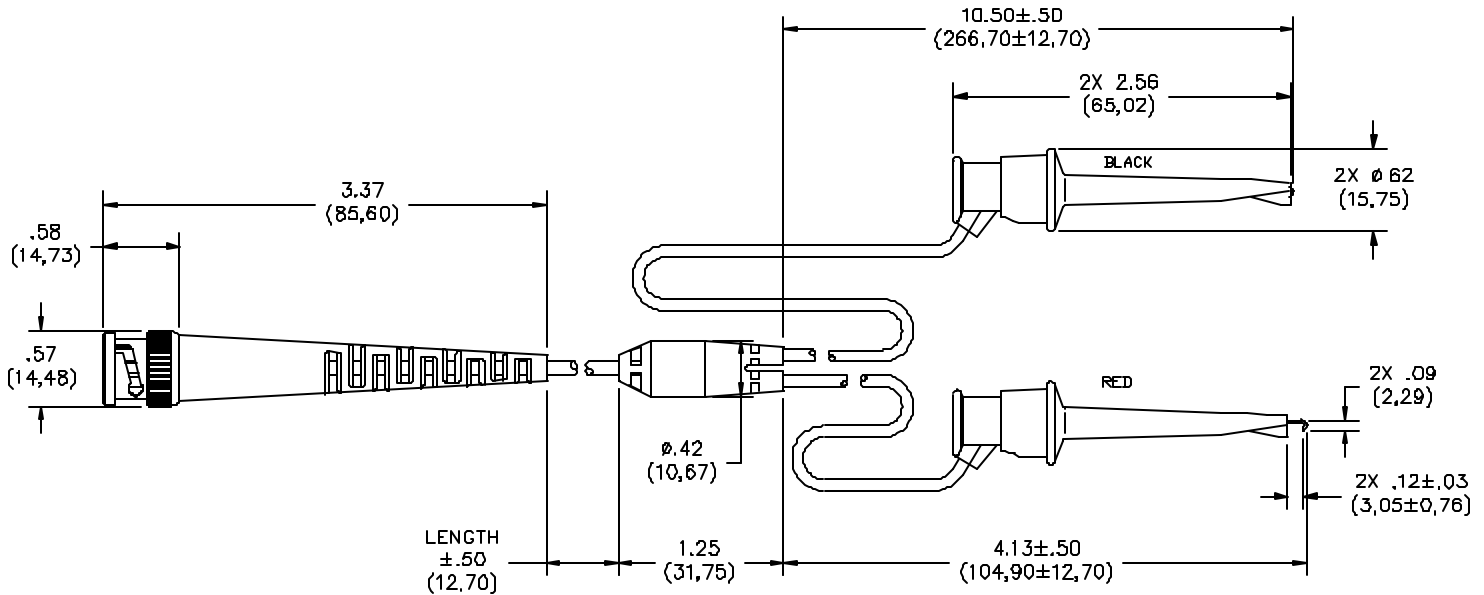

FEATURES:

- BNC Cable breakouts to Minigrabber® Test Clips for test versatility.
- BNC connector and breakout wires are molded directly to the cable for added pull strength.
- Grabber hook attaches to terminal sizes up to .060" (1,5mm)
- Schematic: Black Grabber to BNC Shell, Red Grabber to BNC Center Contact.

MATERIALS:

BNC: Body: Brass, Nickel Plated, Center Pin: Brass, Gold Plated, Impedance: 50 Ohms

Strain Relief and Molded Breakout: PVC, Color: Black

Breakout Wires: 20 AWG Stranding 41 x 36 t. c., PVC Insulated, .087" (2,21 mm) O.D.,
Color Matches Grabbers

Cable: "C" Cable: RG58C/U, .195" (5.0mm) O.D., Color: Black, 20AWG (Strand 19 x .0071 t.c.)

"K" Cable: RG174/U, .100" (2.5mm) O.D., Color: Black, 26 AWG (Strand 7 x 34 Bare Copper)

Marking "POMONA" 5187-C-XX" or "5187-K-XX"

Grabber: Contact – Beryllium Copper, Gold Plated

Spring – Stainless Steel

Insulation – Glass Filled Nylon. Color: one red, one black

RATING:

Operating Voltage: 300 VRMS

Operating Temperature: 50°C (+122°F) Max.

ORDERING INFORMATION: Model 5187-Cable Code- Length in Inch

Cable Code: -C = RG58C/U, -K = RG174/U, XX = Lengths in Inches, Std. Lengths: 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm) Additional lengths are available upon request.

Ordering Example: 5187-C-36, Cable will be 36" (91,44cm) of RG58C/U.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 909-469-2900 Fax: 909-629-3317
Technical Assistance: 800-241-2060

PomonaACCESS 90458 (800) 444-6785 or (909) 469-2991
More drawings available at www.pomonaelectronics.com