

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







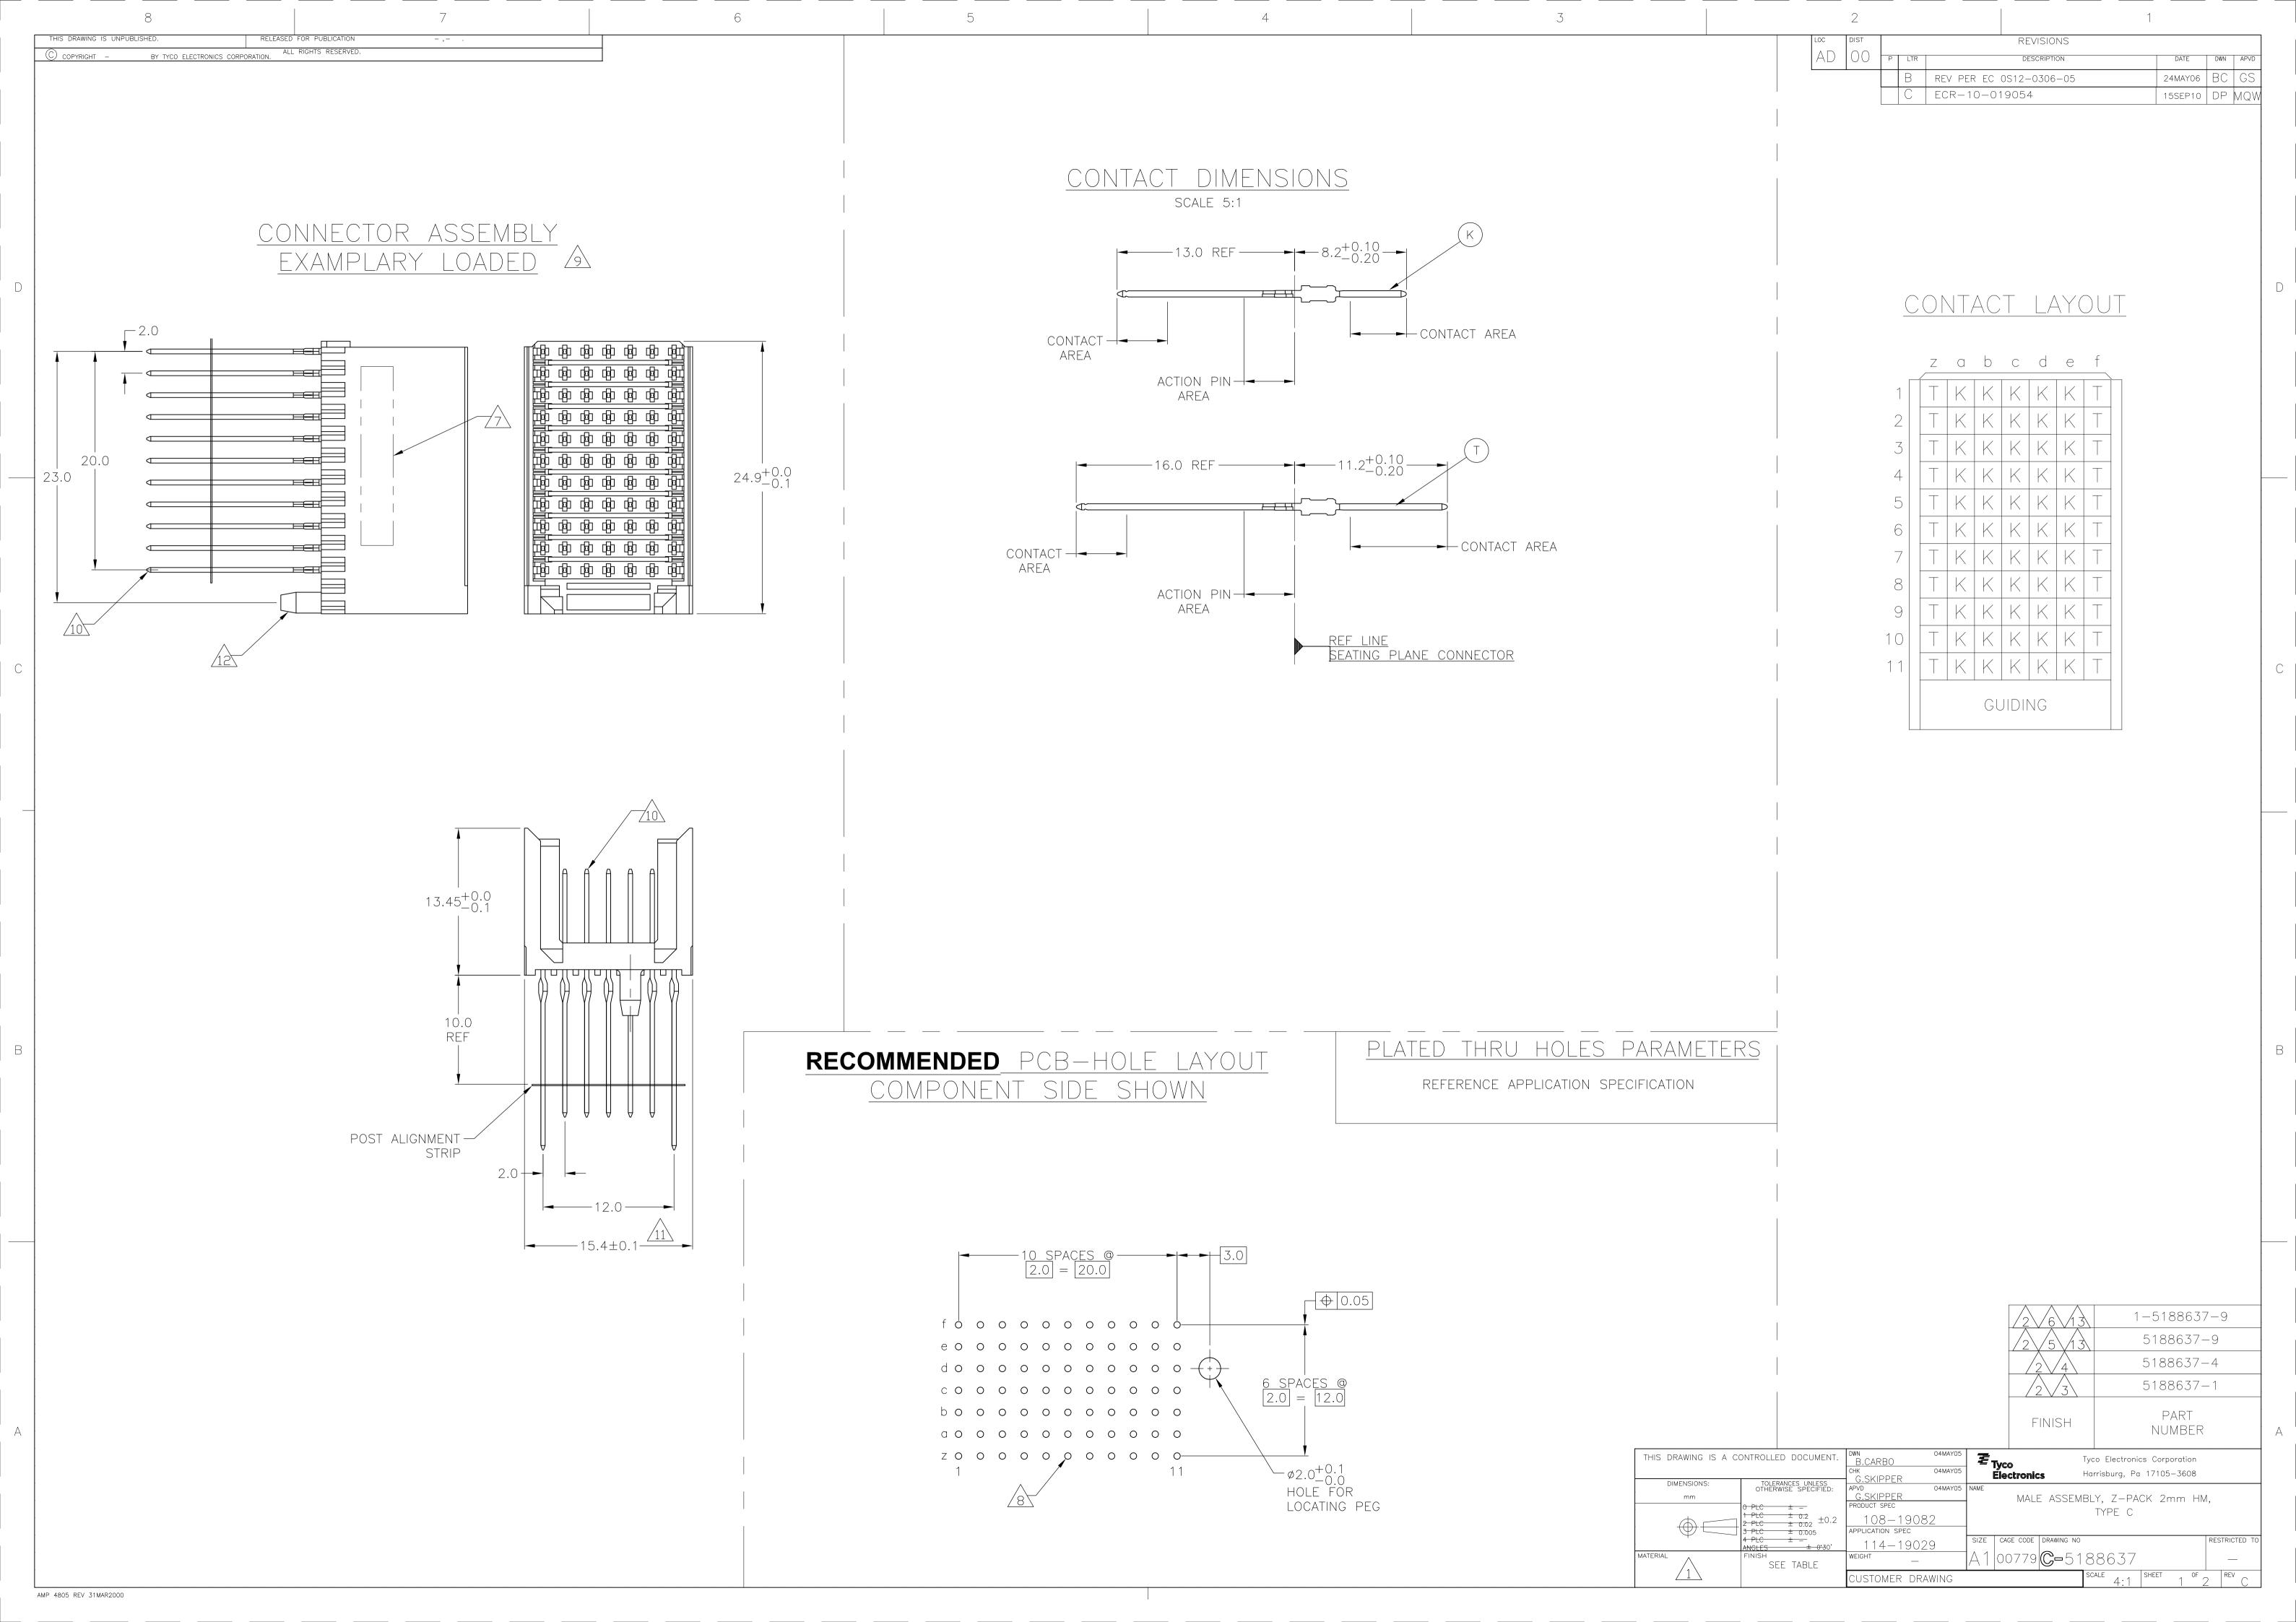

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION REVISIONS BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED. C COPYRIGHT -DESCRIPTION DATE DWN APVE - SEE SHEET 1 _ | - | -1 MATERIAL: CONTACT: PHOSPHOR BRONZE. HOUSING: GLASS-FILLED POLYESTER. 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5μm MIN TIN. FOR PLÁTING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER. CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2. 4 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 1. $\sqrt{5}$ connector tested and qualified against telcordia gr-1217-core quality level 3, CENTRAL OFFICE APPLICATIONS. 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3, UNCONTROLLED ENVIROMENT APPLICATIONS. $\sqrt{7}$ connector marked with part number and date code. ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS, MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION. 8 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID PATTERN DEFINED BY CONTACT LAYOUT. 9 FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT". 10 for actual pin dimensions see "contact dimensions". 11 TO BE MEASURED AT BOTTOM OF SHROUD. 12 LOCATION PEG. 13 CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT, TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

AMP 4805 REV 31MAR2000

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

TOLERANCES UNLESS OTHERWise SPECIFIED:

Mm

TOLERANCES UNLESS OTHERWise SPECIFIED:

MPU

SPEC # 0.002

PIC #
1 PLC # 0.02

2 PLC # 0.005

4 PLC # 0.005

5 PLC # 0.005

5 PLC # 0.005

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

2 PLC # 0.005

5 PLC # 0.005

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

2 PLC # 0.005

5 PLC # 0.005

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC # 0.005

6 PLC #
1 PLC # 0.02

5 PLC # 0.005

6 PLC #