



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



5210F Series Panel Mounted LED Indicator Light

Description and Features

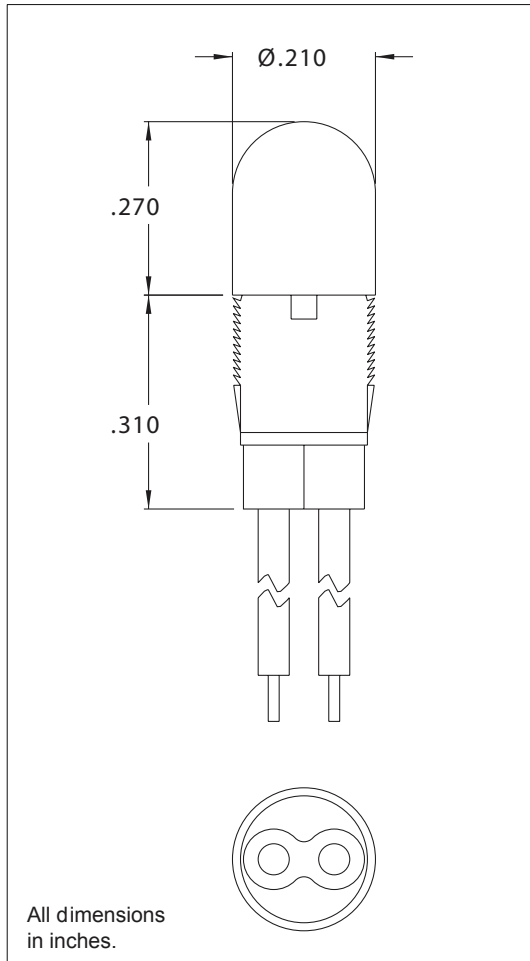

Features

This is an insulated lead version of the 5200F Series Sub-miniature Super Brite LED assembly that offer superior performance in a package that is economical to buy and install. This series gives protection against static discharge.

Mounting: Will snap-fit into Ø.187/.192 hole in panels .020/.097 thick

Wire leads: No. 26 AWG, 4.4/4.8 long, stripped .180/.320

Anode(+): Red lead

Lens: Polycarbonate

Housing: Polycarbonate

Electro-optical Characteristics

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @ 1ms-300pps (A)	Reverse Break-down Voltage Min. (V)
5210F1	Red	6.0	10	30	2.0	3.0	1.0	5
5210F5	Green	12.0	20	30	2.2	3.0	.09	5
5210F7	Yellow	20.0	20	30	2.1	3.0	3.0	5
5210F6-5V	Blue	(Uses #680 lamp, incandescent 200,000 hours, 5V, .06A)						