imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Pomona®

Model 5243 & 5520 Kit Do-It-Yourself SMD Grabber Test Clips

Kit containing 10 pieces of 5243, one of each color.

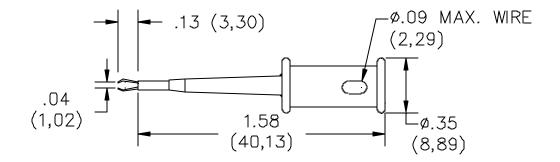

MATERIALS:

Contact – Stainless steel, Type 301, ½ Hard Spring – Stainless steel, Type 302. Cap – Glass Filled Nylon. Marking: "Model 5243" Barrel – Glass filled nylon. Color: Matches color of cap. Marking: "POMONA GRABBER®" Finish: Contact – Gold plated per MIL-G-45204,

Type II, 30 to 50 microinches.

RATINGS:

Operating Temperature: +102° C. (+216° F) Max. Operating Voltage: 30VAC / 60VDC Max. Current: 0.5 Amperes

ORDERING INFORMATION: Model 5243 & 5520 Kit

Standard Colors: Available in 10 colors: -0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White Ordering Example: 5243-2 Color is Red Ordering 5520 "Kit" – contains one color each of the 5243-*.

SIMPLIFIED ASSEMBLY PROCEDURE

- 1. Pull off thumb cap to expose contact connection.
- 2. Thread wire through thumb cap and strip 3.18 (1/8).
- 3. Insert stripped end through hole on contact and solder.
- 4. Slide thumb cap back onto contact.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
C:\Laura Goldberg\FlukeDataSheet\d5243 K5520 1 01.doc	

PomonaACCESS 90319 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1