



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



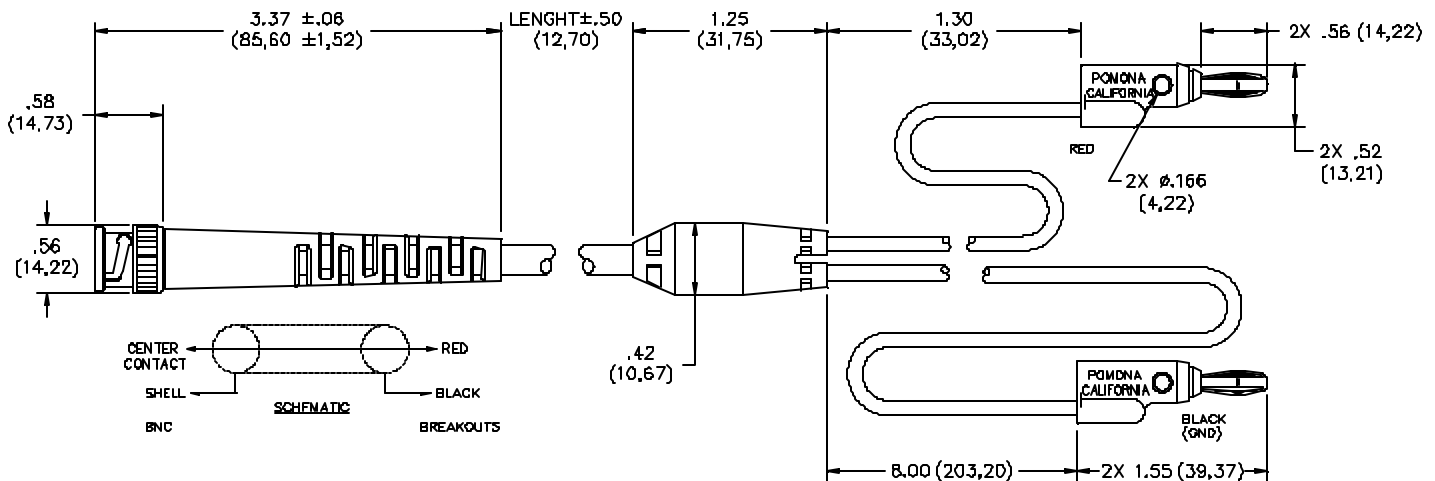

FEATURES:

- Cable enables BNC based test instruments to interface to banana jacks.
- Banana plugs can be stacked on top or side of the banana plugs for additional test versatility.
- BNC connector, wire breakout and banana plugs are molded directly to the cable for added pull strength.

MATERIALS:

BNC: Body: Brass, Nickel Plated, Center Pin: Brass, Gold Plated, Impedance: 50 Ohms

Strain Relief: PVC, Color: Black

Cable: RG58C/U, Impedance: 50 Ohms Nom., Cap. (pF/Ft). 30.8, O.D. .195" (5,0 mm) Nom., Color: Black

Marking: "POMONA 5268-C-XX"

Molded Breakout: PVC, Color: Black

Breakout Leads: 20 AWG, Stranding 41 x 36 t.c., PVC Insulated, .087" (2,21mm) O.D.

Banana Plugs: Body – Brass, Nickel Plated

Spring – Beryllium Copper, Nickel Plated

Insulation – Polypropylene, Color: One Black, One Red

RATING:

Operating Temperature: 50°C (+122°F) Max.

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 500 WVDC Max.

ORDERING INFORMATION: Model 5268-C-XX

XX = Cable Length Std. Lengths: 12" (30,5 cm), 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm). Additional lengths can be quoted upon request.

Ordering Example: 5268-C-36 , Cable length will be 36" (91,44 cm) long.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA