



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



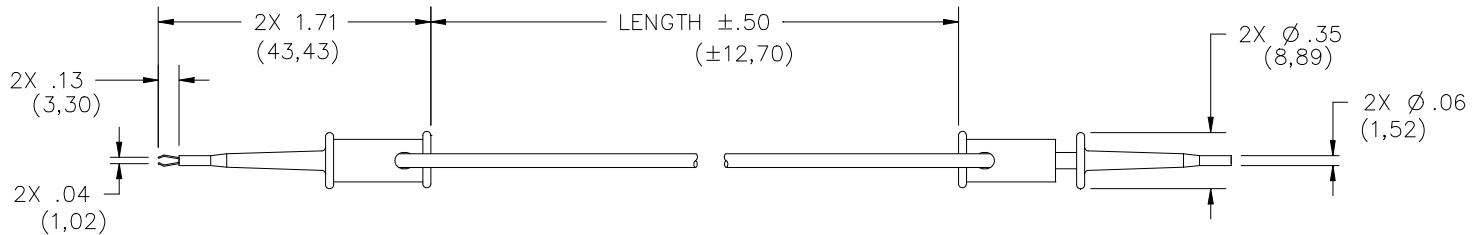

FEATURES:

- Ideal for providing a temporary jumper wire between surface mount devices.

MATERIALS:

SMD Grabber® test clip

Contact - Stainless Steel

Spring - Stainless Steel

Cap - Glass filled nylon. Color matches color of wire

Barrel - Glass filled nylon. Color matches color of wire

Marking: "POMONA GRABBER®"

Finish: Gold plated

Wire: 22 AWG, PVC insulated

Marking: "Model 5301"

RATINGS:

Operating Temperature: +102°C (+216°F) Max.

Voltage: Hand-held testing 33 Vrms/70 Vdc Max.

Hands free testing in controlled voltage environments: 150 WVDC Max.

Current: .5 Amperes

ORDERING INFORMATION: Model 5301-XX-*

XX = Standard Lengths in Inches, 12" and 24"

* = Color, -0 Black, -2 Red

Ordering Example: 5301-12-2 Indicates 12", color is red.

5521 Kit contains 10 pieces of model 5301-24, 1 each of 10 colors.

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = ± 0.005 " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.