

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










5310F Series T-1 LED Circuit Board Indicator

Description and Features

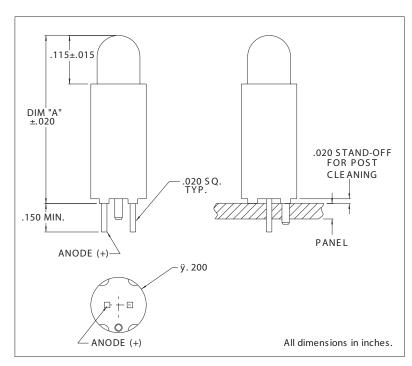

Features

- Block mounting, height and spacing alignment saves assembly cost and time.
- · Standoffs prevent flux entrapment.
- Press-in mounting pin secures assembly to PC board while soldering.
- RoHS Compliant

Housing: Black Nylon, UL94V-O

Alternate LEDs are available in this package as

standard variations.

Refer to "Mounting Hole Pattern 4.pdf"

Electro-Optical Characteristics and Ratings

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ (V)	Forward o.Voltage Max (V)	Reverse Break-down Voltage Min. (V)	Peak Wavelength (nm)	DIM A (inches)
5310F1	Red	10	10	30	2.0	3.0	5	650	.580
5310F3	Amber	7	10	30	2.2	3.0	5	603	.580
5310F5	Green	16	10	30	2.2	3.0	5	562	.580
5310F7	Yellow	6.3	10	30	2.1	3.0	5	585	.580

