



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



★ 11/18 15/32 ★
PULL OUT
DIRECTION

注記 NOTES


1. 梱包数量 $\star 1000$ 個/リール NUMBER OF CONNECTORS: 1000PCS/REEL
2. リードテープ長さ LEAD TAPE LENGTH

リーダー部 (#7 & ☆7)

TOP TAPE
LEADER PART


(#7 & ☆7
未接着部

TOP TAPE
NON-BONDED PART

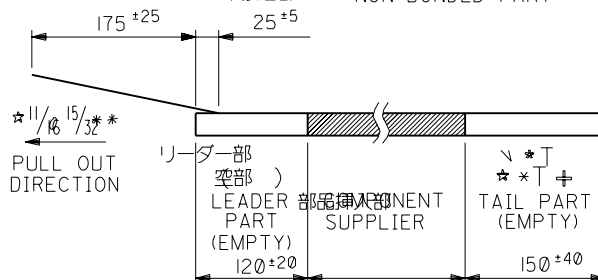

3. トップテープの剥離強度：（剥離方向は下図参照）
0.1N～0.7N(10.2gf～71.4gf) 尚、本規格値は、出荷時に適用。
（但し、輸送時に剥離が発生しない事。）

PEELING OFF FORCE OF TOP TAPE
0.1N ~ 0.7N (10.2gf ~ 71.4gf) (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION




4. $\diamond^{3/64}$

キャリアテープ：ポリプロピレン（PP）
トッパテープ：PET，PE，PEF
リール：紙製


MATERIAL

CARRIER TAPE:POLYPROPYLENE
TOP TAPE:PET,PE,PEF
REEL:CARD BOARD

トップテープ
TOP TAPE

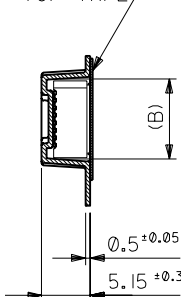


SECT. Z-Z

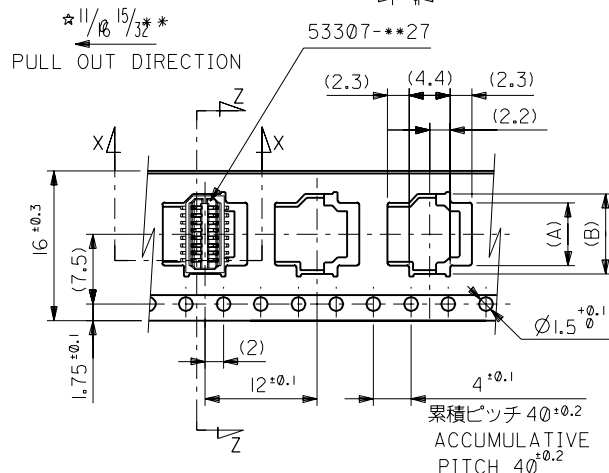

累積ピッチ 40 ± 0.2
ACCUMULATIVE
PITCH 40 ± 0.2

16mm幅キヤリアテープ

16mm WIDTH CARRIER TAPE

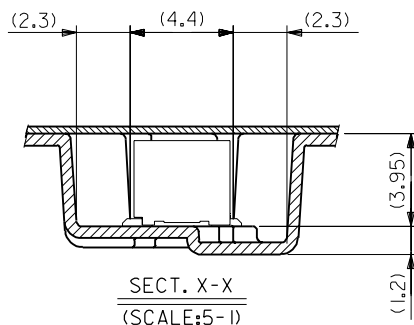


SECT. X-X
(SCALE:5-1)

16	16.4	9.3	7.5	53307-1891	18
		8.5	6.7	53307-1691	16
		7.7	5.9	53307-1491	14
		6.9	5.1	53307-1291	12
		6.1	4.3	53307-1091	10
キャリアテープ幅 CARRIER TAPE WIDTH	C	(B)	(A)	ENG. NO.	極数 CIRCUIT


[illegible]

DWG. NO.
SD-53307-***91


ソニー株式会社殿限定
FOR SONY

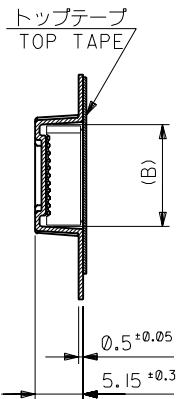


SECT. Y-Y

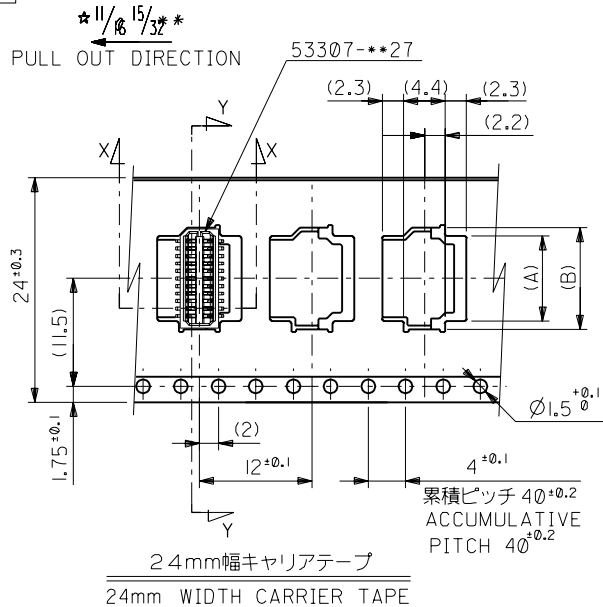


24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

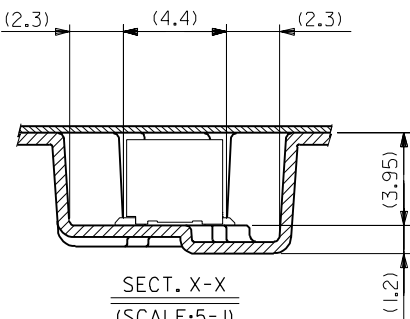


SECT. X-X
(SCALE:5-1)

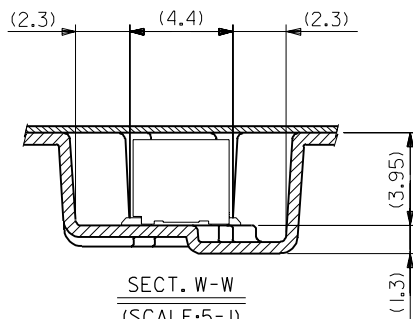

SECT. W-W
(SCALE:5-1)

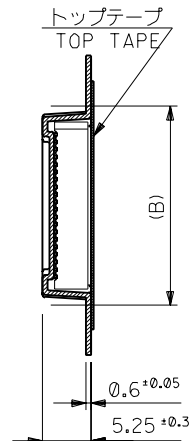

SECT. Z-Z

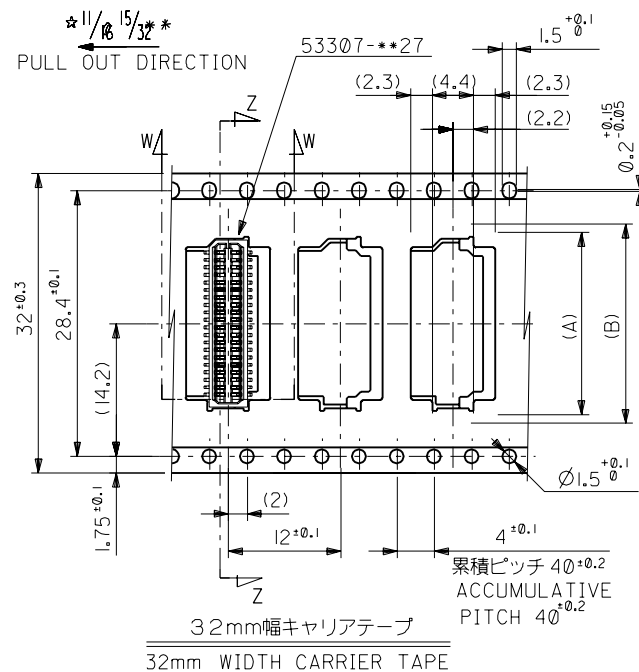

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	32.4	20.5	18.7	53307-4691	46
		18.9	17.1	53307-4291	42
		18.1	16.3	53307-4091	40
24	24.4	16.5	14.7	53307-3691	36
		15.7	13.9	53307-3491	34
		14.1	12.3	53307-3091	30
		13.3	11.5	53307-2891	28
		12.5	10.7	53307-2691	26
		11.7	9.9	53307-2491	24
		10.9	9.1	53307-2291	22
		10.1	8.3	53307-2091	20
キャリアテープ幅 CARRIER TAPE WIDTH	C	(B)	(A)	ENG. NO.	極数 CIRCUIT

材料 MATERIAL		SHEET 1 OF 2 参照 REFER TO SHEET 1 OF 2		材料 MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
仕上げ FINISH		適用電線範囲 WIRE RANGE		REVISE ONLY ON CAD SYSTEM	
被覆外径 INS. RANGE		DRAWN BY '94/2/28 S.AIHARA		TITLE 名称 53307-***27 テーピング梱包 EMBOSSED TAPE PACKAGE FOR 53307-***27	
新規格 PROPOSED		CHK'D BY '94/7/15 S.KUNISHI		DWG. NO. (SHEET 2 OF 2)	
変更内容 REVISION RECORD		APP'D BY '94/7/15 M.FUKUSHIMA		SD-53307-***91	
一般公差 GENERAL TOLERANCES		尺度 SCALE		REV D	

角度 ANGLE	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED
30°以上 OVER	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED
10°以上 OVER	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED
10°未満 UNDER	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED	変更 REVISED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので当社の許可なく複製を禁止する。
EN-01C(032)MXJ-32