



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 5343 Retractable Sheath Banana To BNC Male

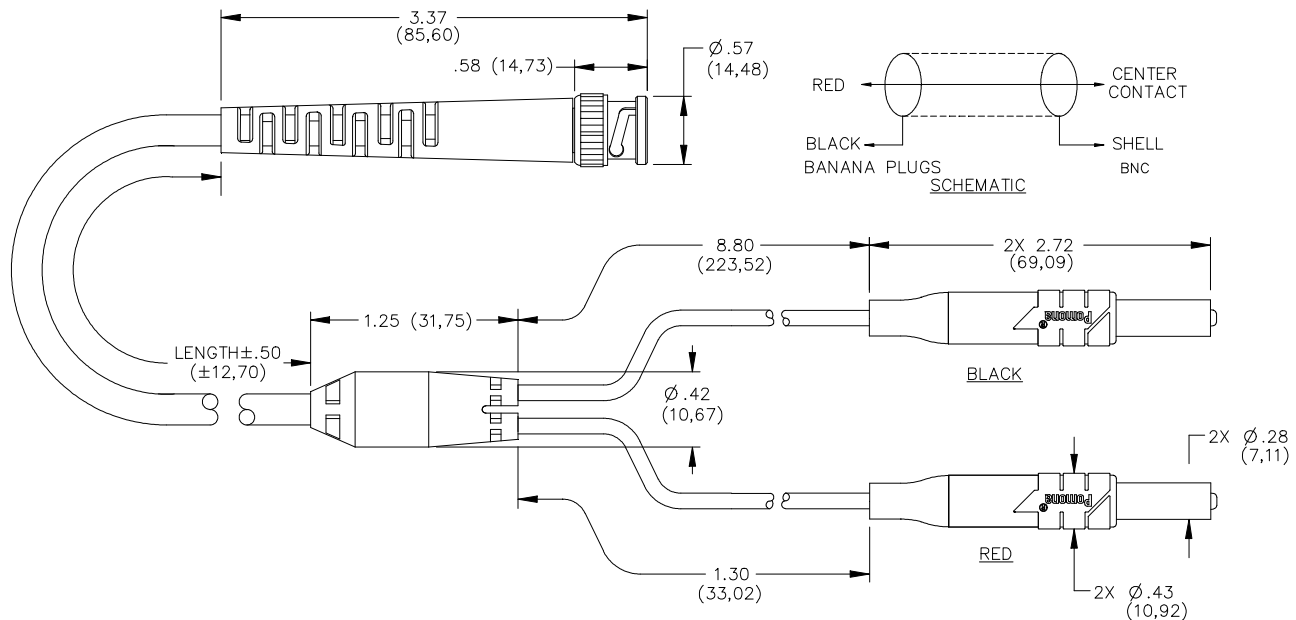

FEATURES:

- Retractable Sheath Banana Plug provided for use with older test equipment.

MATERIALS:

Conn: 1st End-Retractable sheath banana plug:

Spring: Beryllium Copper per QQ-C-533,

Cond. H.T.Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Plug Body: Brass Rod, per ASTM B16-85,

Temper HO2. Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Tip: Polypropylene. Color matches color of wire.

Compression Spring: Stainless Steel 302.

Insulation: Polypropylene molded to plug body

and wire. Color matches color of wire.

Wire: 20 AWG stranding 41 x 36 T.C., PVC insulated, 2.21 (.087) O.D. Color: One Black and one Red.

Molded Breakout: PVC molded to breakout leads and cable. Color: Black

Cable: Shielded coaxial RG58C/U, 4.95 (.195) O.D.

Color: Black. Marking: "POMONA 5343-C-

XX".Conn: 2nd End-BNC Male Connector Body and fittings: Tarnish resistant. Center Contact: Gold plated per requirements of MIL-C-39012.

Strain Relief Boot: PVC molded to BNC plug and cable. Color: Black

RATINGS:

Environmental: Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: Shield-Earth: 30VAC/60VDC, Inner Conductor-Shield: 500 VRMS Max.

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 5343-C-XX

XX=cable length, standard length: 36" (914) & 60" (1524)

Ordering Example: 5343-C-60 (1524)

Upon request other lengths may be quoted