



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



535 Series Optocouplers

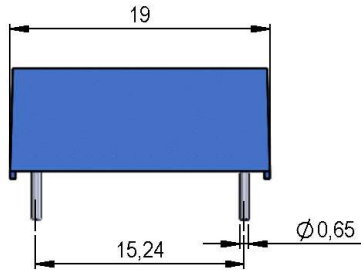

- Features: ATEX Optocoupler for Intrinsically Safe Circuits
- Applications: Electronics for Mining, Test & Measurement, Automation Technology
- Markets: Oil & Gas Production, Refinery, Mining, Medical, Test and Measurement, and others

Part Description: **535-04-0-i**


Customer Options		Unit
Coupler Characteristics		
Isolation Voltage Input / Output (min.)	4,000	VDC
Current Transfer Ratio (min.) Ic/I _f CTR (I _f = 10mA)	0.5	
Turn On Time (typ.) T _{on}	19.5	µsec
Turn-Off Time (typ.) T _{off}	212	µsec
Collector-Emitter Voltage (max.)	32	VDC
Collector Current I _c (max.)	50	mA
Creeping Distance (min.)	14.5	mm
Air Path Input / Output (min.)	14.5	mm
Insulation Resistance Input / Output (min.)	10 ¹³	Ohm
Transmission Frequencies (typ.)	2	kHz

Housing and Material Specifications	
Housing Material	Plastic
Case Color	Blue
Sealing Compound	Polyurethan
Connection Pins	Cu-Alloy Tinned
Washability	Fully Sealed

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 85	°C
Storage Temperature	-40 to 100	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

Handling Instructions

➤ It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESC.

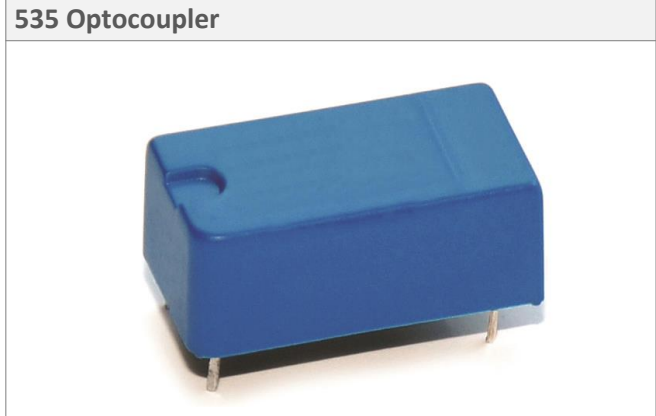

Test Circuit and Layout

Test Circuit

Layout