



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832





Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
D		REVISED PER ECO-13-015151		13DEC2013	FL	FY	

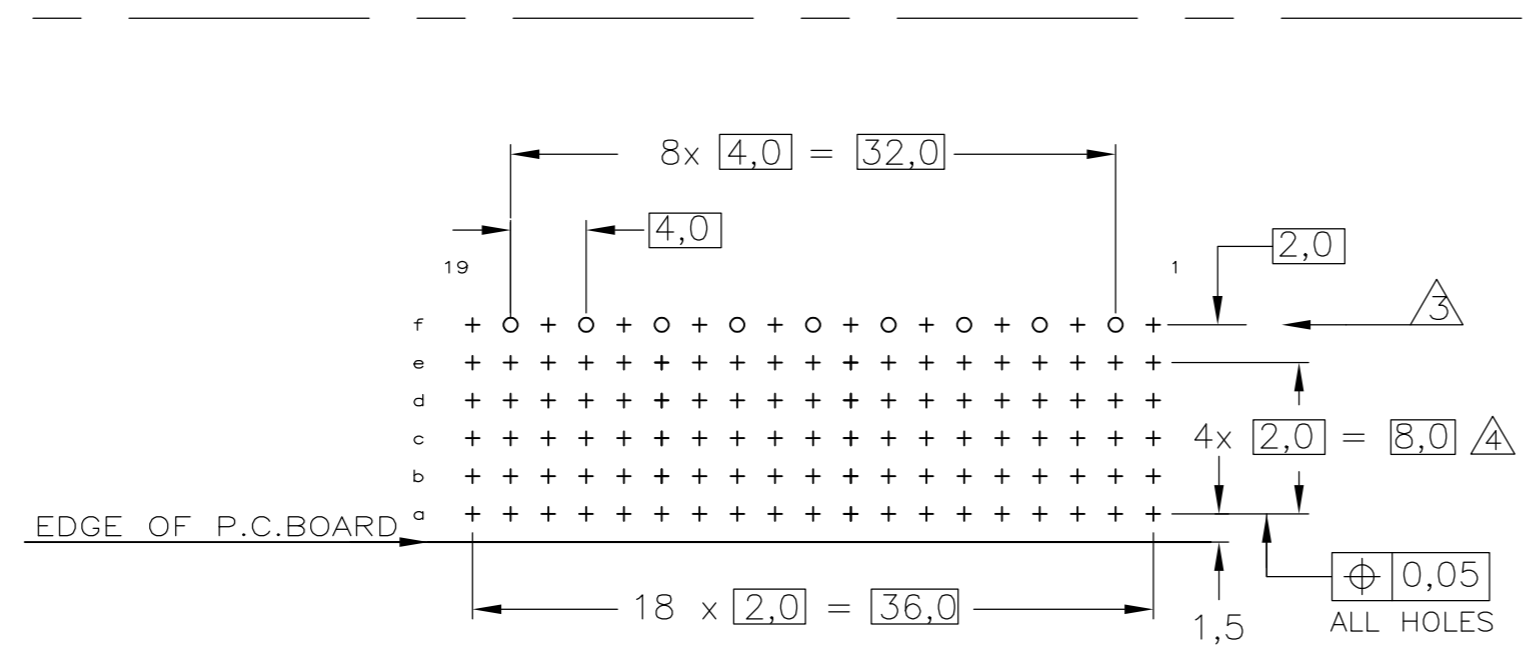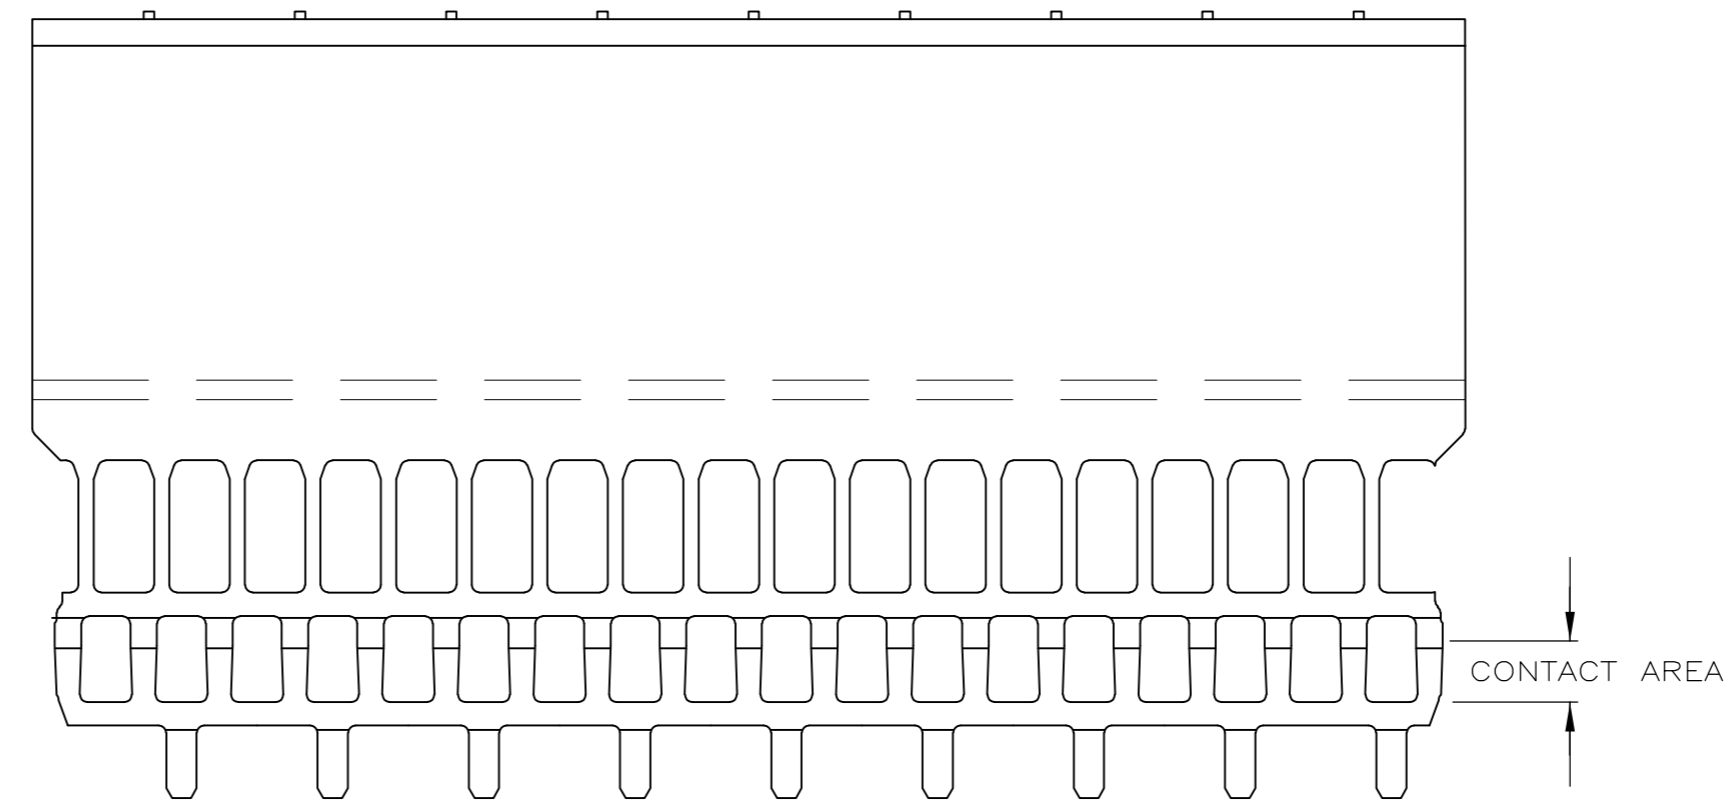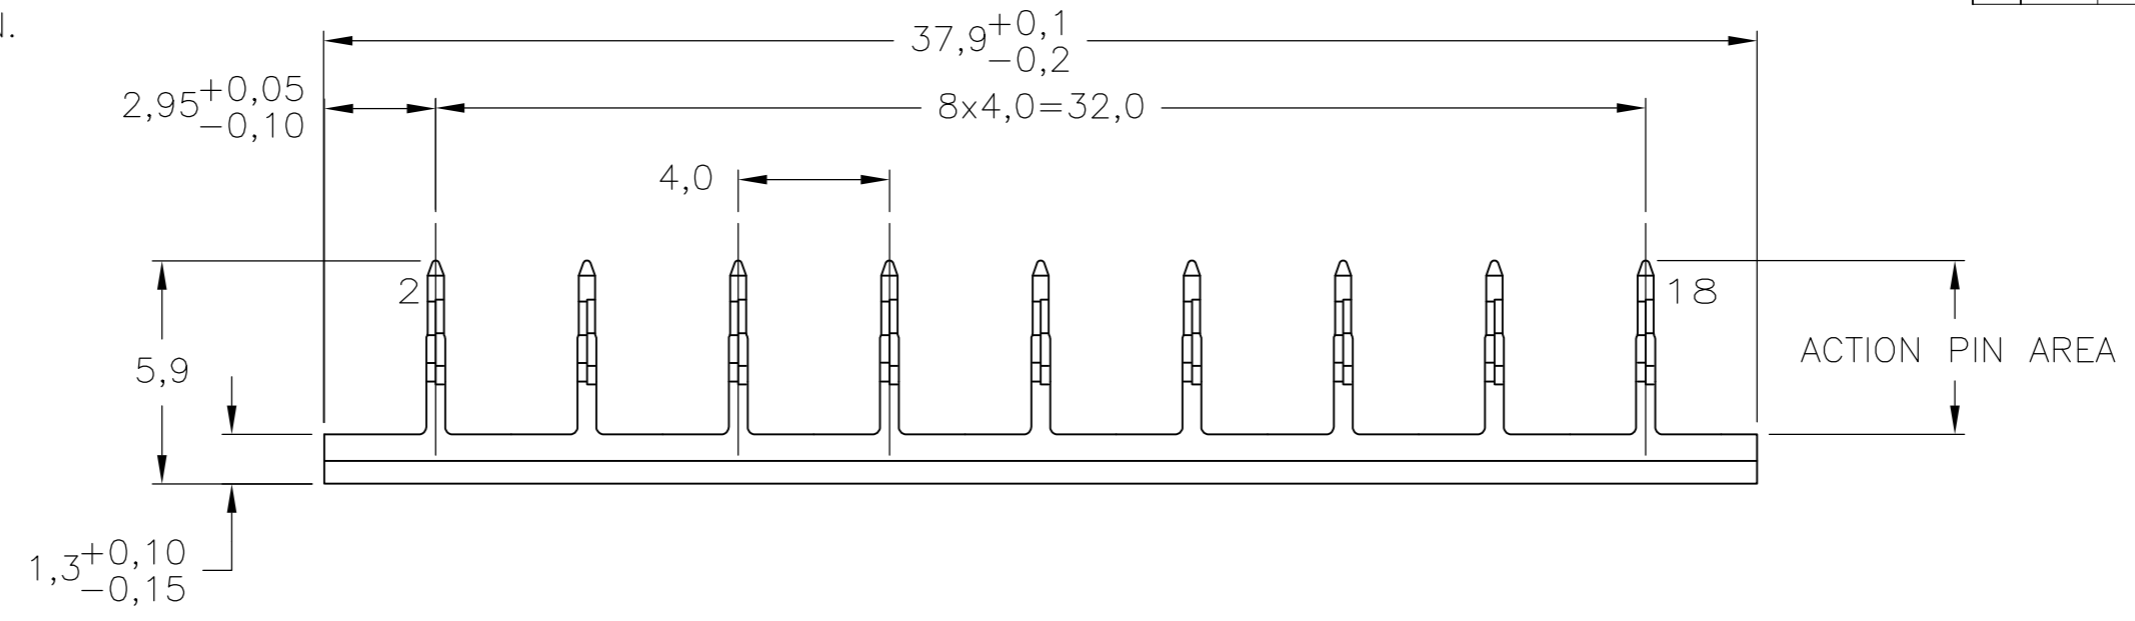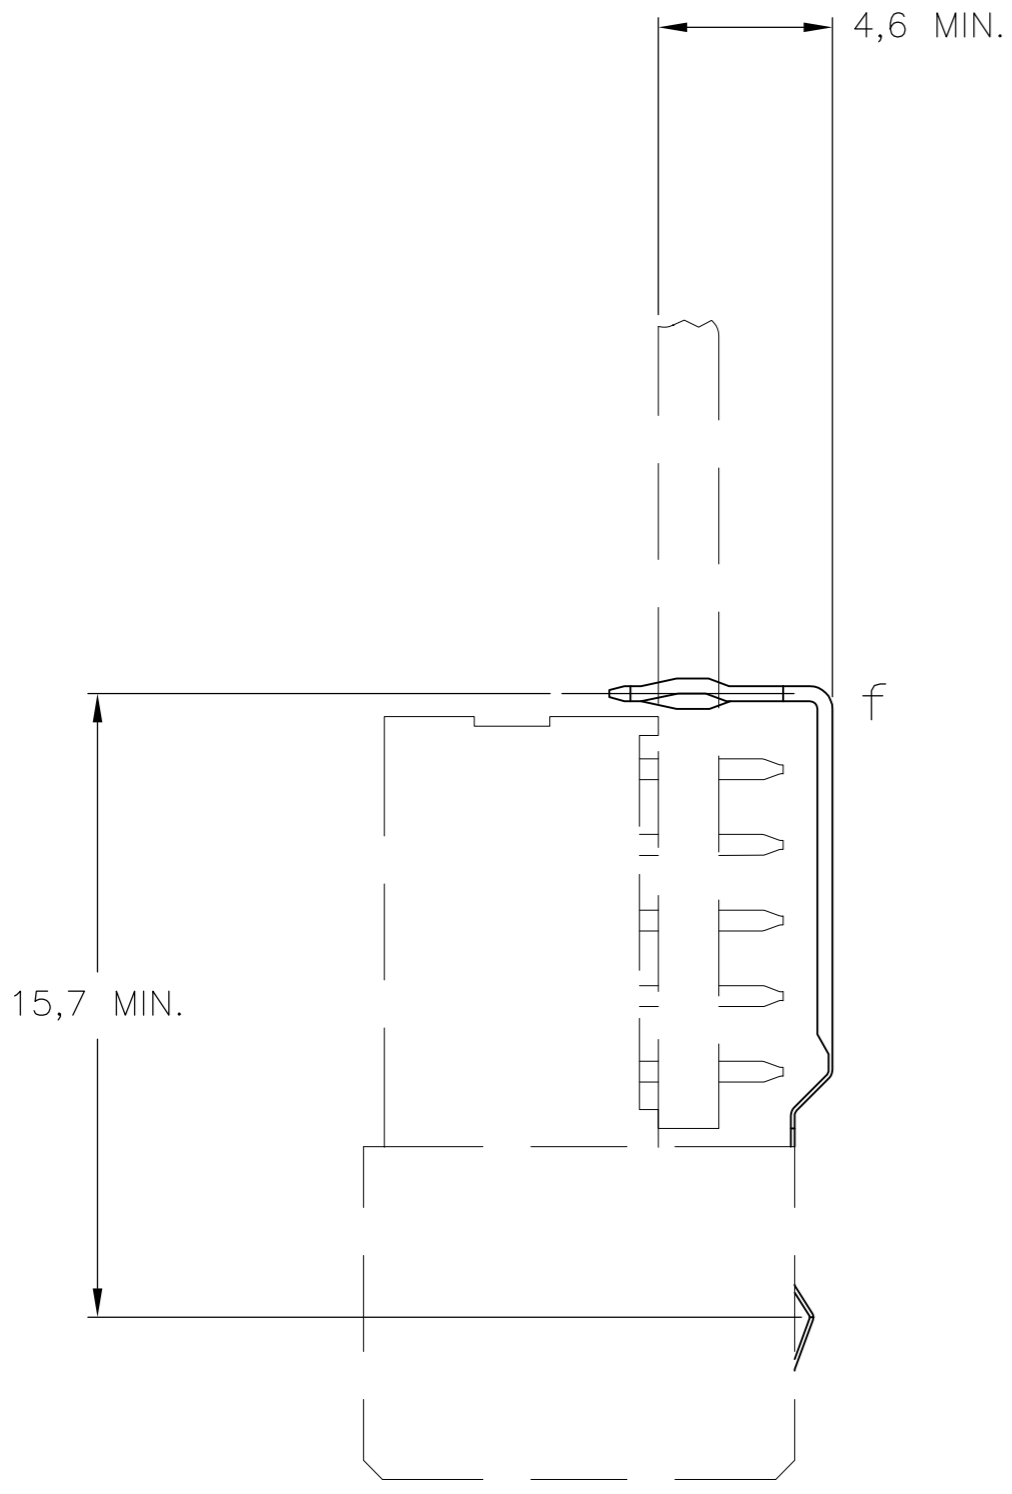

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS: SEE
 APPLICATION SPECIFICATION

NOTES:

- 1 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- 2 MATERIAL; PHOSPHORBRONZE.
- 3 ROW "f" 9 PLATED THROUGH HOLES FOR LOWERSHIELD.
- 4 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS WITH UPPERSHIELD, 95+10 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID MAX. BOARD THICKNESS 3,5 mm.
- 5 SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 7 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 8 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- 9 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
- 10 0.76µm MIN GOLD PLATING AT MATING SURFACE.

FINISH	MATERIAL	PARTNUMBER
1 8 11	2	4-5352029-0
1 6 10	2	5352029-9
1 8	2	5352029-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 14AUG04	TE Connectivity													
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2	CHK B.MOOIJ 25MAR05	Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE B-19 COLUMNS													
<table border="1"> <tr> <td>6-PLC</td> <td>±</td> </tr> <tr> <td>1-PLC</td> <td>±</td> </tr> <tr> <td>2-PLC</td> <td>±</td> </tr> <tr> <td>3-PLC</td> <td>±</td> </tr> <tr> <td>4-PLC</td> <td>±</td> </tr> <tr> <td>ANGLES</td> <td>±</td> </tr> </table>		6-PLC	±	1-PLC	±	2-PLC	±	3-PLC	±	4-PLC	±	ANGLES	±	APVD B.MOOIJ 25MAR05	NAME 108-19082	SIZE A2
6-PLC	±															
1-PLC	±															
2-PLC	±															
3-PLC	±															
4-PLC	±															
ANGLES	±															
MATERIAL		PRODUCT SPEC 114-19029	APPLICATION SPEC	CAGE CODE 00779												
FINISH		WEIGHT	DRAWING NO C=5352029	RESTRICTED TO												
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 of 1	REV D												