



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## 5360 Series T-1 Right Angle 4 Wide LED Assembly

### DESCRIPTION AND FEATURES

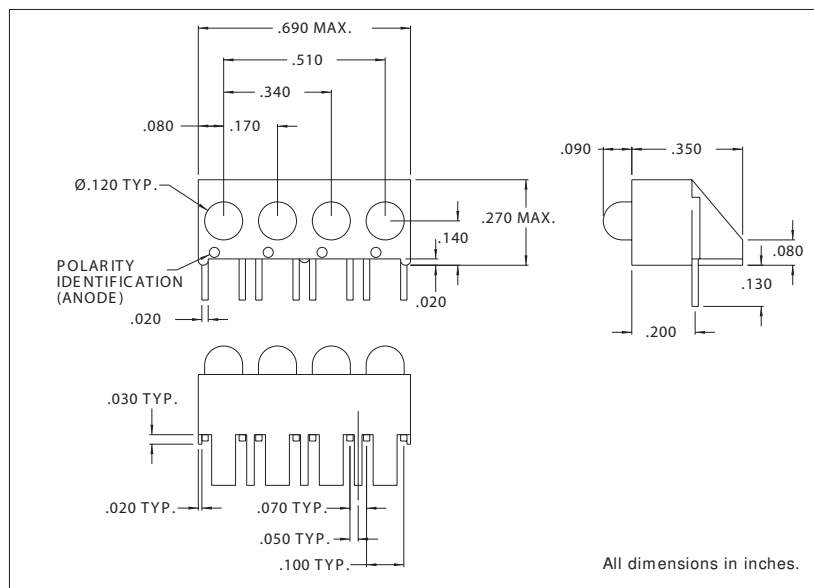

#### Features

- Quad assembly with 4 T-1 LEDs permits easy installation, assures matched height and center to center spacing, reduces assembly time and costs.
- High Brite and Super Brite LEDs, high light output, diffused lens.
- Standoffs prevent flux entrapment.
- Low current-only 2 mA needed.

Housing: Black Nylon, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation.

Mounting hole pattern on page 1-X7.

### ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
5360F1	Red	10	10	30	2.0	3.0	5	650
5360F3	Amber	7	10	30	2.2	3.0	5	603
5360F5	Green	16.3	10	30	2.2	3.0	5	562
5360F7	Yellow	6.3	10	30	2.1	3.0	5	585
5360F1LC	Red	2.5	2.0	7	1.8	5	5	635
5360F5LC	Green	2.1	2.0	7	1.8	2.2	5	565
5360F7LC	Yellow	1.8	2.0	7	1.9	2.7	5	585
5360F1-5V	Red	8	10	20	5	7.5	5	635
5360F3-5V	Amber	8	10	15	5	7.5	5	583
5360F5-5V	Green	8	12	15	5	7.5	5	565