



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2007
 © COPYRIGHT BY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
A1	-	B1	REVISED PER ECO-11-005150	28MAR11	RK	HMR

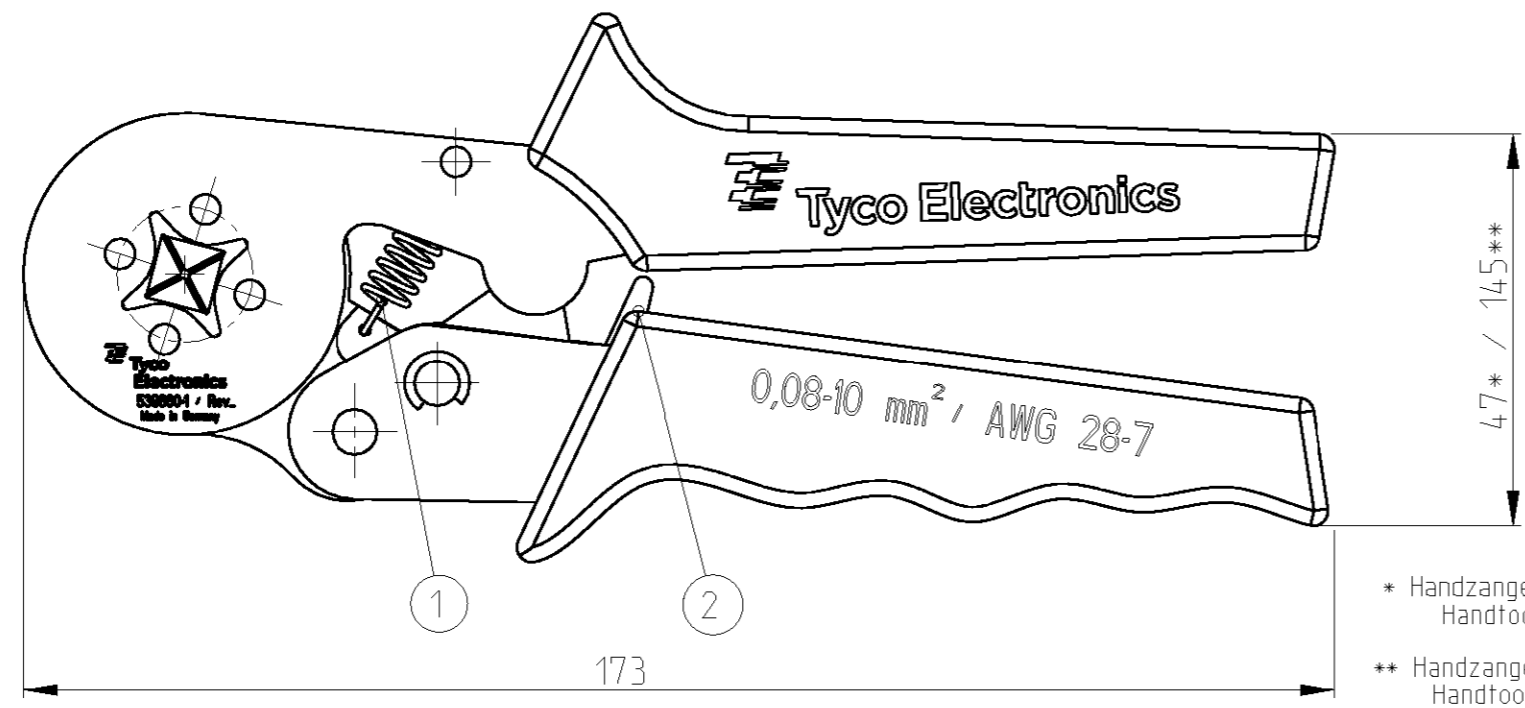

* Handzange geschlossen
Handtool closed
 ** Handzange geoeffnet
Handtool open

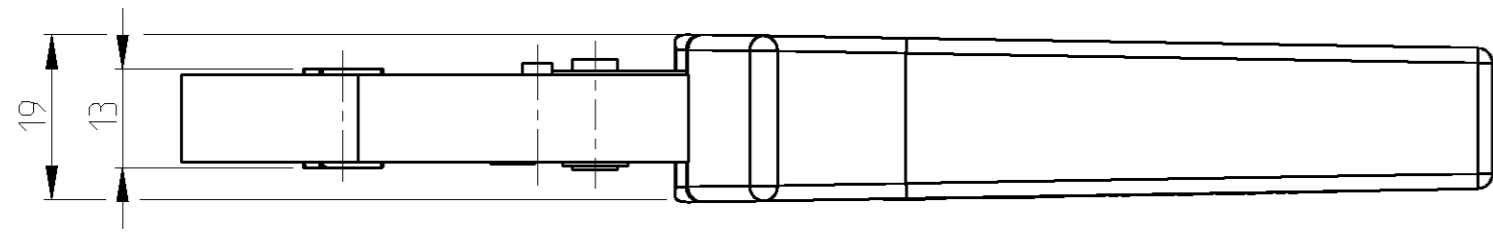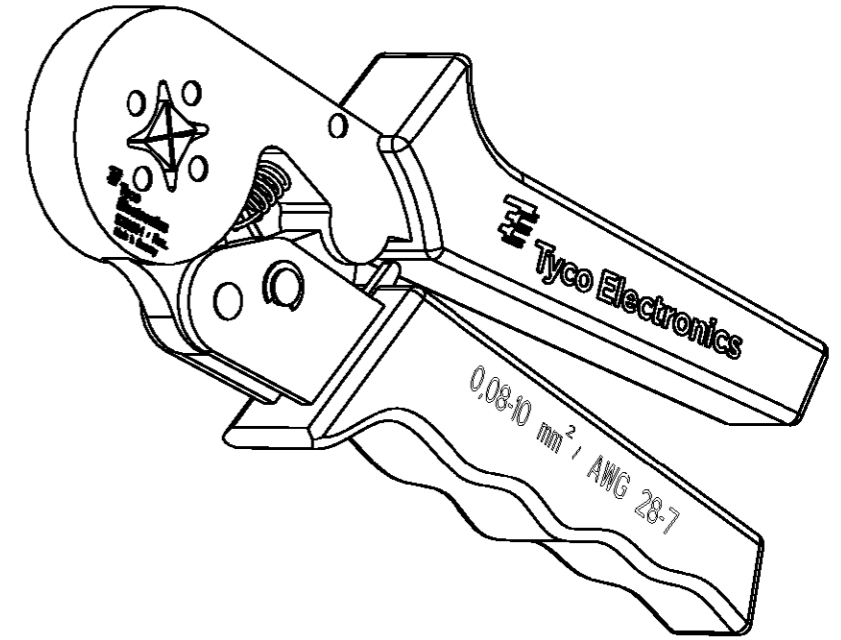

Handzange mit vier profilierten Crimpflaechen. Querschnittsbereich 0,08 - 10 mm²
 Hand tool with four serrated crimp surfaces. Wire size range 0,08 - 10 mm²

Handzange geeignet zum Crimpen von Aderendhuelsen mit und ohne Kunststoffkragen nach DIN 46228 - Teil 1 und Teil 4. Maximale Crimplaenge 13 mm
 Hand tool able to crimp wire ferrules with or without plastic sleeves according to DIN 46228 - Part 1 and Part 4. Maximum crimp length 13 mm

TE Connectivity Aderendhuelsen **TE Connectivity** PN 966066 und 966067 koennen mit dieser Handzange (max. Crimplaenge 13 mm) verarbeitet werden.
TE Connectivity wire ferrules **TE Connectivity** PN 966066 and 966067 can be processed with this hand tool (max. length 13 mm)

Hand tool mit Bedienungsanleitung 411-18232 im Karton verpackt
 Hand tool packed in a card board with instruction sheet 411-18232

Ersatzteile / Spare parts

TE CONNECTIVITY PN	DESCRIPTION	POS.
5-539783-0	Zugfeder/pull spring	2
5-539783-1	Zugfeder/pull spring	1

DIMENSIONS: mm-DIN 7168-m		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN U.Reuter	13FEB2002	TE TE Connectivity	
		0 PLC ±	1 PLC ±	CHK	-		
MATERIAL		2 PLC ±	3 PLC ±	APVD	-	NAME Handzange fuer Aderendhuelsen Handtool for Wire Ferrules	
FINISH		4 PLC ±	ANGLES ±	PRODUCT SPEC	-	SIZE	A 3
				APPLICATION SPEC	-	CAGE CODE	00779
				WEIGHT	380 g	DRAWING NO	©=539660-1
				CUSTOMER DRAWING		RESTRICTED TO	-
				SCALE	1	SHEET	1 OF 1
						REV	B1