



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VersaPad® USB Data Sheet

USB Touchpad for Mousing Applications

Features and Benefits

- Enumerates as a standard three-button
- HID-compliant mouse
- Requires no additional driver
- Tap for left-click
- Double tap
- Tap and drag
- Drag edge lock
- Border scroll
- Actuator can be a stylus, a finger, or a gloved hand



Description

The Interlink Versapad® touchpad is Interlink's mousing solution for OEM and rugged applications. The module's tough moisture resistant surface can be used with a finger, stylus, or glove; even in harsh environments.


The VersaPad enumerates as HID mouse with Left and Right Click capabilities using the native Operating System's mouse drivers. A Hardware Development Kit is available. Call us to order at 805-484-8855

Some Applications

- Industrial Computers
- Rugged/Military Notebook Computers
- Desktop Keyboards
- Handheld PCs
- Digital Media Players

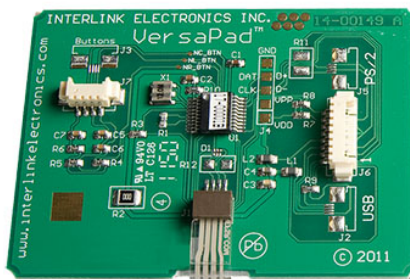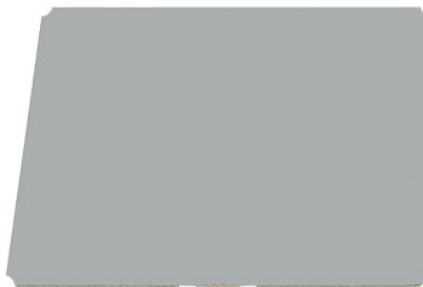

Header Version
(board to wire)

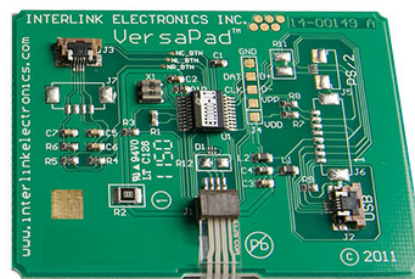

FFC Version

VersaPad® USB Data Sheet

USB Touchpad for Mousing Applications

Device Characteristics

Overlay Color	Dark Gray, Pantone 425C
Actuation Force	.05N-.3N (5g – 30g)
Weight	15 grams or less
Operating Temperature Performance	Functional before, during, and after exposure to the below conditions:
Cold Dry	-20°C <=5%RH for 96 hours
Cold Humid	10°C 95%RH for 96 hours
Hot Dry	50°C <5%RH for 96 hours
Hot Humid	60°C 95% for 96 hours
Storage Temperature Performance	Functional after 96 hours of exposure to the below conditions:
Cold Dry	-40°C <=5%RH
Hot Dry	70°C <=5%RH
Hot Humid	70°C 95%RH
Thermal Shock	Functional after 20 cycles of -40°C to 70°C with a 30 minute dwell time and 5 minute transitions
Lifetime Durability	>5 million stylus strokes at -150g+/-10g at +23°C and +°70
Standing Load Durability	Vertical static load 1kgf max for 1 hour
Tap Durability	>1,000,000 cycles at 1kgf/silicone finger/4Hz at +23°C and +°70
Drop	Dropped from 122cm (48 in.) onto concrete
Mechanical Shock	Comparable to MIL-STD-202, 80G accelerated in 11 msec
Mechanical Vibration	Comparable to MIL-STD-202, Method 204, Condition A
Altitude – Operating 10,000 ft	Functional before, during, and after exposure to altitude pressure simulation in vacuum (1 hour)
Altitude – Storage 30,000 ft	Functional before, and after exposure to altitude pressure simulation in vacuum (1 hour)
UL	All materials UL grade 94 V-1 or better
RoHS	Compliant
Stylus recommendations:	
Material	Acetal or Teflon
Minimum radius of tip	1.5mm
EMI	See notes from PS
ESD	See notes from PS


VersaPad® USB Data Sheet

USB Touchpad for Mousing Applications

Connector Options

Header


One connector option for the VersaPad is to use wire to board header connectors. The J7 header (Molex #53261-0471) is used for connecting external mouse buttons, the J6 (Molex #53261-0871) is the USB communication header.



Application Information

VersaPad Module Bezel Mounting Concept

A general bezel mounting method is one possible way to mount the VersaPad Module

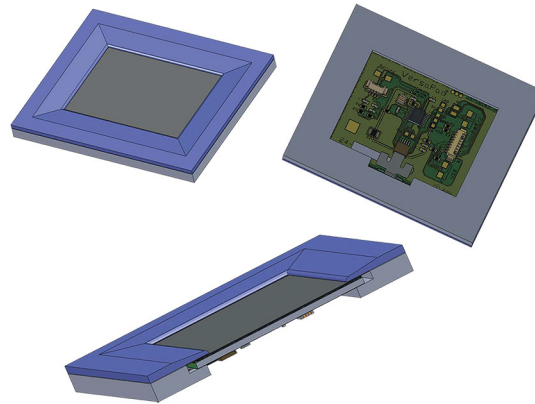

Header Wire and Cable Options

- 12" Wire Cable Harness, PN 14-16576
- USB Cable Assembly, PN 14-00054
- USB Cable Assembly with Strain Relief, PN 14-00108


FFC

The VersaPad is also available in a Flat Flex Cable (FFC) connector option. The FFC is used in two places: the J3 for buttons, and the J2 for the USB communication.

Manufacturer: FCI



Part Number: SFV4R-1STE1LF

Refer to the manufacturer's datasheet for more information.



Bezel Concept Critical Dimensions

Indicated are the critical dimensions associated with the VersaPad Module

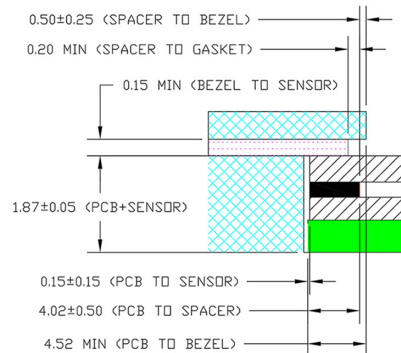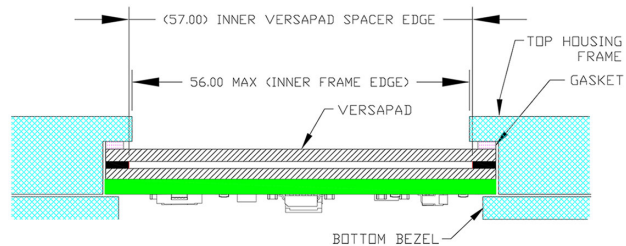

VersaPad® USB Data Sheet

USB Touchpad for Mousing Applications

Orderable Part Numbers

Hardware Development Kit, 54-00007

This Hardware Development Kit includes:

- USB VersaPad, FFC Connectors (Qty. 1)
- USB VersaPad, Molex Connectors (Qty. 1)
- USB VersaPad, Demo Model (Qty. 1)
- Demo Model Graphic Overlay (Qty. 1)
- 12" Wire Cable Harness (Qty. 1)
- FFC Cables (Qty. 2)
- FFC Connectors (Qty. 3)
- USB Flash drive with product literature (Qty. 1)

USB VersaPad FFC, PN 54-00089
(replaced PN 54-00030, still available)

USB VersaPad Molex, PN 54-00088
(replaced PN 54-00031, still available)


USB VersaPad FFC Features Disabled,
PN 54-00096

USB VersaPad Molex Features Disabled, PN 54-00097

USB Cable Assembly, PN 14-00054

USB Cable Assembly with Strain Relief, PN 14-00108

12" Wire Cable Harness, PN 14-16576

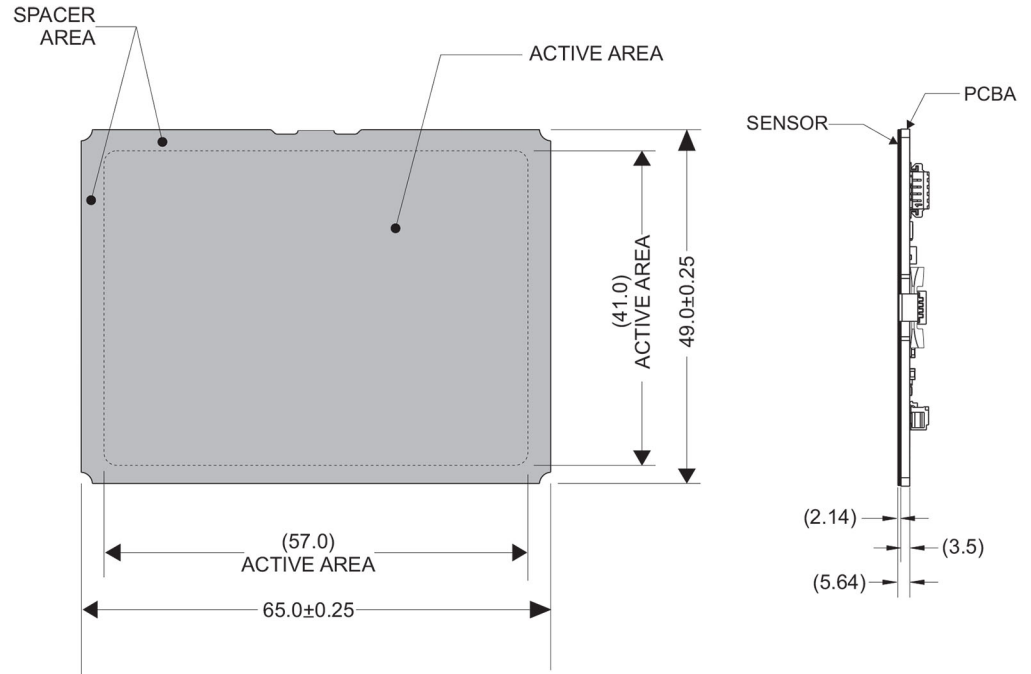

Contact Us

United States Corporate Office

Interlink Electronics, Inc.
31248 Oak Crest Drive
Suite 110
Westlake Village, CA 91361 USA
Phone: +1 (805) 484-8855
Fax: +1 (805) 484-9457
www.interlinkelectronics.com
Sales & Support: sales@iefsr.com