



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 (C) COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LT/R	DESCRIPTION		DATE	DWN	APVD	
AA	00	C1	ECR-09-004284	16APR2009	TY	SY	

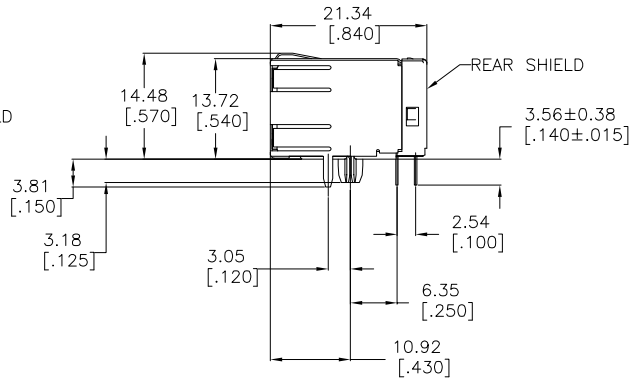
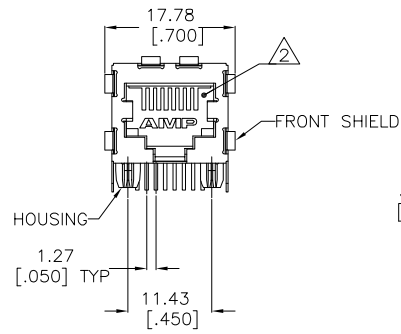


- MATERIAL: HOUSING - NYLON, COLOR: BLACK, UL 94V-0. OVERMOLDED TERMINAL ARRAY - PBT, BROWN. TERMINALS - 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27µm[.000050] MINIMUM HARD GOLD IN LOCALIZED AREA AND 3.81µm[.000150] MINIMUM TIN-LEAD IN SOLDER AREA OVER 1.27µm[.000050] MINIMUM NICKEL UNDERPLATE. SHIELD - 0.254[.010] THICK COPPER ALLOY PLATED WITH 1.27µm[.000050] MINIMUM NICKEL AND 2.03µm[.000080] MINIMUM HOT TIN DIP ON PCB GROUND TABS.

△ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

△ USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

- DIELECTRIC WITHSTANDING VOLTAGE BETWEEN SHIELD AND TERMINAL IS 1500 VAC

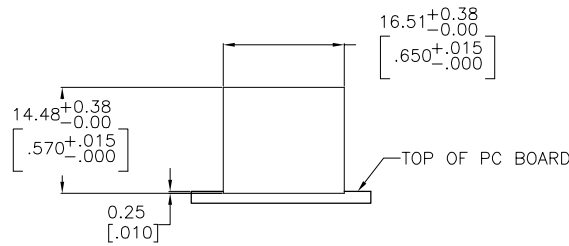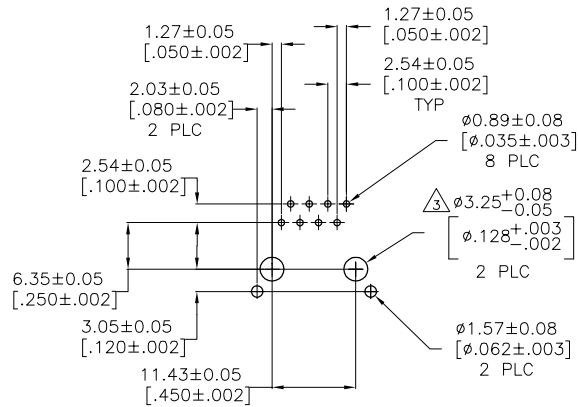

SUGGESTED PANEL CUTOUT

SUGGESTED PANEL CUTOUT

5406296-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN: A.MAYER 18JAN2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK: J.WESTMAN 18JAN2005	NAME: S.FLICKINGER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.FLICKINGER 18JAN2005	PRODUCT SPEC: 108-1163-2	
0 PLC ± -		APPLICATION SPEC: 114-2048		
1 PLC ± -		SIZE: A2		
2 PLC ± 0.25[.01]		CAGE CODE: 00779		
3 PLC ± 0.13[.005]		DRAWING NO: 5406296		
4 PLC ± -		RESTRICTED TO: -		
ANGLES ± -		SCALE: 2:1		
MATERIAL: SEE NOTE 1		SHEET: 1 of 1		
FINISH: SEE NOTE 1		REV: C1		
CUSTOMER DRAWING				