



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 5423 BNC Male With Molded Strain Relief To Minipincer® Test Clips

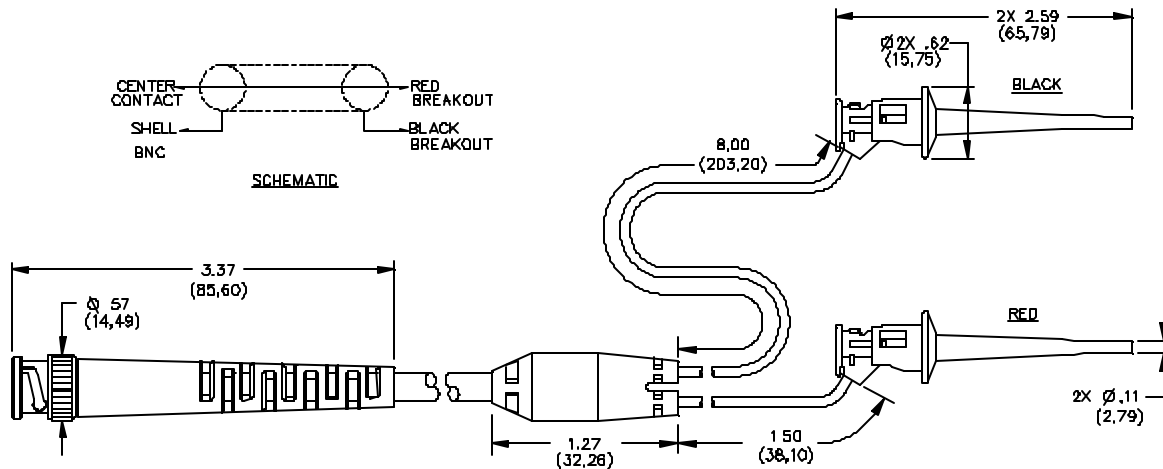

FEATURES:

- Convert a BNC Female receptacle into Minipincer® Test Clips

MATERIALS:

Conn: 1st End - Minipincer® Test Clips. Selectively gold plated Beryllium Copper contact.

Insulation: Nylon

Color: One Black and one Red

Cable: RG58C/U, 5.0 (.195) O.D.; Y-Mold insulation, PVC, Black

Conn: 2nd End – Crimp BNC Male – Brass body, tarnish resistant plated.

Center Contact: Brass, gold plated

Boot: PVC, Black

Marking: “POMONA 5423”

RATINGS:

Operating Temperature: +50° (+122°F) Max.

Operating Voltage: 300 VRMS Max.

Current: 5 Amperes

ORDERING INFORMATION: Model 5423-C-XX

XX= Cable Length, Standard Length: 18” (457), 24” (610), 36” (914), 48” (1219), 60” (1542)

Ordering Example: 5423-C-60 indicates 60” in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA