



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



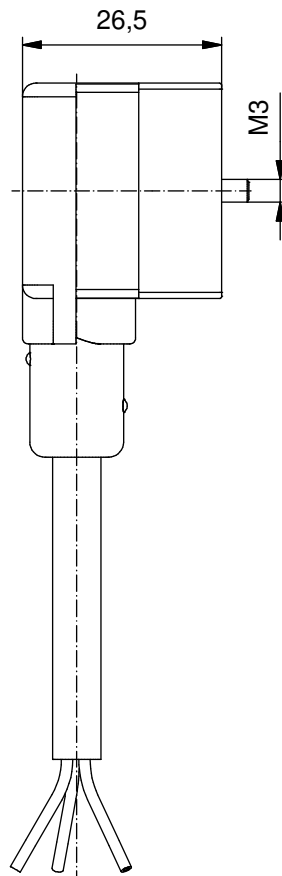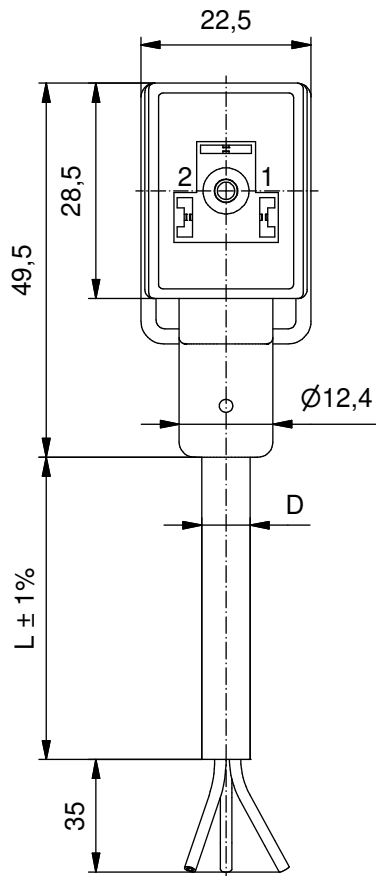


Technische Daten:


Bemessungsspannung: 230 V AC / DC
 Strombelastbarkeit: 4 A bei 40°C
 EN 60512-5-2 5b
 Verschmutzungsgrad: 3
 IEC 60664-1
 Schutzart: IP 67, im verschraubten Zustand
 IEC 60529
 Umgebungstemperatur: -25°C ... +80°C
 IEC 60664-1
 Steckzyklen: >50
 DIN EN 175301-803

Werkstoffe:


Kontaktmaterial: CuZn
 Kontaktfläche: Ni, Sn gal.
 Kontaktträger: PA GF, UL 94
 Griffkörper: TPU, UL 94, schwarz

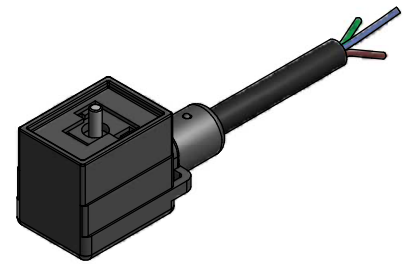

**Achtung
 Änderung**



Kontaktbelegung:



Art.-Nr.:	Bezeichnung:	Länge L:	Kabel:
55-00127	SAL - B - V2PE - 180 - 0220 - 2 / H2	2m	PUR/PVC, schwarz, 3x0,5mm ² , LiYY11Y Kabel: 781-H25300
55-00006	SAL - B - V2PE - 180 - 0220 - 3 / H2	3m	
55-00007	SAL - B - V2PE - 180 - 0220 - 5 / H2	5m	
55-00128	SAL - B - V2PE - 180 - 0220 - 10 / H2	10m	
55-00129	SAL - B - V2PE - 180 - 0220 - 2 / A2	2m	PVC, schwarz, 3x0,5mm ² , LiYY Kabel: -
55-00130	SAL - B - V2PE - 180 - 0220 - 3 / A2	3m	
55-00131	SAL - B - V2PE - 180 - 0220 - 5 / A2	5m	
55-00132	SAL - B - V2PE - 180 - 0220 - 10 / A2	10m	TPU, UL 20549, schwarz, 3x0,75mm ² , Li9Y11Y Kabel: 781-K17300
55-00139	SAL - B - V2PE - 180 - 0220 - 2 / K1 / 075	2m	
55-00140	SAL - B - V2PE - 180 - 0220 - 3 / K1 / 075	3m	
55-00141	SAL - B - V2PE - 180 - 0220 - 5 / K1 / 075	5m	
55-00142	SAL - B - V2PE - 180 - 0220 - 10 / K1 / 075	10m	PVC, UL 2464, grau, 3x0,75mm ² , LiYY Kabel: 781-A37300
55-00143	SAL - B - V2PE - 180 - 0220 - 2 / A3 / 075	2m	
55-00144	SAL - B - V2PE - 180 - 0220 - 3 / A3 / 075	3m	
55-00145	SAL - B - V2PE - 180 - 0220 - 5 / A3 / 075	5m	
55-00075	SAL - B - V2PE - 180 - 0220 - 10 / A3 / 075	10m	

D siehe Datenblatt Kabel

CAD-Unterlage nicht manuell ändern Directive 2002/95/EC RoHS compliant	Index: a 02.02.11 VF Ä3731 Kontaktbelegung überarbeitet, Maß für Kabeldurchmesser entfällt, Datenblatt-Nr. für Kabel in Tabelle hinzu		Benennung: Ventilstecker Bauform B, ohne Schutzbeschaltung, PE um 180°gedreht									
				<table border="1"> <thead> <tr> <th></th> <th>Datum</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>gez.</td> <td>27.06.08</td> <td>Franz</td> </tr> <tr> <td>gepr.</td> <td>27.06.08</td> <td>Schmidt</td> </tr> </tbody> </table>		Datum	Name	gez.	27.06.08	Franz	gepr.	27.06.08
		Datum		Name								
	gez.	27.06.08		Franz								
gepr.	27.06.08	Schmidt										
Diese Zeichnung darf ohne unsere ausdrückliche, schriftliche Genehmigung weder vervielfältigt noch dritten Personen ausgehändigt werden. Eigentums- und Urheberrecht vorbehalten		Zeichnungsnr.: 55K1A010										
		Artikelnr.: siehe Tabelle										