



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



55110 Miniature Flange Mounting Proximity Sensor

RoHS



Description


The 55110 is a flange mounting hall effect sensor with integral LED for visual indication of operation, 34.00mm (1.339") x 14.00m (0.551") x 10.00mm (0.394") with a choice of digital outputs. It is available as three-wire (voltage output) version and it's case design enables screw or adhesive mounting. It is capable of switching up to 28Vdc and 20mA. It works best with the operating magnet with the Littelfuse part number H-58.

Features

- Magnetically operated position sensor
- Integral LED
- Medium or high sensitivities
- Three-wire (voltage output)
- Reverse/Over voltage protection
- Built in temperature compensation

Dimensions

Dimensions in mm (inch)

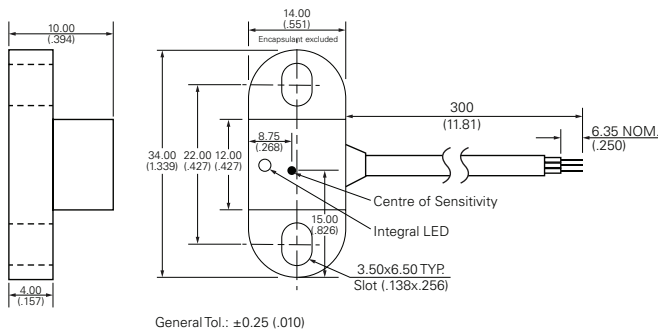


Benefits

- High switching speed up to 10kHz
- Long life - up to 1 billion operations
- Visual indication of operation
- Unaffected by harsh environments
- Operates in static or dynamic magnetic field
- Customer selection of cable length and connector type

Applications

- Position and limit sensing
- Magnetic encoders

Block Diagram

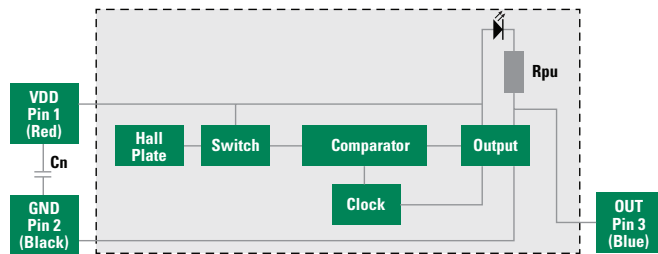

Note:

1. Add capacitor Cn as shown, close for the sensors for transient suppression if required.

55110 Miniature Flange Mounting Proximity Sensor

Electrical Ratings


Hall Type			Digital Switch Three-Wire (Voltage Output)
Supply Voltage ¹	Absolute Ratings Operate Overvoltage Protection	Vdc Vdc Vdc - max.	-15 to +28 +3.8 to +24 32
Output High Voltage		Vdc - min.	Vdd-2 @ 0.1mA (sinking output with internal pull-up)
Output Low Voltage		Vdc - max.	0.4 @ 10mA
Output Current (continuously on)		mA - max.	10
Switching Speed		Khz - max.	10
Temperature	Operating	°C	-40 to +85

Note:

1. As long as Tj (Junction Temperature) max. Is not exceeded.

Hall Options

Select Option	Hall Type	Sensitivity Gauss (typ.)	Activate - D mm (inch)
3M	3 Wire Switch	130	12.5 (.492)
3H	3 Wire Switch	59	18.0 (709)

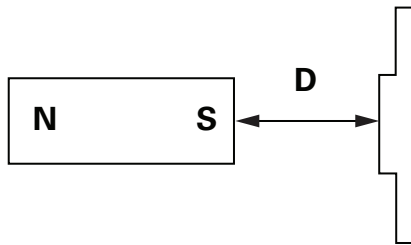




Note: Active distances are approximate using NEFEB Magnet 21 x 7 x 4.7 (.8271 x .276W x .185H) LITTELFUSE P/N H-58-MAGNET.

55110 Miniature Flange Mounting Proximity Sensor


Cable Length Specification

Cable Type: 24AWG 7/32/PVC 105°C Double Insulated	
Select Option	Cable Length mm (inch)
02	300 (11.81)

Termination Specification

Termination Options		
Select Option	Description (Two-wire versions illustrated)	
A	Tinned leads (6.4±0.76)mm	
F	Untinned leads (6.4±0.76)mm	
E	JST type XHP 2.5mm pitch	

Part Numbering System

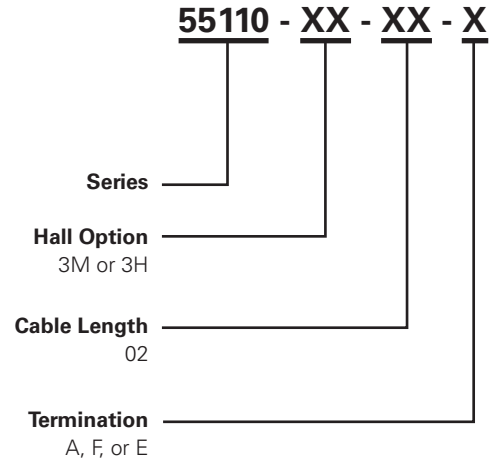

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
Bulk	Bulk	500	N/A	N/A