



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FLKM HDSUB-15/F


Order No.: 5528367

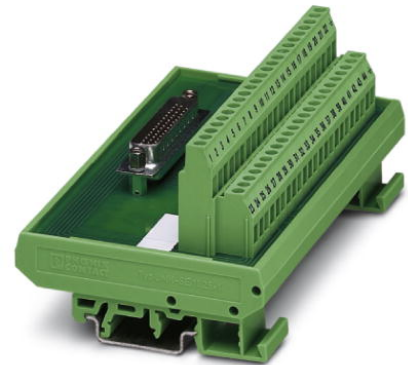

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5528367>

VARIOFACE module, with screw connection and high density D-Subminiature female connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 15, width: 57 mm

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  |
| sales group | I011 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 253 (IF-2007) |

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


| | |
|---|------------------|
| Nominal voltage U_N | 125 V |
| Max. current carrying capacity per branch | 1 A |
| Number of positions | 15 |
| Width | 57 mm |
| Height | 77 mm |
| Depth | 58 mm |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position | Any |

Connection data


| | |
|--|---------------------|
| Connection 1 | PCB connection |
| Connection in acc. with standard | IEC / EN |
| Type of connection | Screw connection |
| Number of positions | 15 |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max. | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Connection 2 | D-SUB connection |
| Type of connection | Pluggable |

Diagrams/Drawings

Circuit diagram

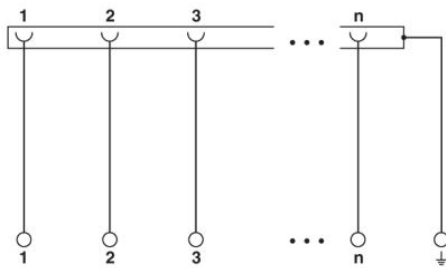

Schematic diagram

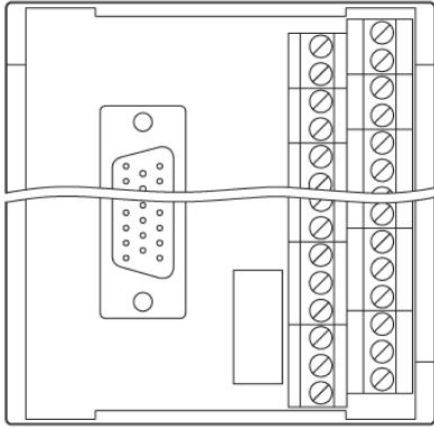

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;